



Perfecting the *Art* of Brewing.

Curtis[®]

2020 Equipment Catalog

Table of Contents

Innovation

G4 Technology	4-5
Curtis Cleaning Solutions	6-7
Curtis Nitro Infuser	8-9

Single Cup Brewers

Corinth™ Under Counter Hot Water Dispenser. . .	10-11
G4 Seraphim® Single Cup Coffee Brewers	12-13
G4 CGC Single Cup Coffee Brewers	14-15

Coffee Brewers

Satellite Brewers

G4 GemX™ IntelliFresh®/FreshTrac®1.5 Gallon Brewers. .	16-17
G4 Gemini® 1.5 Gallon Brewers	18-19
G3 GemX™ IntelliFresh®/FreshTrac®1.5 Gallon Brewers. .	20-21
G3 Gemini® 1.5 Gallon Brewers	22-23
Gemini® 1.0 & 1.5 Gallon Brewers	24-25

Thermal & Airpot Brewers

G4 ThermoProX® 1.5 Gallon Brewers	26-27
G4 ThermoProX® 1.0 Gallon Brewers	28-29
G3 ThermoProX® 1.5 Gallon Brewers	30-31
G4 ThermoPro® 1.5 Gallon Brewers	32-33
G4 ThermoPro® 1.0 Gallon Brewers	34-35
G3 ThermoPro® 1.5 Gallon Brewers	36-37
G3 ThermoPro® 1.0 Gallon Brewers	38-39
G3 Airpot Brewers	40-41
G3 Thermal Decanter Brewers.	42-43
G3 Low Profile Airpot Brewers.	44-45

Decanter Brewers

G3 Alpha® Decanter Brewers	46-47
Pourover Brewers	48-49

High Volume Brewers

Automatic Coffee Urns.	50-51
G4 Omega 3.0/6.0 Gallon Brewers	52-53

Cold Brew Coffee Systems

Cold Brew Coffee Systems	54-55
------------------------------------	-------

Tea Brewers

G4 Tea Brewers	56-57
G4 Tea/Coffee Combo Brewers	58-59
G3 Tea Brewers	60-61
G3 Tea/Coffee Combo Brewers	62-63
Liquid Iced Tea/Coffee Dispensers	64-65

Specialty Dispensers

Chill-X Frozen Beverage Machines	66-67
G3 Primo Cappuccino™	68-69
Café Primo Cappuccino™ Systems	70-71
Café Primo Cappuccino™ with Lightbox	72-73

Dispensers

Gemini® Satellite Dispensers & Warmers	74-75
Thermal Dispensers	76-77
Decanter Dispensers.	78-79
Iced Tea/Iced Coffee Dispensers	80-81

Misc. Equipment

Coffee Grinders	82-83
Hot Water Dispensers	84-85
Syrup Warmers.	86-87
Decanter Warmers	88-89








Accessories

Brew Baskets, Paper Filters & Sprayheads	90-97
CSC Water Filtration Systems	98
Airpot Racks & Drip Trays	99
Service Carts For 3.0 Gallon Dispensers	100-101

Curtis Support

About Curtis	102-103
Product Warranty	104
Terms of Sale.	105
Shipping Dimensions & Weights	106-109
Notes.	110
Cups Per Hour	111
Advanced Brew Basket Design	112-113

Icon Guide

 Dispenser Included	Brewer Comes Standard with Dispensers
 Dispenser Not Included	Brewer Does Not Come with Dispensers Please Order Separately
 Quick Ship	Ready to Ship (Domestic only, does not include export units)
 New Product	New Additions to the Curtis 2020 Equipment Product Offering
 Special Order	15 day lead time
 Cord & Plug Included	Includes NEMA 5-15P cord and plug
 Dual Voltage	120/220 Volts

G4 Technology

Intelligent. Intuitive. Instinctive. Artistic.

Ready to brew



Curtis[®]

Brewing technology at your fingertips

G4 Technology delivers advancements to make brewing and dispensing of hot, fresh, gourmet coffee and tea even easier. Its simple, icon-driven interface simplifies brewing operations, provides fast and intuitive training and reduces service calls and costs.

With a wide selection of features and programming flexibility, Curtis has taken coffee brewing technology to new heights with the Generation Four Brewing Systems.

■ G4 Features

- Large, 4.3" touch screen
- Icon-driven interface streamlines and simplifies operation
- On-screen instructions provide fast, intuitive training and reduce service calls
- Real time feedback of the brewing process helps eliminate user error
- Built-in self diagnostics alert operator of system failure and when preventive maintenance is needed
- Energy saving mode is easily customized to specific operator needs and applications
- Patented G4 digital controller used in multiple Curtis brewing systems, reducing parts inventory



Seraphim®



CGC Series



G4 Gemini® Series



G4 ThermoPro® Series



G4 Omega Series



G4 Tea Brewer Series

Curtis Cleaning Solutions



WC-79000
TABZ Z95
Coffee Equipment Cleaning
Tablets (90 count)

Features at a Glance

WC-79000 - TABZ Z95 Coffee Equipment Cleaning Tablets
 WC-79003 - TABZ Z61 Coffee Equipment Cleaning Tablets

- Offers a one-step cleaning to remove coffee oils from brewers and servers.
- Formulated with a blue dye for safe use in busy commercial environments.
- Organically listed by the Organic Materials Review Institute and NSF-Certified.

WC-79001 - One-Pro Beverage Equipment Cleaning Powder

- Thoroughly cleans cold beverage equipment and dispensing systems (cold brew, iced tea and frozen beverage machines) to ensure safe beverage preparation.
- Rinses clean, leaving behind no residue or odor.
- Powder form allows for easy shipping, storage, and handling.

WC-79002 - GRINDZ Grinder Cleaning Tablets

- Removes coffee residue and oils in standalone coffee grinders.
- All natural, completely food safe and gluten-free coffee bean shaped tablets, absorbs and loosens coffee grounds.
- Effectively cleans grinders without disassembling burrs or casings.
- Ideal for use to prevent flavor transfer when switching between regular, decaffeinated and flavored coffee beans.

Specifications

MODEL#	DESCRIPTION	CONTAINER HEIGHT x DIAMETER	SHIP WEIGHT
WC-79000	TABZ Z95 Coffee Equipment Cleaning Tablets (90 count)	7.75" x 4.00"	2.8 lbs.
WC-79001	One-Pro Beverage Equipment Cleaning Powder (4 lbs.)	7.13" x 5.00"	4.0 lbs.
WC-79002	GRINDZ Grinder Cleaning Tablets (15 oz.)	8.00" x 2.50"	1.1 lbs.
WC-79003	TABZ Z61 Coffee Equipment Cleaning Tablets (120 count)	8.00" x 2.50"	1.1 lbs.



WC-79001
 One-Pro
 Beverage Equipment Cleaning
 Powder (4 lbs.)



WC-79002
 GRINDZ
 Grinder Cleaning
 Tablets (15 oz.)



WC-79003
 TABZ Z61
 Coffee Equipment Cleaning
 Tablets (120 count)



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

Curtis Nitro Infuser






NIB 3

Features at a Glance

The Curtis Nitro Infuser incorporates needle valves to allow precise regulation of the nitrogen into the flow of any liquid that passes through the system to allow a consistent tasting drink time after time.

- Stainless Steel construction to prevent rusting in damp cold-conditions.
- Mounting bracket for ease of installation
- Compact design to allow an easy fit into any system.
- Nitrogen Infusion makes drink seem Sweeter, Thicker and-Creamy without adding any calories.
- Speedfit connection system allows for fast and accurate tubing installation for the Curtis Nitro-Infusion system.
- Exclusive patented design - Easy to install, easy to operate.
- Superior cascading with a dual vortex venturi design allows for accurate infusion of the nitrogen.

Curtis Nitro Infuser

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	SHIP WEIGHT	SHIP CUBE
NIB 1	Nitro Infuser Box, 1 Head	4.61" x 6.43" x 10.02"	5.0 lbs.	0.33 ft ³ 
NIB 2	Nitro Infuser Box, 2 Head	4.61" x 6.43" x 10.02"	5.0 lbs.	0.33 ft ³ 
NIB 3	Nitro Infuser Box, 3 Head	4.61" x 6.43" x 10.02"	5.0 lbs.	0.33 ft ³ 

Utility Requirements

MODEL #	BEVERAGE INLET	BEVERAGE OUTLET	N2 INLET	MAXIMUM N2 PRESSURE
NIB 1	3/8 Push-Fit Connection	3/8 Push-Fit Connection	3/8 Push-Fit Connection	50 psi
NIB 2	3/8 Push-Fit Connection	3/8 Push-Fit Connection	3/8 Push-Fit Connection	50 psi
NIB 3	3/8 Push-Fit Connection	3/8 Push-Fit Connection	3/8 Push-Fit Connection	50 psi

Optional Accessories




WC-53118
10 ft. Tubing



WC-2564
Plug, Stem 3/8 Tube

How it works

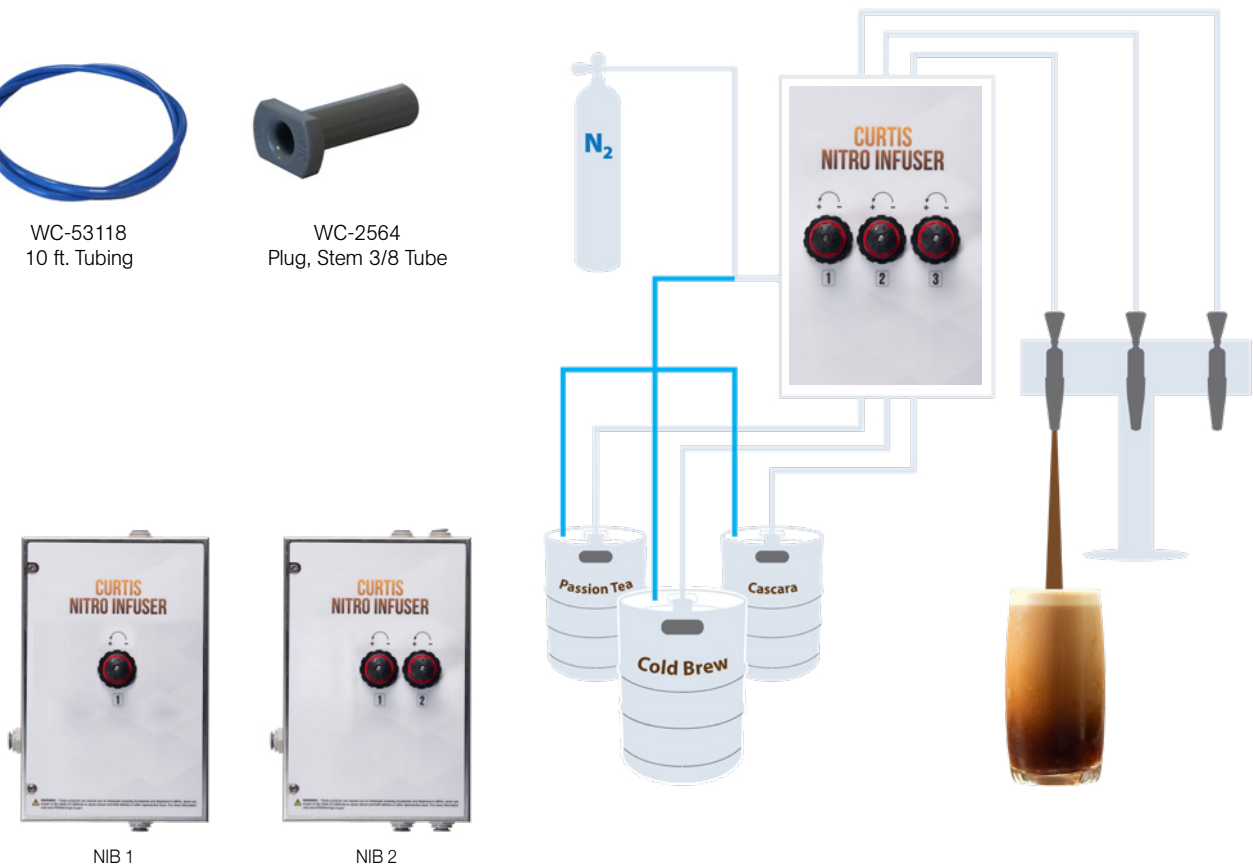

WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

 Dispenser Included

 Dispenser Not Included

 Quick Ship

 New Product

 Special Order

 Cord & Plug Included

 Dual Voltage

Corinth™

Perfect hot water at the touch of a button






COR1W
(Shown with brew kettle - not included)

Features at a Glance

- PID Controlled – Provides precise control of temperature.
- Easy-To-Operate – Simple tactile controls.
- Sleek Minimalist Design – Designed to be an unobtrusive addition to any coffee and tea service location.
- Volumetric Controls – Allows for customizable preset volumes or manual dispense options.

Corinth

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	CUP CLEARANCE	BREWER FILL WEIGHT	BREWED GAL/HR
COR1B/COR1W	Corinth Single Head Dispenserr Under Counter Water Heating System	10.95" x 4.25" x 7.56" 24.52" x 11.07" x 20.52"	7.43"	81 lbs.	4.3/10.0   

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					WATER			
				MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
COR1B/COR1W	1 PH	120/220 V	12.5/22.7 A	15/30A	2 X 2500 W	2W/3W + G	1500/5000 W	50/60 Hz	3/8" flare	20 - 90 psi	2.0 gpm	5.0 gal.



Three programmable buttons provide ultra convenience in hot water dispensing.



COR1B
(Shown with brew kettle - not included)

Corinth.™ The next generation water tower from Curtis.

The Corinth is designed with a minimal footprint on the countertop to allow you to highlight your coffee and tea service.

Featuring an under-counter heating system, Corinth's G3 digital controls accurately maintain set temperature from 170° to 208°F. (Factory pre-set at 208°F)

At the heart of the system, the Corinth includes a unique internal pre-heat exchanger coil to ensure accurate temperature hot water the moment it's dispensed... with no lag time.

Corinth's contemporary tower incorporates three dispense buttons. Each is programmable from continuous manual flow to one-touch 32 oz. dispensing. Corinth comes factory set to 12 oz., 16 oz., and manual free flow. An optional drip tray adapter is available.



WC-65066K
Optional drip tray adapter
for existing equipment
replacement



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

G4 Seraphim® Single Cup Coffee Brewer

Batch Brew Re-Imagined



SERA2W

Features at a Glance

- Standard Seraphim® Package Includes – Two Seraphs (brewheads), One Curtis® 5.0 gallon Hot Water Tower, G4 Touchscreen, and One Drip Tray.
- Brewing Methods – Chemex®, Kalita®, Harlo® V60, Melitta® Dripper, Able® Kone Brewing System, French Press and more.
- Temperature Stability and Flow Rate – Reliable, highly stable temperature and flow rate. Just set it and forget it.
- No Cavitation – Stable Environment Eliminates Low Pressure Pockets.

G4 Seraphim® Single Cup Coffee Brewer

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	CUP CLEARANCE	BREWER FILL WEIGHT	BREWED GAL/HR	
SERA2B	Twin Seraphim® Single Cup Brewer, Black	16.08" x 7.06" x 17.58" - Above Counter 24.49" x 11.07" x 22.25" - Heating Unit	5.63" w/ Brew Basket 11.50" w/o Brew Basket	81 lbs.	4.3/10.0	
SERA2W	Twin Seraphim® Single Cup Brewer, White	16.08" x 7.06" x 17.58" - Above Counter 24.49" x 11.07" x 22.25" - Heating Unit	5.63" w/ Brew Basket 11.50" w/o Brew Basket	81 lbs.	4.3/10.0	

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					WATER			
				MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
SERA2B*	1 PH	120/220V	12.5/22.7A	15/30A	2 x 2500W	2W/3W+G	1500/5000W	50/60 Hz	1/4" Flare	20 - 90 psi	2.0 GPM	5.0 gal.
SERA2W*	1 PH	120/220V	12.5/22.7A	15/30A	2 x 2500W	2W/3W+G	1500/5000W	50/60 Hz	1/4" Flare	20 - 90 psi	2.0 GPM	5.0 gal.

* Brew heads need to be installed within a 2.0' x 3.0' area.



SERA2B
(Shown with WC-73141K Brew Cone Ring Holder)

It is often said that good things come in small packages, and The Seraphim® is no exception. It's no surprise that traditional coffee brewers lack the aesthetic appeal that their counterparts so boldly flaunt on the front counter of every café. Well, we see The Seraphim as the first step of many in the right direction.

Designed to remove barriers between you and your customers, The Seraphim allows you to brew amazing coffee time after time without worry of inconsistencies. With all the bulky, yet necessary, componentry hidden out of sight under the counter the goal of our design is to make your coffee the focal point. We don't want to reinvent the way that coffee is brewed, but we do want to reimagine it. This is Batch Brew Re-Imagined!



Seraphim Water Tower
(Installs conveniently below the counter.)



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

Dispenser Included

Dispenser Not Included

Quick Ship

New Product

Special Order

Cord & Plug Included

Dual Voltage

G4 CGC Single Cup Coffee Brewers

The Golden Cup Standard... One Cup at a Time



CGC

Features at a Glance

- The Brew Basket – Uniform ridges gently hold the filter away from the sides and bottom to allow for optimum extraction. Patent pending, years went into the concept and the development of the brew basket to perfect the brewing process and provide the Golden Cup coffee results.
- Pre-Wet/Wash Filter Function – Many shops pre-wet their filters in an effort to remove any paper taste from interfering with the finished brew. The Curtis® Gold Cup has a pre-wet function that streams hot water over the paper filter to eliminate any undesirable paper taste prior to brewing .
- Gold Cup® Series – Digital Control Module provides precise control over all brewing aspects: time, temperature, volume plus specialty coffee needs from pre-infusion to pulse-brewing to water bypass.
- Siphon Technology – During the brewing process, the brew basket's siphon allows for the water level to rise to the perfect level without exiting. A pre-infusion in its purest form, this patented feature produces the true profile of the intended roast taste and experience.
- New highly-styled hot water faucet provides easy access to an unlimited supply of hot water for teas, soups, instants or other general need.

G4 CGC Single Cup Coffee Brewers

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	CUP CLEARANCE	BREWER FILL WEIGHT	BREWED GAL/HR	
CGC	Gold Cup Single Cup Brewer, Twin	18.19" x 13.28" x 20.98"	6.88"	52.5 lbs.	4.3/5.0	
CGC1	Gold Cup Single Cup Brewer, Single	18.19" x 13.28" x 21.98"	6.88"	48.2 lbs.	4.3/5.0	

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					WATER			
				MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
CGC	1 PH	120/220V	12.5/10.8A	15/15A	2 x 1450W	2W/3W+G	1500/2379W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.7 gal.
CGC1	1 PH	120/220V	12.5/10.8A	15/15A	2 x 1450W	2W/3W+G	1500/2379W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.7 gal.

- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 95
- Water filtration solutions for these brewers can be found on page 98



CGC1
(Shown with single cup WC-3411-102 brew basket)



CGC1
(Shown with 64 oz. WC-3621-101 brew basket)



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

Dispenser Included

Dispenser Not Included

Quick Ship

New Product

Special Order

Cord & Plug Included

Dual Voltage

G4 GEMX™

Gemini® IntelliFresh® 1.5 Gallon Brewers with FreshTrac® Satellites









G4GEMXTIFT10A1000

Features at a Glance

- LED notification of freshness timing.
- Gold Cup Series™ – digital control module provides precise control over all aspects of brewing: time, temperature, volume plus specialty coffee needs from pre-infusion to pulse-brewing to water bypass.
- Preset, one-touch Global Recipes – Based on coffee type, grind and weight. Simplifies profile setting for gourmet results every time.
- Industry's most effective mineral tolerant design.
- Patented fast-wetting AFS spray head and non-immersed water temperature sensor.
- Encapsulated control board – Protects against steam, water and impact.
- Field selectable for 0.5, 1.0 or 1.5 gal. batch brewing.
- New highly-styled hot water faucet provides easy access to an unlimited supply of hot water for teas, soups, instants or other general need.

GEMX™

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR	
G4GEMXSIFT63A1000	Single, 1.5 Gallon with IntelliFresh, FreshTrac	31.87" x 10.50" x 22.68"	68.4 lbs.	4.5/10.0	   
G4GEMXTIFT10A1000	Twin, 1.5 Gallon with IntelliFresh, FreshTrac	31.87" x 18.17" x 22.68"	128.4 lbs.	15.0/21.0	 

Utility Requirements

MODEL #	PHASE	VOLTS	ELECTRICAL					WATER			
			AMPS	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
G4GEMXSIFT63A1000	1 PH	120/220 V	13.5/13.5 A	2 X 1600 W	2W/3W + G	1650/2800 W	50/60 Hz	3/8" flare	20 - 90 psi	1.0 gpm	2.2 gal.
G4GEMXTIFT10A1000	1 PH	220 V	23.0/34.0 A	3 X 2500 W	3W + G	5100/7500 W	50/60 Hz	3/8" flare	20 - 90 psi	2.0 gpm	5.2 gal.

Dispenser & Warmer Stand Reference Guide

MODEL #	GEM3XIFT	GEM5XSIFT	GEM5XTIFT
G4GEMXSIFT63A1000	✓	✓	✓
G4GEMXTIFT10A1000	✓	✓	✓

More than a coffee brewer. A true thinking machine.

GEMX

Sitting atop a proud lineage stretching back to 1980 and the introduction of their famed Gemini® Satellite Brewing System, the GemX brewer features Curtis's evolutionary IntelliFresh® and FreshTrac® technologies that ensures coffee temperature and streamlines labor by letting you track coffee freshness from across the room.

With its large 4.3-inch touchscreen and icon-driven interface that streamlines and simplifies operation, G4 GemX provides intuitive onscreen instructions for fast, streamlined training and real-time feedback on the brewing process. The unit also includes a USB port that lets operators easily transfer recipes from store to store.



G4GEMXSIFT63A1000



GEM3XIFT



GEM5XSIFT



GEM5XTIFT

- For a complete dispenser reference guide see pages 74-75
- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 91
- Water filtration solutions for these brewers can be found on page 98



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

G4 Gemini® 1.5 Gallon Brewers

Touchscreen Streamlines Operation









G4GEMT10A1000

Features at a Glance

- Generation Four (G4) Digital Control Module – Large, 4.3" touch screen. Icon-driven interface streamlines operation.
- On-Screen Instructions – Provides fast, intuitive training; reduces service calls.
- Built-In Self Diagnostic System – Includes real-time feedback of the brewing process and energy saving mode.
- Gold Cup® Series – Digital Control Module provides precise control over all aspects of brewing: time, temperature, volume and specialty coffee needs from pre-infusion to pulse-brewing to water bypass.
- New highly-styled hot water faucet provides easy access to an unlimited supply of hot water for teas, soups, instants or other general need.

G4 Gemini® 1.5 Gallon Brewers

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR	
G4GEMS63A1000	G4 Gemini Single 1.5 gal.	29.81" x 9.11" x 22.11"	68.4 lbs.	4.5/7.5	   
G4GEMT10A1000	G4 Gemini Twin 1.5 gal.	30.00" x 18.11" x 22.06"	124.4 lbs.	15.0/21.0	 

Utility Requirements

MODEL #	PHASE	ELECTRICAL						WATER			
		VOLTS	AMPS	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
G4GEMS63A1000	1 PH	120/220V	15.0/12.7A	2 x 1600W	2W/3W+G	1800/3300W	50/60 Hz	3/8" Flare	20 - 90 psi	1.0 GPM	2.2 Gal.
G4GEMT10A1000	1 PH	220V	23.6/34.5A	3 x 2500W	3W+G	5200/7600W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	5.2 Gal.

Dispenser & Warmer Stand Reference Guide

MODEL #	GEM-3/D	GEM-5	GEM-3-5
G4GEMS63A1000	✓	✓	✓
G4GEMT10A1000	✓	✓	✓

- For a complete dispenser reference guide see pages 74-75
- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 91
- Water filtration solutions for these brewers can be found on page 98



G4GEMS63A1000



GEM-3



GEM-5



GEM-3-5



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

G3 GEMX™

Gemini® IntelliFresh® 1.5 Gallon Brewers with FreshTrac® Satellites









GEMXTIFT10A1000

Features at a Glance

- LED notification of freshness timing.
- Gold Cup Series™ – digital control module provides precise control over all aspects of brewing: time, temperature, volume plus specialty coffee needs from pre-infusion to pulse-brewing to water bypass.
- Preset, one-touch Global Recipes – Based on coffee type, grind and weight. Simplifies profile setting for gourmet results every time.
- Industry's most effective mineral tolerant design.
- Patented fast-wetting AFS spray head and non-immersed water temperature sensor.
- Encapsulated control board – Protects against steam, water and impact.
- Field selectable for 0.5, 1.0 or 1.5 gal. batch brewing.
- New highly-styled hot water faucet provides easy access to an unlimited supply of hot water for teas, soups, instants or other general need.

GEMX™

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR	
GEMXSIFT63A1000	Single, 1.5 Gallon with IntelliFresh, FreshTrac	31.87" x 10.50" x 22.68"	68.4 lbs.	4.5/10.0	   
GEMXTIFT10A1000	Twin, 1.5 Gallon with IntelliFresh, FreshTrac	31.87" x 18.17" x 22.68"	128.4 lbs.	15.0/21.0	 

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	HEAT CONFIG	WIRE	WATTS	HERTZ	WATER			
								CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
GEMXSIFT63A1000	1 PH	120/220 V	13.5/13.5 A	2 X 1600 W	2W/3W + G	1650/2800 W	50/60 Hz	3/8" flare	20 - 90 psi	1.0 gpm	2.2 gal.
GEMXTIFT10A1000	1 PH	220 V	23.0/34.0 A	3 X 2500 W	3W + G	5100/7500 W	50/60 Hz	3/8" flare	20 - 90 psi	2.0 gpm	5.2 gal.

Dispenser & Warmer Stand Reference Guide

MODEL #	GEM3XIFT	GEM5XSIFT	GEM5XTIFT
GEMXSIFT63A1000	✓	✓	✓
GEMXTIFT10A1000	✓	✓	✓

GEMX

More than a coffee brewer. A true thinking machine.

Equipped with Curtis's evolutionary IntelliFresh® and FreshTrac® technologies, the GemX system ensures coffee temperature and streamlines labor by letting you track coffee freshness from across the room. No guesswork. No distracting alarms... you'll know immediately when a new brew is needed. Resulting in an exceptional customer experience with fresh, great-tasting coffee all day long.

G3 GemX features a Universal Control Module with an easy to read, true-green LED display and simple interface. It provides precise, digital fine-tuning of the brewing process and complete control over pre-infusion, pulse-brewing, water bypass and more. Pre-set, one touch global recipes simplify profile setting for gourmet results every time.

- For a complete dispenser reference guide see pages 74-75
- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 91
- Water filtration solutions for these brewers can be found on page 98



GEMXSIFT63A1000



GEM3XIFT



GEM5XSIFT



GEM5XTIFT



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

G3 Gemini® 1.5 Gallon Brewers

Precision Control Over All Brewing Aspects















GEMTS10A1000

Features at a Glance

- G3 Digital Control Module – Provides gourmet coffee control with Pre-Infusion, Pulse-Brewing, Water Bypass and more. No manual adjustments needed.
- Pre-Set, One-Touch Global Recipes – Based on coffee type, grind and weight to simplify profile settings for gourmet results every time. Standard Recipes include: Gourmet Standard, Dark Roast, Light Roast, High Yield, Filter Pack and Decaf.
- Double-wall construction in each satellite server helps maintain coffee temperature with minimal heat loss.
- Enhanced Recovery Circuitry – Boosts performance on 220V/single phase models.
- Field selectable for one, two or three batch brewing.
- New highly-styled hot water faucet provides easy access to an unlimited supply of hot water for teas, soups, instants or other general need.

G3 Gemini® 1.5 Gallon Brewers

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR	
GEMSS10A1000	G3 Gemini® Single 1.5 gal.	29.88" x 9.13" x 22.25"	68.4 lbs.	12.0	 
GEMSS63A1000	G3 Gemini® Single 1.5 gal.	29.88" x 9.13" x 22.25"	68.4 lbs.	4.5/10.0	   
GEMTS10A1000	G3 Gemini® Twin 1.5 gal.	29.75" x 18.13" x 22.25"	124.4 lbs.	15.0/21.0	 
GEMTS16A1000	G3 Gemini® Twin 1.5 gal. with transformer	29.75" x 18.13" x 25.63"	124.4 lbs.	21.0	 
GEMTS19A1000	G3 Gemini® Twin 1.5 gal.	29.75" x 18.13" x 22.25"	136.4 lbs.	21.0	 

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					WATER			
				MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
GEMSS10A1000	1 PH	220V	19.5A	30A	2 x 2000W	3W+G	4300W	50/60 Hz	3/8" Flare	20 - 90 psi	1.0 GPM	2.2 gal.
GEMSS63A1000	1 PH	120/220V	15.0/12.7A	15/20A	2 x 1600W	2W/3W+G	1800/3300W	50/60 Hz	3/8" Flare	20 - 90 psi	1.0 GPM	2.2 gal.
GEMTS10A1000	1 PH	220V	23.6/34.5A	30/50A	3 x 2500W	3W+G	5200/7600W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	5.2 gal.
GEMTS16A1000	3 PH	220V	20.0A	30A	3 x 2500W	3W+G	7600W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	5.2 gal.
GEMTS19A1000	3 PH	220V	20.0A	30A	3 x 2500W	4W+G	7600W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	5.2 gal.

Dispenser & Warmer Stand Reference Guide

MODEL #	GEM-3/D	GEM-5
GEMSS10A1000	✓	✓
GEMSS63A1000	✓	✓
GEMTS10A1000	✓	✓
GEMTS16A1000	✓	✓
GEMTS19A1000	✓	✓

- For a complete dispenser reference guide see pages 74-75
- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 91
- Water filtration solutions for these brewers can be found on page 98



GEMSS10A1000



GEMTS19A1000



GEM-3



GEM-5



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

Gemini® 1.0 & 1.5 Gallon Brewers

Maintains Rich, Full-Bodied Flavor



GEM-12D-10

Features at a Glance

- Brews automatically in 12 or 24 cup increments per cycle.
- Automatic timer allows brewing of 24 cups without brew basket reloading.
- Hot water faucet lets you draw steaming hot water for tea or soups — even during brewing.
- High-efficiency, double-wall insulation in each satellite server maintains coffee temperature for extended periods without warming. Coffee cannot deteriorate, but maintains its rich, full-bodied flavor.
- Locking satellite lids guard against accidental spills.
- Color-coded satellite faucets available for regular or decaffeinated coffee.

Gemini® 1.0 & 1.5 Gallon Brewers

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR	
GEM-120A-10	Analog, 1.0 gal. Single	27.08" x 9.11" x 22.18"	61.4 lbs.	4.5	
GEM-120A-63	Analog, 1.0 gal. Single	30.60" x 9.11" x 22.18"	59.4 lbs.	4.5/6.0	
GEM-12D-10	ADS Digital, 1.5 gal. Twin	29.00" x 18.00" x 16.50"	122.4 lbs.	17.5	

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					WATER			
				MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
GEM-120A-10	1 PH	120V	15.0A	15A	1 x 1600W	2W+G	1775W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	2.2 gal.
GEM-120A-63	1 PH	120/220V	15.0/10.0A	15A	1 x 1600/ 1 x 2000W	2W/3W+G	1775/2100W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	2.2 gal.
GEM-12D-10	1 PH	220V	29.0A	40A	3 x 2000W	3W+G	6300W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	5.2 gal.

Dispenser & Warmer Stand Reference Guide

MODEL #	GEM-3/D	GEM-5
GEM-120A-10	✓	✓
GEM-120A-63	✓	✓
GEM-12D-10	✓	✓

- For a complete dispenser reference guide see pages 74-75
- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 91
- Water filtration solutions for these brewers can be found on page 98



GEM-120A-10



GEM-3



GEM-5



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

G4 ThermoProX[®] 1.5 Gallon Brewers

Gourmet Results Every Time



G4TPX2T10A3100

Features at a Glance

- Generation Four (G4) Digital Control Module – Large, 4.3" touch screen. Icon-driven interface streamlines operation.
- Built-In Self Diagnostic System – Includes real-time feedback of the brewing process and energy saving mode.
- Gold Cup® Series – Digital Control Module provides precise control over all aspects of brewing: time, temperature, volume plus specialty coffee needs from pre-infusion, pulse-brewing, and water bypass.
- Pre-Set, One-Touch Global Recipes – Based on coffee type, grind and weight.
- Single unit is field selectable for one, two or three batch brewing.
- Centrally located hot water spout for instant hot beverages and other hot water needs.

G4 ThermoPro® 1.5 Gallon Brewers

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR	
G4TPX2S63A3100	G4 ThermoProX® Single 1.5 gal.	36.48" x 11.00" x 19.72"	77.2 lbs.	4.5/12.0	
G4TPX2T10A3100	G4 ThermoProX® Twin 1.5 gal.	36.44" x 20.00" x 20.62"	132.6 lbs.	15.0/21.0	

Utility Requirements

MODEL #	PHASE	VOLTS	ELECTRICAL					WATER			
			AMPS	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
G4TPX2S63A3100	1 PH	120/220V	15.0/12.7A	2 x 1600W	2W/3W+G	1800/2800W	50/60 Hz	3/8" Flare	20 - 90 psi	1.0 GPM	2.9 gal.
G4TPX2T10A3100	1 PH	220V	23.0/34.5A	3 x 2500W	3W+G	5100/7600W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	6.9 gal.

Dispenser Reference Guide

MODEL #	TXSG1501S600	TFT15G/TFTR15G/TFT15G3
G4TPX2S63A3100	✓	✓
G4TPX2T10A3100	✓	✓

- For a complete dispenser reference guide see pages 76-77
- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 92
- Water filtration solutions for these brewers can be found on page 98



G4TP15S10A1500



TXSG1501S600



TFT15G/TFTR15G/TFT15G3



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

G4 ThermoProX[®] 1 Gallon Brewers

Gourmet Results Every Time



G4TPX1T10A3100

Features at a Glance

- Generation Four (G4) Digital Control Module – Large, 4.3" touch screen. Icon-driven interface streamlines operation.
- Built-In Self Diagnostic System – Includes real-time feedback of the brewing process and energy saving mode.
- Gold Cup® Series – Digital Control Module provides precise control over all aspects of brewing: time, temperature, volume plus specialty coffee needs from pre-infusion, pulse-brewing, and water bypass.
- Pre-Set, One-Touch Global Recipes – Based on coffee type, grind and weight.
- Single unit is field selectable for one, two or three batch brewing.
- Centrally located hot water spout for instant hot beverages and other hot water needs.

G4 ThermoPro® 1 Gallon Brewers

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR	
G4TPX1S63A3100	G4 ThermoProX® Single 1 gal.	26.02" x 11.00" x 19.72"	59.4 lbs.	4.5/10.0	
G4TPX1T10A3100	G4 ThermoProX® Twin 1 gal.	26.02" x 20.00" x 20.62"	118.4 lbs.	15.0/21.0	

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL				WATER			
				HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
G4TPX1S63A3100	1 PH	120/220V	13.8/12.2A	2 x 1600W	2W/3W+G	1800/2800W	50/60 Hz	3/8" Flare	20 - 90 psi	1.0 GPM	2.2 gal.
G4TPX1T10A3100	1 PH	220V	23.0/34.5A	3 x 2500W	3W+G	5100/7600W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	6.9 gal.

Dispenser Reference Guide

MODEL #	TXSG0101S600	TFT1G/TFTR1G/TFT1G2
G4TPX1S63A3100	✓	✓
G4TPX1T10A3100	✓	✓

- For a complete dispenser reference guide see pages 76-77
- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 92
- Water filtration solutions for these brewers can be found on page 98



G4TP15S10A1500



TXSG0101S600



TFT1G



TFT1G2

WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

G3 ThermoProX[®] 1.5 Gallon Brewers

Gourmet Results Every Time



TPX2T10A3100

Features at a Glance

- G3 Digital Control Module provides precise control over all aspects of brewing in an intuitive, easy-to-operate system.
- Pre-Set Global Recipes at the touch of a single button - No complex equipment required.
- Stainless-steel ThermoPro vacuum-sealed servers keep coffee fresh, hot and flavorful.
- Centrally located hot water spout for instant hot beverages and other hot water needs.

G3 ThermoPro® 1.5 Gallon Brewers

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR	
TPX2T10A3100	ThermoProX® Single 1.5 gal.	36.48" x 11.00" x 19.72"	77.2 lbs.	4.5/12.0	
TPX2S63A3100	ThermoProX® Twin 1.5 gal.	36.44" x 20.00" x 20.62"	132.6 lbs.	15.0/21.0	

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	HEAT CONFIG	WIRE	WATTS	HERTZ	WATER			
								CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
TPX2T10A3100	1 PH	120/220V	15.0/12.7A	2 x 1600W	2W/3W+G	1800/2800W	50/60 Hz	3/8" Flare	20 - 90 psi	1.0 GPM	2.9 gal.
TPX2S63A3100	1 PH	220V	23.0/34.5A	3 x 2500W	3W+G	5100/7600W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	6.9 gal.

Dispenser Reference Guide

MODEL #	TXSG1501S600	TFT15G/TFTR15G/TFT15G2
TPX2T10A3100	✓	✓
TPX2S63A3100	✓	✓

- For a complete dispenser reference guide see pages 76-77
- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 92
- Water filtration solutions for these brewers can be found on page 98



TPX2S63A3100



TXSG1501S600



TFT15G



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

G4 ThermoPro® 1.5 Gallon Brewers

Gourmet Results Every Time












G4TP15T10A1100

Features at a Glance

- Generation Four (G4) Digital Control Module – Large, 4.3” touch screen. Icon-driven interface streamlines operation.
- Stainless steel ThermoPro® vacuum-sealed servers keep coffee fresh, hot and flavorful.
- Built-In Self Diagnostic System – Includes real-time feedback of the brewing process and energy saving mode.
- Gold Cup® Series – Digital Control Module provides precise control over all aspects of brewing: time, temperature, volume plus specialty coffee needs from pre-infusion, pulse-brewing, and water bypass.
- Pre-Set, One-Touch Global Recipes – Based on coffee type, grind and weight.
- Single unit is field selectable for one, two or three batch brewing.
- Centrally located hot water spout for instant hot beverages and other hot water needs.

G4 ThermoPro® 1.5 Gallon Brewers

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR
G4TP15S10A1500	G4 ThermoPro® Single 1.5 gal. with shelf	35.14" x 11.07" x 20.75"	77.2 lbs.	12.0 
G4TP15S63A1500	G4 ThermoPro® Single 1.5 gal. with shelf, Dual Voltage	35.14" x 11.07" x 20.75"	77.2 lbs.	4.5/10.0  
G4TP2S63A3100	G4 ThermoPro® Single 1.5 gal. Dual Voltage	35.14" x 11.07" x 20.75"	77.2 lbs.	4.5/10.0   
G4TP15T10A1500	G4 ThermoPro® Twin 1.5 gal. with shelf	35.42" x 20.07" x 20.75"	132.6 lbs.	15.0/21.0 
G4TP2T10A3100	G4 ThermoPro® Twin 1.5 gal.	35.42" x 20.07" x 20.75"	132.6 lbs.	15.0/21.0  
G4TP2T10A3500	G4 ThermoPro® Twin 1.5 gal. with shelf	35.42" x 20.07" x 20.75"	132.6 lbs.	15.0/21.0 

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					WATER			
				MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
G4TP15S10A1500	1 PH	220V	19.5A	30A	2 x 2000W	3W+G	4300W	50/60 Hz	3/8" Flare	20 - 90 psi	1.0 GPM	2.9 gal.
G4TP15S63A1500	1 PH	120/220V	15.0/12.7A	15/20A	2 x 1600W	2W/3W+G	1800/2800W	50/60 Hz	3/8" Flare	20 - 90 psi	1.0 GPM	2.9 gal.
G4TP2S63A3100	1 PH	120/220V	15.0/12.7A	15/20A	2 x 1600W	2W/3W + G	1800/2800W	50/60 Hz	3/8" Flare	20 - 90 psi	1.0 GPM	2.9 gal.
G4TP15T10A1500	1 PH	220V	23.0/34.5A	30/50A	3 x 2500W	3W+G	5100/7600W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	6.9 gal.
G4TP2T10A3100	1 PH	220V	23.0/34.5A	30/50A	3 x 2500W	3W+G	5100/7600W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	6.9 gal.
G4TP2T10A3500	1 PH	220V	23.0/34.5A	30/50A	3 x 2500W	3W+G	5100/7600W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	6.9 gal.

Dispenser Reference Guide

MODEL #	TXSG1501S600	TFT15G/TFTR15G/TFT15G3	TLXA2201G000
G4TP15S10A1500	✓	✓	✓
G4TP15S63A1500	✓	✓	✓
G4TP2S63A3100	✓	✓	
G4TP15T10A1500	✓	✓	✓
G4TP2T10A3100	✓	✓	
G4TP2T10A3500	✓	✓	✓

- For a complete dispenser reference guide see pages 76-77
- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 92
- Water filtration solutions for these brewers can be found on page 98



G4TP15S10A1500



G4TP15T10A1500



G4TP2S63A3100



TXSG1501S600



TFT15G/TFTR15G/TFT15G3



TLXA2201G000



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

G4 ThermoPro® 1.0 Gallon Brewers

One Gallon Gourmet



G4TP1T10A3100



Features at a Glance

- Generation Four (G4) Digital Control Module – Large, 4.3” touch screen. Icon-driven interface streamlines operation.
- Stainless steel ThermoPro® vacuum-sealed servers keep coffee fresh, hot and flavorful.
- Built-In Self Diagnostic System – Includes real-time feedback of the brewing process and energy saving mode.
- Gold Cup® Series – Digital Control Module provides precise control over all aspects of brewing: time, temperature, volume plus specialty coffee needs from pre-infusion, pulse-brewing, and water bypass.
- Pre-Set, One-Touch Global Recipes – Based on coffee type, grind and weight.
- Single unit is field selectable for one, two or three batch brewing.
- Centrally located hot water spout for instant hot beverages and other hot water needs.

G4 ThermoPro® 1.0 Gallon Brewers

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR	
G4TP1S63A3100	G4 ThermoPro® Single 1.0 gal.	24.75" x 11.13" x 20.75"	59.4 lbs.	4.5/10.0	
G4TP1S63W3100	G4 ThermoPro® Single 1.0 gal., Sky White	24.75" x 11.13" x 20.75"	59.4 lbs.	4.5/10.0	
G4TP1S63B3100	G4 ThermoPro® Single 1.0 gal., Black	24.75" x 11.13" x 20.75"	59.4 lbs.	4.5/10.0	
G4TP1T10A3100	G4 ThermoPro® Twin 1.0 gal.	24.75" x 20.13" x 20.75"	118.4 lbs.	15.0/21.0	
G4TP1T10W3100	G4 ThermoPro® Twin 1.0 gal., Sky White	24.75" x 20.13" x 20.75"	118.4 lbs.	15.0/21.0	
G4TP1T10B3100	G4 ThermoPro® Twin 1.0 gal., Black	24.75" x 20.13" x 20.75"	118.4 lbs.	15.0/21.0	

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					WATER			
				MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
G4TP1S63A3100	1 PH	120/220V	13.8/12.2A	15/20A	2 x 1600W	2W/3W+G	1650/2700W	50/60 Hz	3/8" Flare	20 - 90 psi	1.0 GPM	2.2 gal.
G4TP1S63W3100	1 PH	120/220V	13.8/12.2A	15/20A	2 x 1600W	2W/3W+G	1650/2700W	50/60 Hz	3/8" Flare	20 - 90 psi	1.0 GPM	2.2 gal.
G4TP1S63B3100	1 PH	120/220V	13.8/12.2A	15/20A	2 x 1600W	2W/3W+G	1650/2700W	50/60 Hz	3/8" Flare	20 - 90 psi	1.0 GPM	2.2 gal.
G4TP1T10A3100	1 PH	220V	23.0/34.5A	30/50A	3 x 2500W	3W+G	5100/7600W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	5.2 gal.
G4TP1T10W3100	1 PH	220V	23.0/34.5A	30/50A	3 x 2500W	3W+G	5100/7600W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	5.2 gal.
G4TP1T10B3100	1 PH	220V	23.0/34.5A	30/50A	3 x 2500W	3W+G	5100/7600W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	5.2 gal.

Dispenser Reference Guide

MODEL #	TXSG0101S600	TFT1G/TFTR1G	TFT1G2	TFT1G3
G4TP1S63A3100	✓	✓	✓	✓
G4TP1S63W3100	✓	✓	✓	✓
G4TP1S63B3100	✓	✓	✓	✓
G4TP1T10A3100	✓	✓	✓	✓
G4TP1T10W3100	✓	✓	✓	✓
G4TP1T10B3100	✓	✓	✓	✓

- For a complete dispenser reference guide see pages 76-77
- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 92
- Water filtration solutions for these brewers can be found on page 98



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

G3 ThermoPro® 1.5 Gallon Brewers

Delicious Aromatic Gourmet Coffee



TP15T10A1100

Features at a Glance

- G3 Digital control module provides precise control over all aspects of brewing in an intuitive, easy-to-operate system.
- Pre-Set Global Recipes at the Touch of a Single Button
 - No complex equipment required.
- Stainless-steel ThermoPro® vacuum-sealed servers keep coffee fresh, hot and flavorful.
- Centrally located hot water spout for instant hot beverages and other hot water needs.

G3 ThermoPro® 1.5 Gallon Brewers

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR	
TP15S10A1100	G3 ThermoPro® Single 1.5 gal.	35.13" x 11.13" x 20.75"	77.2 lbs.	12.0	
TP15S63A1100	G3 ThermoPro® Single 1.5 gal. Dual Voltage	35.13" x 11.13" x 20.75"	77.2 lbs.	4.5/10.0	
TP15S10A1500	G3 ThermoPro® Single 1.5 gal. with shelf	35.13" x 11.13" x 20.75"	77.2 lbs.	12.0	
TP15S63A1500	G3 ThermoPro® Single 1.5 gal. with shelf, Dual Voltage	35.13" x 11.13" x 20.75"	77.2 lbs.	4.5/10.0	
TP15T10A1100	G3 ThermoPro® Twin 1.5 gal.	35.13" x 20.13" x 20.75"	125.6 lbs.	15.0/21.0	
TP15T10A1159	G3 ThermoPro® Twin 1.5 gal. with Hi-Capacity Brew Basket	35.13" x 20.13" x 20.75"	125.6 lbs.	15.0/21.0	
TP15T16A1100	G3 ThermoPro® Twin 1.5 gal. with Transformer	35.13" x 20.13" x 24.13"	125.6 lbs.	21.0	
TP15T19A1100	G3 ThermoPro® Twin 1.5 gal.	35.13" x 20.13" x 20.75"	125.6 lbs.	21.0	
TP15T10A1500	G3 ThermoPro® Twin 1.5 gal. with shelf	35.13" x 20.13" x 20.75"	125.6 lbs.	15.0/21.0	
TP15S10A5100	G3 ThermoPro® Single 1.5 gal. with TFT dispenser	35.13" x 11.13" x 20.75"	77.2 lbs.	12.0	
TP15T10A5100	G3 ThermoPro® Twin 1.5 gal. with TFT dispensers	35.13" x 20.13" x 20.75"	125.6 lbs.	15.0/21.0	

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					WATER			
				MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
TP15S10A1100	1 PH	220V	19.5A	30A	2 x 2000W	3W+G	4300W	50/60 Hz	3/8" Flare	20 - 90 psi	1.0 GPM	2.9 gal.
TP15S63A1100	1 PH	120/220V	15.0/12.7A	15/20A	2 x 1600W	2W/3W+G	1800/2800W	50/60 Hz	3/8" Flare	20 - 90 psi	1.0 GPM	2.9 gal.
TP15S10A1500	1 PH	220V	19.5A	30A	2 x 2000W	3W+G	4300W	50/60 Hz	3/8" Flare	20 - 90 psi	1.0 GPM	2.9 gal.
TP15S63A1500	1 PH	120/220V	15.0/12.7A	15/20A	2 x 1600W	2W/3W+G	1800/2800W	50/60 Hz	3/8" Flare	20 - 90 psi	1.0 GPM	2.9 gal.
TP15T10A1100	1 PH	220V	23.0/34.5A	30/50A	3 x 2500W	3W+G	5100/7600W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	6.9 gal.
TP15T10A1159	1 PH	220V	23.0/34.5A	30/50A	3 x 2500W	3W+G	5100/7600W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	6.9 gal.
TP15T16A1100	3 PH	220V	20.0A	30A	3 x 2500W	3W+G	7600W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	6.9 gal.
TP15T19A1100	3 PH	220V	20.0A	30A	3 x 2500W	4W+G	7600W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	6.9 gal.
TP15T10A1500	1 PH	220V	23.0/34.5A	30/50A	3 x 2500W	3W+G	5100/7600W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	6.9 gal.
TP15S10A5100	1 PH	220V	19.5A	30A	2 x 2000W	3W+G	4300W	50/60 Hz	3/8" Flare	20 - 90 psi	1.0 GPM	2.9 gal.
TP15T10A5100	1 PH	220V	23.0/34.5A	30/50A	3 x 2500W	3W+G	5100/7600W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	6.9 gal.

Dispenser Reference Guide

MODEL #	TXSG1501S600	TXSG101S600	TFT15G/TFTR15G	TFT15G3	TLXA2201G000
TP15S10A1100	✓	✓	✓	✓	
TP15S63A1100	✓	✓	✓	✓	
TP15S10A1500	✓	✓	✓	✓	✓
TP15S63A1500	✓	✓	✓	✓	✓
TP15T10A1100	✓	✓	✓	✓	
TP15T10A1159	✓	✓	✓	✓	
TP15T16A1100	✓	✓	✓	✓	
TP15T19A1100	✓	✓	✓	✓	
TP15T10A1500	✓	✓	✓	✓	✓
TP15S10A5100	✓	✓	✓	✓	
TP15T10A5100	✓	✓	✓	✓	

- For a complete dispenser reference guide see pages 76-77
- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 92
- Water filtration solutions for these brewers can be found on page 98



TP15S10A1500



TP15T10A1159



TXSG1501S600



TFT15G/TFTR15G



TFT15G3



TLXA2201G000



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

G3 ThermoPro® 1.0 Gallon Brewers

One Gallon Gourmet Brewing














TP1TT10A3000

Features at a Glance

- G3 Digital control module provides precise control over all aspects of brewing in an intuitive, easy-to-operate system.
- Pre-Set Global Recipes at the Touch of a Single Button – No complex equipment required.
- Stainless-steel ThermoPro® vacuum-sealed servers keep coffee fresh, hot and flavorful.
- Field selectable for one, two or three batch brewing.
- New highly-styled hot water faucet provides easy access to an unlimited supply of hot water for teas, soups, instants or other general need.

G3 ThermoPro® 1.0 Gallon Brewers

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR	
TP1S63A1000	G3 ThermoPro® Single 1.0 gal.	27.92" x 9.32" x 20.29"	80.0 lbs.	4.5/12.0	  
TP1ST63A3000	G3 ThermoPro® Single Tall 1.0 gal.	36.67" x 9.32" x 20.29"	80.0 lbs.	4.5/12.0	  
TP1T10A1000	G3 ThermoPro® Twin 1.0 gal.	28.17" x 18.30" x 20.57"	103.4 lbs.	15.0/21.0	  
TP1T19A1000	G3 ThermoPro® Twin 1.0 gal.	28.17" x 18.30" x 20.57"	111.4 lbs.	21.0	
TP1TT10A3000	G3 ThermoPro® Twin Tall 1.0 gal.	36.67" x 18.30" x 20.57"	111.4 lbs.	15.0/21.0	

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					WATER			
				HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.	
TP1S63A1000	1 PH	120/220V	13.7/12.3A	2 x 1600W	2W/3W+G	1650/2700W	50/60 Hz	3/8" Flare	20 - 90 psi	1.0 GPM	3.0 gal.	
TP1ST63A3000	1 PH	120/220V	13.7/12.3A	2 x 1600W	2W/3W+G	1650/2700W	50/60 Hz	3/8" Flare	20 - 90 psi	1.0 GPM	3.0 gal.	
TP1T10A1000	1 PH	220V	23.0/34.5A	3 x 2500W	3W+G	5100/7600W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	5.2 gal.	
TP1T19A1000	3 PH	220V	20.0A	3 x 2500W	4W+G	7600W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	5.2 gal.	
TP1TT10A3000	1 PH	220V	23.0/34.5A	3 x 2500W	3W+G	5100/7600W	50/60 Hz	3/8" Flare	20 - 90 psi	2.0 GPM	5.5 gal.	

Dispenser Reference Guide

MODEL #	TXSG01015600	TFT1G/TFTR1G	TFT1G2	TFT1G3
TP1S63A1000			✓	
TP1ST63A3000	✓	✓	✓	✓
TP1T10A1000			✓	
TP1T19A1000			✓	
TP1TT10A3000	✓	✓	✓	✓

- For a complete dispenser reference guide see pages 76-77
- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 93
- Water filtration solutions for these brewers can be found on page 98



TP1S63A1000



TP1T10A1000



TXSG01015600



TFT1G/TFTR1G



TFT1G3



TFT1G2



WC-56020
base assembly



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov



Dispenser Included



Dispenser Not Included



Quick Ship



New Product



Special Order



Cord & Plug Included



Dual Voltage

G3 Airpot Brewers

Versatile and Simple to Use



D500GT12A000

Features at a Glance

- Precise Gourmet Control Over All Critical Functions – The G3 Digital Control Module provides you the expertise to brew premium gourmet coffee with ease.
- Built-In Fine Tuning Brewing Modes – Pre-infusion or pulse-brew enhances extraction of gourmet coffee flavor. Cold water brew lock-out prevents brewing when water temperature is below set level.
- The Digital Control Module is encapsulated in high-tech polymer and is impervious to heat, steam and moisture.
- Intuitive Scroll-Through Precision Programming – Large, brightly lighted display communicates functions at a glance. Easily adjust time, volume, temperature, brew functions and more.
- Two head brewers are easily programmed independently of each other.
- New highly-styled hot water faucet provides easy access to an unlimited supply of hot water for teas, soups, instants or other general need.

G3 Airpot Brewers

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR	
D500GT12A000	G3 Airpot Single 2.2L - 2.5L Brewer	24.48" x 9.25" x 20.38"	47.5 lbs.	4.0	
D500GT63A000	G3 Airpot Single 2.2L - 2.5L Brewer	24.48" x 9.25" x 20.38"	47.5 lbs.	4.0/7.0	
D500GTH12A000	G3 Airpot Single Tall 2.2L - 2.5L Brewer	27.75" x 9.25" x 20.38"	47.5 lbs.	4.0	
D500GTH63A000	G3 Airpot Single Tall 2.2L - 2.5L Brewer	27.75" x 9.25" x 20.38"	47.5 lbs.	4.0/7.0	
D1000GT12A000	G3 Airpot Twin 2.2L - 2.5L Brewer	26.00" x 18.13" x 20.00"	85.0 lbs.	14.0	
D1000GT63A000	G3 Airpot Twin 2.2L - 2.5L Brewer	26.00" x 18.13" x 20.00"	85.0 lbs.	5.0/8.0	
D1000GH13A000	G3 Airpot Twin Tall 2.2L - 2.5L Brewer, Gourmet Brew Basket	29.25" x 18.13" x 20.00"	85.0 lbs.	14.0	
D1000GH62A000	G3 Airpot Twin Tall 2.2L - 2.5L Brewer, Gourmet Brew Basket	29.25" x 18.13" x 20.00"	85.0 lbs.	5.0/8.0	

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					WATER			
				MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
D500GT12A000	1 PH	120V	14.0A	15A	1 x 1600W	2W+G	1675W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
D500GT63A000	1 PH	120/220V	13.5/12.0A	15/15A	2 x 1600W	2W/3W+G	1600/2700W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
D500GTH12A000	1 PH	120V	14.0A	15A	1 x 1600W	2W+G	1675W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
D500GTH63A000	1 PH	120/220V	13.5/12.0A	15/15A	2 x 1600W	2W/3W+G	1600/2700W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
D1000GT12A000	1 PH	220V	23.2A	30A	2 x 2500W	3W+G	5100W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	3.0 gal.
D1000GT63A000	1 PH	120/220V	15.0/12.7A	15/15A	2 x 1600W	2W/3W+G	1800/2800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	3.0 gal.
D1000GH13A000	1 PH	220V	23.2A	30A	2 x 2500W	3W+G	5100W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	3.0 gal.
D1000GH62A000	1 PH	120/220V	15.0/12.7A	15/15A	2 x 1600W	2W/3W+G	1800/2800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	3.0 gal.

Dispenser Reference Guide

MODEL #	TLXA2201G000	TLXA2201G000D	TLXA22015000	TLXA2203G000	TLXA22035000	TLXA2204G000	TLXA2206G000	TLXA25015000
D500GT12A000	✓	✓	✓	✓	✓	✓	✓	✓
D500GT63A000	✓	✓	✓	✓	✓	✓	✓	✓
D500GTH12A000	✓	✓	✓	✓	✓	✓	✓	✓
D500GTH63A000	✓	✓	✓	✓	✓	✓	✓	✓
D1000GT12A000	✓	✓	✓	✓	✓	✓	✓	✓
D1000GT63A000	✓	✓	✓	✓	✓	✓	✓	✓
D1000GH13A000	✓	✓	✓	✓	✓	✓	✓	✓
D1000GH62A000	✓	✓	✓	✓	✓	✓	✓	✓

- For a complete dispenser reference guide see pages 76-77
- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 93-94
- Water filtration solutions for these brewers can be found on page 98



D1000GT12A000 D1000GT63A000 D500GTH12A000 D1000GH13A000 TLXA2201G000 TLXA2201G000D TLXA2203G000 TLXA2204G000 TLXA2206G000 TLXA25015000

WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

G3 Thermal Decanter Brewers

Smart Brewing



D60GT12A000

Features at a Glance

- Easy-to-Use – Simple graphic design with color-coded buttons for all operating functions.
- Saves Operating Costs – Energy save mode automatically reduces energy consumption when brewer is idle.
- Reduces Downtime – G3 on-board self-diagnostics continually sense proper brewing operation. A service phone number and error code will be displayed in the rare event technical assistance is required.
- Programmable Display Banner – Can be set to display your operation's name and message.
- Quick and Simple Installation – Standard 120VAC Operation.
- Gold Cup® Series – Digital Control Module provides precise control over all aspects of brewing time, temperature, volume, pre-infusion, pulse-brewing and water bypass.
- New highly-styled hot water faucet provides easy access to an unlimited supply of hot water for teas, soups, instants or other general need.

G3 Thermal Decanter Brewers

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR	
D60GT12A000	G3 Thermal Decanter Single Low Profile Thermal Brewer	17.75" x 9.11" x 20.38"	43.3 lbs.	4.0	
D60GT63A000	G3 Thermal Decanter Single Low Profile Thermal Brewer	17.75" x 9.11" x 20.38"	43.3 lbs.	4.0/9.0	

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					WATER			
				MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
D60GT12A000	1 PH	120V	12.5A	15A	1 x 1450W	2W+G	1500W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
D60GT63A000	1 PH	120/220V	13.6/12.0A	15/20A	2 x 1450W	2W/3W+G	1500/3300W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.

Dispenser Reference Guide

MODEL #	CLXP6401S100	CLXP6401S100D	TFT64/TFT642H	TFT64D/TFT642HD
D60GT12A000	✓	✓	✓	✓
D60GT63A000	✓	✓	✓	✓

- For a complete dispenser reference guide see pages 76-77
- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 94
- Water filtration solutions for these brewers can be found on page 98



D60GT63A000

Out of the Box Operation

Pre-programmed factory settings deliver ideal results – Now that's smart brewing.



CLXP6401S100



CLXP6401S100D



TFT64/TFT642H



TFT64D/TFT642HD



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

G3 Low Profile Airport Brewers

Compact, Enhanced Design



TLP

Features at a Glance

- External/Non-Immersed Temperature Sensor – Reduces mineral build-up.
- Pulse Brew Technology – Choice of three pulse brew options for optimal coffee flavor and brewing excellence.
- Brew Cycle Counter – Tracks brew cycles.
- Programmable Temperature Control – Factory preset to 200°F. Temperature is easily adjusted in 2°F increments from 170°F to 206°F for optimum coffee quality. Keeps brew temperature constant. Easily handles back-to-back brewing cycles. Plus, liquid level control interface prevents element burnout.
- New highly-styled hot water faucet provides easy access to an unlimited supply of hot water for teas, soups, instant or other general need.

G3 Low Profile Airpot Brewers

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR	
TLP12A	G3 Low Profile Airpot Brewers, Stainless Steel Finish, 17.75"H	17.79" x 10.65" x 18.69"	42.3 lbs.	4.5	
TLP	G3 Low Profile Airpot Brewers, Black Texture Finish, 17.75"H	17.76" x 10.65" x 18.39"	42.3 lbs.	4.5	
TLP12A19	G3 Low Profile Airpot Brewers, Stainless Steel Finish, 19.00"H	19.00" x 10.65" x 18.69"	42.3 lbs.	4.5	

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					WATER			
				MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
TLP12A	1 PH	120V	12.5A	15A	1 x 1450W	2W+G	1500W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
TLP	1 PH	120V	12.5A	15A	1 x 1450W	2W+G	1500W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
TLP12A19	1 PH	120V	12.5A	15A	1 x 1450W	2W+G	1500W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.

Dispenser Reference Guide

MODEL #	TLXA2501S000	TLXP1901S000/TLXP1901S000D
TLP12A	✓	✓
TLP	✓	✓
TLP12A19	✓	✓

- For a complete dispenser reference guide see pages 76-77
- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 94
- Water filtration solutions for these brewers can be found on page 98



TLP12A



WC-29030 Orange Sprayhead

Innovative Sprayhead

Perfectly saturates the coffee grounds to extract the richest, fullest flavor from every type of coffee, resulting in a perfect brew every time.



TLXA2501S000



TLXP1901S000



TLXP1901S000D



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

G3 Alpha® Decanter Brewers

Evolutionary Brewing Solutions



ALP5GT12A000



ALP1GT12A000

ALP2GT12A000

ALP3GT12A000

ALP3GTL12A000

ALP6GTN63A000

Features at a Glance

- Gold Cup® Series – Digital Control Module provides precise control over all aspects of brewing: time, temperature, volume plus specialty coffee needs from pre-infusion to pulse-brewing to water bypass.
- Factory Set – For out-of-the-box operation.
- Curtis' Exclusive G3 3-Year Warranty – Provides 3 full years of protection on the digital control components.
- Intuitive Scroll-Through Precision Programming – Large, brightly lighted display communicates functions at a glance. Easily adjust time, volume, temperature, brew functions and more.
- Tamper Resistant – Changeable access code prevents unauthorized adjustment.
- New highly-styled hot water faucet provides easy access to an unlimited supply of hot water for teas, soups, instants or other general need.

G3 Alpha® Decanter Brewers

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR	
ALP1GT12A000	G3 Alpha® Decanter 1 Station, 1 Lower Warmer	17.13" x 9.13" x 20.25"	37.3 lbs.	4.0	
ALP2GT12A000	G3 Alpha® Decanter 2 Station, 1 lower, 1 Upper Warmer	17.63" x 9.13" x 20.25"	38.3 lbs.	4.0	
ALP3GT12A000	G3 Alpha® Decanter 3 Station, 1 lower, 2 Upper Warmers	19.13" x 9.13" x 20.25"	39.3 lbs.	4.0	
ALP3GT63A000	G3 Alpha® Decanter 3 Station, 1 lower, 2 Upper Warmers	19.13" x 9.13" x 20.25"	39.3 lbs.	4.0/9.0	
ALP3GTR12A000	G3 Alpha® Decanter 3 Station, 3 lower, Right Warmers	17.18" x 15.84" x 20.38"	45.3 lbs.	4.0	
ALP3GTR63A000	G3 Alpha® Decanter 3 Station, 3 lower, Right Warmers	17.18" x 15.84" x 20.38"	46.3 lbs.	4.0/9.0	
ALP3GL12A000	G3 Alpha® Decanter 3 Station, 3 lower, Left Warmers	17.18" x 15.84" x 20.38"	45.3 lbs.	4.0	
ALP3GL63A000	G3 Alpha® Decanter 3 Station, 3 lower, Left Warmers	17.18" x 15.84" x 20.38"	46.3 lbs.	4.0/9.0	
ALP5GT12A000	G3 Alpha® Decanter 5 Station, 5 lower, Right/Left Warmers	17.18" x 22.56" x 20.38"	52.3 lbs.	4.0	
ALP5GT63A000	G3 Alpha® Decanter 5 Station, 5 lower, Right/Left Warmers	17.18" x 22.56" x 20.38"	53.3 lbs.	4.0/9.0	
ALP6GT63A000	G3 Alpha® Decanter 6 Station Twin, 6 Lower Warmers	17.18" x 31.58" x 20.38"	85.3 lbs.	4.0/9.0	
ALP6GTN63A000	G3 Alpha® Decanter 6 Station Twin, 4 Upper, 2 Lower Warmers	19.13" x 18.00" x 20.25"	73.3 lbs.	4.0/9.0	

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					WATER			
				MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
ALP1GT12A000	1 PH	120V	13.3A	15A	1 x 1450W	2W+G	1600W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
ALP2GT12A000	1 PH	120V	14.2A	15A	1 x 1450W	2W+G	1700W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
ALP3GT12A000	1 PH	120V	15.0A	15A	1 x 1450W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
ALP3GT63A000	1 PH	120/220V	15.0/15.0A	15/20A	2 x 1450W	2W/3W+G	1800/3300W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
ALP3GTR12A000	1 PH	120V	15.0A	15A	1 x 1450W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
ALP3GTR63A000	1 PH	120/220V	15.0/15.0A	15/20A	2 x 1450W	2W/3W+G	1800/3300W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
ALP3GL12A000	1 PH	120V	15.0A	15A	1 x 1450W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
ALP3GL63A000	1 PH	120/220V	15.0/15.0A	15/20A	2 x 1450W	2W/3W+G	1800/3300W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
ALP5GT12A000	1 PH	120V	16.3A	15A	1 x 1450W	2W+G	1950W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
ALP5GT63A000	1 PH	120/220V	16.3/15.9A	20/20A	2 x 1450W	2W/3W+G	1950/3500W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
ALP6GT63A000	1 PH	120/220V	30.0/30.0A	40/40A	2 x 1450W	2W/3W+G	3600/6600W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
ALP6GTN63A000	1 PH	120/220V	30.0/30.0A	40/40A	2 x 1450W	2W/3W+G	3600/6600W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.

- For a complete dispenser reference guide see pages 78-79
- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 95
- Water filtration solutions for these brewers can be found on page 98

WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

Pourover Brewers

Simple Brewing Solutions



CAFE1DB10A000

Features at a Glance

- Pourover operation – No plumbing required.
- Powerful heating element provides quick recovery for faster brewing.
- Large-volume water tank for greater brewing capacity.
- Space-saving design.
- Stainless steel construction with textured black powder coating.

Pourover Brewers

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR	
CAFE0AP10A000	Pourover Airpot Brewer, 2.2L	24.97" x 9.25" x 17.93"	40.7 lbs.	4.2	
CAFE0PP10A000	Pourover Single, Low Profile Thermal Carafe	17.61" x 9.25" x 17.93"	35.7 lbs.	4.2	
CAFE1DB10A000	Pourover 1 Station, 1 Lower Warmer	17.61" x 9.25" x 17.93"	35.7 lbs.	4.2	
CAFE2DB10A000	Pourover 2 Station, 1 Lower, 1 Upper Warmer	19.05" x 9.25" x 17.93"	36.7 lbs.	4.2	
CAFE3DB10A000	Pourover 3 Station, 2 Lower, 1 Upper Warmer	17.61" x 15.81" x 17.93"	43.7 lbs.	4.2	

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					HERTZ	WATER
				MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS			
CAFE0AP10A000	1 PH	120V	12.1A	15A	1 x 1450W	2W+G	1450W	50/60 Hz	Manual Fill	
CAFE0PP10A000	1 PH	120V	12.1A	15A	1 x 1450W	2W+G	1450W	50/60 Hz	Manual Fill	
CAFE1DB10A000	1 PH	120V	12.9A	15A	1 x 1450W	2W+G	1550W	50/60 Hz	Manual Fill	
CAFE2DB10A000	1 PH	120V	13.8A	15A	1 x 1450W	2W+G	1650W	50/60 Hz	Manual Fill	
CAFE3DB10A000	1 PH	120V	14.6A	15A	1 x 1450W	2W+G	1750W	50/60 Hz	Manual Fill	

Dispenser Reference Guide

MODEL #	70280000306	70280200403	70280100203	70580000303	CUSTOM BRAND	CLXP6401S100/D	TLXA22*
CAFE0AP10A000							✓
CAFE0PP10A000						✓	
CAFE1DB10A000	✓	✓	✓	✓	✓		
CAFE2DB10A000	✓	✓	✓	✓	✓		
CAFE3DB10A000	✓	✓	✓	✓	✓		

*TLXA22 model variations: TLXA2201G000, TLXA2201G000D, TLXA2201S000, TLXA2203G000, TLXA2203S000, TLXA2204G000, TLXA2206G000

- For a complete dispenser reference guide see pages 76-79
- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 95
- Water filtration solutions for these brewers can be found on page 98



CAFE0AP10A000 CAFE0PP10A000 CAFE2DB10A000 CAFE3DB10A000 70280000306 70280200403 CLXP6401S100/D TLXA2201G000

WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

Dispenser Included

Dispenser Not Included

Quick Ship

New Product

Special Order

Cord & Plug Included

Dual Voltage

Automatic Coffee Urns

Curtis. The Quality Name in Coffee Urns



RU-150-12

Features at a Glance

- Automatic refill during brew cycle.
- Thermostatically controlled for near-instant recovery.
- Closed-lid brewing creates superior flavor and full coffee aroma.
- Swing-spray head evenly saturates coffee grounds for complete extraction.

Freight prepaid in the continental USA on 2 or more RU Series Coffee Urns shipped to one location. FOB Montebello, CA.

Prepaid freight not applicable if shipped internationally, Hawaii or Puerto Rico.

Automatic Coffee Urns

MODEL #	DESCRIPTION	CUP CLEARANCE	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR	
RU-150-12	Automatic Coffee Urns - Single 3 Gallon	9.75"	29.25" x 23.75" x 16.50"	144.7 lbs.	13.0	
RU-150-20	Automatic Coffee Urns - Single 3 Gallon, 3 PH	9.75"	29.25" x 23.75" x 16.50"	144.7 lbs.	13.0	
RU-225-12	Automatic Coffee Urns - Single 6 Gallon	10.25"	32.50" x 23.50" x 16.50"	193.4 lbs.	15.0	
RU-225-20	Automatic Coffee Urns - Single 6 Gallon, 3 PH	10.25"	32.50" x 23.50" x 16.50"	193.4 lbs.	15.0	
RU-300-12	Automatic Coffee Urns - Twin 3 Gallon	9.75"	28.40" x 32.60" x 18.50"	245.1 lbs.	13.0	
RU-300-20	Automatic Coffee Urns - Twin 3 Gallon, 3 PH	9.75"	28.40" x 32.60" x 18.50"	245.1 lbs.	13.0	
RU-600-12	Automatic Coffee Urns - Twin 6 Gallon	10.25"	32.50" x 38.00" x 17.00"	311.8 lbs.	30.0	
RU-600-20	Automatic Coffee Urns - Twin 6 Gallon, 3 PH	10.25"	32.50" x 38.00" x 17.00"	311.8 lbs.	30.0	
RU-1000-12	Automatic Coffee Urns - Twin 10 Gallon	10.25"	29.50" x 38.00" x 17.00"	425.2 lbs.	30.0	
RU-1000-20	Automatic Coffee Urns - Twin 10 Gallon, 3 PH	10.25"	29.50" x 38.00" x 17.00"	425.2 lbs.	30.0	

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL						WATER			
				MIN. CIRCUIT	HEAT CONFIG	FLOW RATE	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
RU-150-12	1 PH	220V	22.7A	30A	1 x 1500W	1.6 oz/sec	3W+G	5000W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	8.0 gal.
RU-150-20	3 PH	220V	13.8A	15/20A	3 x 1750W	1.6 oz/sec	3W+G	5200W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	8.0 gal.
RU-225-12	1 PH	220V	31.8A	40A	2 x 3500W	1.8 oz/sec	3W+G	7000W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	13.0 gal.
RU-225-20	3 PH	220V	20.0A	15/30A	3 x 2500W	1.8 oz/sec	3W+G	7500W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	13.0 gal.
RU-300-12	1 PH	220V	27.3A	30A	2 x 3000W	1.6 oz/sec	3W+G	6000W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	18.0 gal.
RU-300-20	3 PH	220V	20.0A	15/30A	3 x 2500W	1.6 oz/sec	3W+G	7500W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	18.0 gal.
RU-600-12	1 PH	220V	45.5A	50A	2 x 5000W	1.8 oz/sec	3W+G	10,000W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	23.0 gal.
RU-600-20	3 PH	220V	27.6A	15/40A	3 x 3500W	1.8 oz/sec	3W+G	10,500W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	23.0 gal.
RU-1000-12	1 PH	220V	45.5A	50A	2 x 5000W	1.8 oz/sec	3W+G	10,000W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	33.0 gal.
RU-1000-20	3 PH	220V	27.5A	15/40A	3 x 3500W	1.8 oz/sec	3W+G	10,500W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	33.0 gal.



RU-225-12



RU-300-12



RU-600-12



RU-1000-12



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

Dispenser Included

Dispenser Not Included

Quick Ship

New Product

Special Order

Cord & Plug Included

Dual Voltage

G4 Omega 3.0/6.0 Gallon Brewers

High Volume Meets Precision



OMGT

Features at a Glance

- High Volume Brewing – OMGT/OMGT10 brews 36 gallons of coffee per hour. OMGS brews 25 gallons of coffee per hour.
- High Volume Tank Capacity – 6.5 gallons (Single), 14.5 gallons (Twin).
- High Volume Brew Basket – Can accommodate up to 28 oz. of ground coffee.
- G4 Digital Control Board – Password protected, precise control over all aspects of brewing, including pre-infusion, pulse-brew and volume control.
- Electrical Conversion – All Omega units ship standard from the factory as three phase. All units easily convert from three phase to single phase in the field.

G4 Omega 3.0/6.0 Gallon Brewers

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR	
OMGS	Single 3.0 Gallon Coffee Brewer — 3 Phase	40.13" x 21.38" x 23.25"	144.2 lbs.	23.3	☒ ☒
	Single 3.0 Gallon Coffee Brewer — 1 Phase	40.13" x 21.38" x 23.25"	144.2 lbs.	15.5	
OMGS16	Single 3.0 Gallon Coffee Brewer with Transformer — 3 Phase	40.13" x 21.38" x 23.25"	144.2 lbs.	23.3	☒ ☒
	Single 3.0 Gallon Coffee Brewer with Transformer — 1 Phase	40.13" x 21.38" x 23.25"	144.2 lbs.	15.5	
OMGT	Twin 6.0 Gallon Coffee Brewer — 3 Phase	40.13" x 36.50" x 23.25"	280.9 lbs.	36.0	☒ ☒
	Twin 6.0 Gallon Coffee Brewer — 1 Phase	40.13" x 36.50" x 23.25"	280.9 lbs.	24.8	
OMGT10	Twin 6.0 Gallon Coffee Brewer — 3 Phase	40.13" x 36.50" x 23.25"	280.9 lbs.	36.0	☒ ☒
	Twin 6.0 Gallon Coffee Brewer — 1 Phase	40.13" x 36.50" x 23.25"	280.9 lbs.	24.8	
OMGT16	Twin 6.0 Gallon Coffee Brewer with Transformer — 3 Phase	40.13" x 36.50" x 23.25"	280.9 lbs.	36.0	☒ ☒
	Twin 6.0 Gallon Coffee Brewer with Transformer — 1 Phase	40.13" x 36.50" x 23.25"	280.9 lbs.	24.8	

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					WATER			
				MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
OMGS	3 PH	220V	19.9A	30A	3 x 2500W	4W+G	7600W	50/60 Hz	3/8" Flare	20-90 psi	4.0 GPM	6.9 gal.
	1 PH*	220V	23.2A	30A	2 x 2500W	3W+G	5100W	50/60 Hz	3/8" Flare	20-90 psi	4.0 GPM	6.9 gal.
OMGS16	3 PH	220V	19.9A	30A	3 x 2500W	3W+G	7600W	50/60 Hz	3/8" Flare	20-90 psi	4.0 GPM	6.9 gal.
	1 PH*	220V	23.2A	30A	2 x 2500W	2W+G	5100W	50/60 Hz	3/8" Flare	20-90 psi	4.0 GPM	6.9 gal.
OMGT	3 PH	208V	34.0A	50A	3 x 4000W	4W+G	12,200W	50/60 Hz	3/8" Flare	20-90 psi	4.0 GPM	14.5 gal.
	1 PH*	208V	39.4A	50A	2 x 4000W	3W+G	8200W	50/60 Hz	3/8" Flare	20-90 psi	4.0 GPM	14.5 gal.
OMGT10	3 PH	240V	29.4A	40A	3 x 4000W	4W+G	12,200W	50/60 Hz	3/8" Flare	20-90 psi	4.0 GPM	14.5 gal.
	1 PH*	240V	34.2A	50A	2 x 4000W	3W+G	8200W	50/60 Hz	3/8" Flare	20-90 psi	4.0 GPM	14.5 gal.
OMGT16	3 PH	208V	34.0A	50A	3 x 4000W	3W+G	12,200W	50/60 Hz	3/8" Flare	20-90 psi	4.0 GPM	14.5 gal.
	1 PH*	208V	39.4A	50A	3 x 4000W	2W+G	8200W	50/60 Hz	3/8" Flare	20-90 psi	4.0 GPM	14.5 gal.

* All units ship configured for 3 phase operation and are field convertible to single phase

- For a complete dispenser reference guide see pages 76-77
- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 96
- Water filtration solutions for these brewers can be found on page 98

Dispenser Specifications

MODEL #	HEIGHT x WIDTH x DEPTH	CUP CLEARANCE
TXSG0301S200	23.75" x 14.25" x 16.25"	8.0"



OMGS



OMGT10



TXSG0301S200

Our TXSG0301S200 3.0 gallon dispenser is constructed of double-wall stainless steel that incorporates vacuum insulation, a design that is superior in retaining heat than traditional foam insulation used by other manufacturers. The creation of a vacuum between the inner and outer walls of the server prevents the exchange of temperature between the inside of the server and the outside air temperature. As a result, coffee stays hot and fresh for a longer period of time.



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

☑ Dispenser Included

☒ Dispenser Not Included

🚚 Quick Ship

NEW New Product

☒ Special Order

🔌 Cord & Plug Included

⚡ Dual Voltage

Cold Brew Coffee Systems

Perfectly Balanced, Smooth Coffee



TC-6HK
6.0 Gallon
Cold Brew Coffee System



TC-7HK
7.0 Gallon
Cold Brew Coffee System

Features at a Glance

- Heavy Gauge Food Grade Stainless Steel Construction
- Welded Handles
- Sloped Tank Bottom with Special Front Drain Design
- Stainless Steel Faucet Shaft
- 1 Toddy reusable coffee strainer
- 50 Toddy one-time use paper filters

Cold Brew Coffee Systems

MODEL #	DESCRIPTION	CAPACITY	FAUCET CLEARANCE	HEIGHT x WIDTH x DEPTH
TC-6HK	6.0 Gallon Cold Brew Coffee System Kit	6.0 Gallons	2.0"	17.34" x 15.31" x 15.83"
TC-7HK	7.0 Gallon Cold Brew Coffee System Kit	7.0 Gallons	2.0"	18.85" x 15.31" x 15.83"

TC-6HK and TC-7HK Kits come with:



Container



WC-9910 Toddy Strainer



WC-9905 Toddy Paper Filters and String

How to use:



Place strainer in container.



Place paper filter inside strainer and fill with 5 lbs. ground coffee. Pour one gallon of water over grounds.



Tie with string and pour 4 more gallons of cold water into container. Let steep 12-24 hours. Remove filters and dilute with water.



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

G4 Tea Brewers

G4 Technology Built In



G4RTB

Features at a Glance

- Generation Four (G4) digital control module
- Large, 4.3" touch screen
- Icon-driven interface
- "Fast brew" option
- Easily adjust time, volume, temperature and mode
- Cold brew lock out
- Built-in self diagnostic system

G4 Tea Brewers

MODEL #	DESCRIPTION	BREW CAPACITY	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR	
G4TBS	G4 Tea Brewer, 1.5-3.5 Gallon, Low Profile	1.5-3.0 gal.	27.36" x 10.11" x 22.82"	144.2 lbs.	12.0	
G4TBP	G4 Tea Brewer, Polaris Low Profile*	3.0 gal.	29.38" x 10.97" x 25.70"	144.2 lbs.	12.0	
G4TB	G4 Tea Brewer	3.0 gal.	34.29" x 10.11" x 22.82"	144.2 lbs.	12.0	
G4STB	G4 Tea Brewer, Short Sweet Tea Brewer	3.0 gal.	34.29" x 10.11" x 22.82"	280.9 lbs.	12.0	
G4RTB	G4 Tea Brewer, Rotating Basket Tea Brewer	3.0 gal./side	34.29" x 13.16" x 22.96"	280.9 lbs.	12.0	
G4RSTB	G4 Tea Brewer, Rotating Sweet Tea Brewer	3.0 gal./side	34.24" x 13.16" x 22.96"	280.9 lbs.	12.0	

* Comes with TCO308 Dispenser

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					WATER			
				MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
G4TBS	1 PH	120V	13.8A	15A	1 x 1600W	2W+G	1650W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
G4TBP	1 PH	120V	13.8A	15A	1 x 1600W	2W+G	1650W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
G4TB	1 PH	120V	13.8A	15A	1 x 1600W	2W+G	1650W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
G4STB	1 PH	120V	13.8A	15A	1 x 1600W	2W+G	1650W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
G4RTB	1 PH	120V	13.8A	15A	1 x 1600W	2W+G	1650W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
G4RSTB	1 PH	120V	13.8A	15A	1 x 1600W	2W+G	1650W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.

Dispenser and Stand Reference Guide

MODEL #	TCO308	TCORS	TCO421	TC-3H	TCN	TCNL	TCNV	TCN1510	TCN14	TCNV14	TFT15G/TXSG	TCNRS	TCNRS521A000
G4TBS								✓	✓	✓		✓	✓
G4TBP	✓	✓											
G4TB			✓	✓	✓	✓	✓						
G4STB			✓	✓	✓	✓	✓						
G4RTB					✓	✓	✓						
G4RSTB					✓	✓	✓						

- For a complete dispenser reference guide see pages 80-81
- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 96-97
- Water filtration solutions for these brewers can be found on page 98



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

G4 Tea/Coffee Combo Brewers

G4 Technology Built In



G4CBHT



Features at a Glance

- Generation Four (G4) digital control module
- Large, 4.3" touch screen
- Icon-driven interface
- "Fast brew" option
- Easily adjust time, volume, temperature and mode
- Cold brew lock out
- Built-in self diagnostic system

G4 Tea Brewers

MODEL #	DESCRIPTION	BREW CAPACITY	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR	
G4CB	G4 Tea/Coffee Combo Brewer, Adj Shelf	3.0 gal. tea; 85 oz. coffee	34.29" x 10.11" x 22.76"	57.3 lbs.	12.0	
G4CBHS	G4 Single Tea/Coffee Combo Brewer	3.0 gal. tea; 192 oz. coffee/side	36.71" x 10.07" x 22.82"	72.0 lbs.	12.0	
G4CBHT	G4 Twin Tea/Coffee Combo Brewer	3.0 gal. tea; 192 oz. coffee/side	36.71" x 18.11" x 22.82"	119.4 lbs.	21.0	

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					WATER			
				MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
G4CB	1 PH	120V	13.8A	15A	1 x 1600W	2W+G	1650W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
G4CBHS	1 PH	120/220V	15.0/12.7A	15/20A	2 x 1600W	2W/3W+G	1800/2800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	2.9 gal.
G4CBHT	1 PH	220V	23.0/34.0A	30/50A	3 x 2500W	3W+G	5100/7500W	50/60 Hz	1/4" Flare	20 - 90 psi	2.0 GPM	5.2 gal.

Dispenser and Stand Reference Guide

MODEL #	TCO308	TCORS	TCO421	TC-3H	TCN	TCNL	TCNV	TCN1510	TCN14	TCNV14	TFT15G/TXSG	TCNRS	TCNRS521A000
G4CB			✓	✓	✓	✓	✓					✓	✓
G4CBHS*					✓	✓	✓	✓	✓	✓	✓	✓	✓
G4CBHT*					✓	✓	✓	✓	✓	✓	✓	✓	✓

* Also TXSG1501S600 and TFT15G Dispensers

- For a complete dispenser reference guide see pages 76-77, 80-81
- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 96-97
- Water filtration solutions for these brewers can be found on page 98



G4CB

G4CBHS

G4CBHT

WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

G3 Tea Brewers

Refreshing Tea Flavors



RSTB

Features at a Glance

- G3 Digital Control Module – Provides precise control for gourmet fine tuning with pulse-brewing, delay, and all critical brewing functions
- G3 Enhanced Tea Flavor and Clarity – With digital accuracy, two separate precision valves provide unsurpassed control over concentrate brewing and dilution cycles
- “Fast Brew” Option – Program selectable. Shortens brew time by allowing concentrate and dilution cycles to run at the same time
- Intuitive Scroll-Through Precision Programming – Large, brightly lit display communicates functions at a glance. Easily adjust time, volume, temperature, brew functions and more
- Cold Water Brew Lock-Out – Prevents brewing when water temperature is below set level

G3 Tea Brewers

MODEL #	DESCRIPTION	BREW CAPACITY	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR	
TBS	G3 Tea Brewer, 1.5-3.5 Gallon Low Profile	1.5-3.0 gal.	27.27" x 10.11" x 22.82"	144.2 lbs.	12.0	
TBP	G3 Tea Brewer, Polaris Low Profile*	3.0 gal.	29.38" x 10.97" x 25.70"	144.2 lbs.	12.0	
TB	G3 Tea Brewer, Short Tea Brewer	3.0 gal.	34.20" x 10.11" x 22.82"	144.2 lbs.	12.0	
TBT	G3 Tea Brewer, Tall Tea Brewer	3.0 gal.	38.45" x 10.11" x 22.82"	144.2 lbs.	12.0	
STB	G3 Tea Brewer, Short Sweet Tea Brewer	3.0 gal.	34.20" x 10.11" x 22.82"	280.9 lbs.	12.0	
RTB	G3 Tea Brewer, Rotating Basket Tea Brewer	3.0 gal./side	34.20" x 13.16" x 22.96"	280.9 lbs.	12.0	
RSTB	G3 Tea Brewer, Rotating Sweet Tea Brewer	3.0 gal./side	34.20" x 13.16" x 22.96"	280.9 lbs.	12.0	

* Comes with TC0308 Dispenser

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					WATER			
				MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
TBS	1 PH	120V	13.8A	15A	1 x 1600W	2W+G	1650W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
TBP	1 PH	120V	13.8A	15A	1 x 1600W	2W+G	1650W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
TB	1 PH	120V	13.8A	15A	1 x 1600W	2W+G	1650W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
TBT	1 PH	120V	13.8A	15A	1 x 1600W	2W+G	1650W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
STB	1 PH	120V	13.8A	15A	1 x 1600W	2W+G	1650W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
RTB	1 PH	120V	13.8A	15A	1 x 1600W	2W+G	1650W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
RSTB	1 PH	120V	13.8A	15A	1 x 1600W	2W+G	1650W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.

Dispenser Reference Guide

MODEL #	TC0308	TCORS	TCO421	TC-3H	TCN	TCNL	TCNV	TCN1510	TCN14	TCNV14	TCNRS	TCNRS21A000
TBS								✓	✓	✓	✓	✓
TBP	✓	✓										
TB			✓	✓	✓	✓	✓					
TBT			✓	✓	✓	✓	✓					
STB			✓	✓	✓	✓	✓					
RTB					✓	✓	✓					
RSTB					✓	✓	✓					

- For a complete dispenser reference guide see pages 80-81
- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 96-97
- Water filtration solutions for these brewers can be found on page 98



TBS

TBP

TB

TBT

RTB



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

Dispenser Included

Dispenser Not Included

Quick Ship

New Product

Special Order

Cord & Plug Included

Dual Voltage

G3 Tea/Coffee Combo Brewers

Simple Tea and Coffee Brewing Solutions



CBHT
Shown with one 3.5 gallon TCN and one 1.5 gallon TXSG1501S600

Features at a Glance

- G3 Digital Control Module – Provides precise control for gourmet fine tuning with pulse-brewing, delay, and all critical brewing functions.
- Multiple Options - Single, simple brewing solutions for iced tea and gourmet coffee with one brewer.
- Intuitive Scroll-Through Precision Programming
 - Large, brightly lighted display communicates functions at a glance. Easily adjust time, volume, temperature, brew functions and more.
- G3 Enhanced Tea Flavor and Clarity – With digital accuracy, two separate precision valves provide unsurpassed control over concentrate brewing and dilution cycles.
- “Fast Brew” Option – Program selectable. Shortens brew time by allowing concentrate and dilution cycles (excluding high volume combo brewers) to run at the same time.
- New highly-styled hot water faucet provides easy access to an unlimited supply of hot water for teas, soups, instants or other general need.

G3 Tea/Coffee Combo Brewers

MODEL #	DESCRIPTION	BREW CAPACITY	HEIGHT x WIDTH x DEPTH	BREWER FILL WEIGHT	BREWED GAL/HR	
CBP	Combo Polaris Low Profile*	3.0 gal. tea/85 oz. coffee	29.38" x 10.97" x 25.70"	59.3 lbs.	12.0 (tea), 5.0 (coffee)	
CB	Combo with Adjustable Shelf	3.0 gal. tea/85 oz. coffee	34.20" x 10.07" x 22.76"	57.3 lbs	12.0 (tea), 5.0 (coffee)	
CBHS	Single Hi-Volume Combo	3.0 gal. tea/192 oz. coffee	36.71" x 10.07" x 22.82"	72.0 lbs.	12.0	
CBHT	Twin Hi-Volume Combo	3.0 gal. tea/192 oz. coffee	36.75" x 18.13" x 22.88"	119.4 lbs.	21.0	
CBHS67000-001	Single Hi-Volume Combo, No Iced Coffee	3.0 gal. tea/192 oz. coffee	36.71" x 10.07" x 22.82"	72.0 lbs.	12.0	
CBHT17000-001	Twin Hi-Volume Combo, No Iced Coffee	3.0 gal. tea/192 oz. coffee	36.75" x 18.13" x 22.88"	119.4 lbs.	21.0	

* Comes with TCO308 Dispenser

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					WATER			
				MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
CBP	1 PH	120V	13.8A	15A	1 x 1600W	2W+G	1650W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
CB	1 PH	120V	13.8A	15A	1 x 1600W	2W+G	1650W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
CBHS	1 PH	120/220V	15.0/12.7A	15/20A	2 x 1600W	2W/3W+G	1800/2800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	2.9 gal.
CBHT	1 PH	220V	23.0/34.0A	30/50A	3 x 2500W	3W+G	5100/7500W	50/60 Hz	1/4" Flare	20 - 90 psi	2.0 GPM	5.2 gal.
CBHS67000-001	1 PH	120/220V	15.0/12.7A	15/20A	2 x 1600W	2W/3W+G	1800/2800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	2.9 gal.
CBHT17000-001	1 PH	220V	23.0/34.0A	30/50A	3 x 2500W	3W+G	5100/7500W	50/60 Hz	1/4" Flare	20 - 90 psi	2.0 GPM	5.2 gal.

Dispenser and Stand Reference Guide

MODEL #	TCO308A000	TCO421A000	TC-3H	TC-5H-S	TCN	TCNV	TCNL	TCNC	TCN1510	TCN14	TCNV14	TCNRS	TCNRS21A000
CBP	✓												
CB		✓	✓	✓	✓	✓	✓	✓				✓	✓
CBHS					✓	✓	✓	✓				✓	✓
CBHT					✓	✓	✓	✓				✓	✓

MODEL #	CLXP6401S1000	CLXP6401S1000D	TLXA2201S000	TLXA2501S000	TLXA3001S000	TXSG1501S600	TFT64	TFT64D	TFT15G
CBP	✓	✓					✓	✓	
CB	✓	✓	✓	✓	✓		✓	✓	
CB3							✓		✓
CBHT							✓		✓

- For a complete dispenser reference guide see pages 76-77, 80-81
- Brew basket options for these brewers can be found on pages 90
- Paper filters for these brewers can be found on pages 96-97
- Water filtration solutions for these brewers can be found on page 98



CBP

CB

CBHS

WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

Liquid Iced Tea/Coffee Dispensers

Very Easy, Very Refreshing



TCC1C



TCC1

Features at a Glance

- Mixing chambers have been designed and engineered for enhanced blending performance
- Easily adjustable concentrate-to-water mixing ratio
- Drip tray and quick disconnect included
- Braided hoses
- Extra length hose for under-counter or remote bag-in-box applications

Accessories

MODEL #	DESCRIPTION
WC-8654	Scholle "L" Bag Connector
WC-53117-101K	Stainless Steel Bottle Silicon Tube Kit







WC-8654



WC-53117-101K

Liquid Iced Tea/Coffee Dispensers

MODEL #	DESCRIPTION	CUP CLEARANCE*	HEIGHT x WIDTH x DEPTH	DISPENSER FILL WEIGHT
TCC1	Iced Tea Concentrate Dispensers Single Faucet Oval 24"H	8.50"	24.63" x 9.38" x 17.88"	45.0 lbs. 
TCC1C	Iced Coffee Concentrate Dispensers Single Faucet Oval 24"H	8.50"	24.63" x 9.38" x 17.88"	45.0 lbs.
TCC1N	Iced Tea Concentrate Dispensers Single Faucet Narrow 21"H	8.25"	21.00" x 6.25" x 22.88"	54.4 lbs. 
TCC2	Iced Tea Concentrate Dispensers Dual Faucet Oval 24"H	8.38"	24.63" x 9.38" x 17.88"	46.0 lbs. 
TCC2N	Iced Tea Concentrate Dispensers Dual Faucet Narrow 21"H	8.50"	21.00" x 6.25" x 23.00"	55.4 lbs.
TCC2S	Iced Tea Concentrate Dispensers Dual Faucet Short 17"H	7.25"	17.00" x 9.38" x 17.88"	22.3 lbs. 
TCC3	Iced Tea Concentrate Dispensers Triple Faucet Oval 28"H	8.50"	28.13" x 14.25" x 13.88"	47.0 lbs.
TCC3N	Iced Tea Concentrate Dispensers Triple Faucet Narrow 28"H	8.50"	28.13" x 9.38" x 17.88"	48.0 lbs.
TCC3S	Iced Tea Concentrate Dispensers Triple Faucet Short 17"H	7.25"	17.00" x 14.25" x 13.88"	27.5 lbs.

Utility Requirements

MODEL #	DISPENSER FLOW RATE	UNIT SPECS			WATER		
		CONNECTOR	COMPARTMENT CAPACITY	DISPENSER HEADS	CONNECTOR	PRESSURE	MIN. FLOW RATE
TCC1	0.6 gal./min.	QCD2	3.0 gal. Max	1	1/4" Flare	20 - 90 psi	1.0 GPM
TCC1C	0.6 gal./min.	QCD2	3.0 gal. Max	1	1/4" Flare	20 - 90 psi	1.0 GPM
TCC1N	0.6 gal./min.	QCD2	4.0 gal. Max	1	1/4" Flare	20 - 90 psi	1.0 GPM
TCC2	0.6 gal./min.	QCD2	3.0 gal. Max	2	1/4" Flare	20 - 90 psi	1.0 GPM
TCC2N	0.6 gal./min.	QCD2	4.0 gal. Max	2	1/4" Flare	20 - 90 psi	1.0 GPM
TCC2S	0.6 gal./min.	SCHOLLE "L"	2 Bibs - 1/2 gal. each	2	1/4" Flare	20 - 90 psi	1.0 GPM
TCC3	0.6 gal./min.	QCD2	3.0 gal. Max	3	1/4" Flare	20 - 90 psi	1.0 GPM
TCC3N	0.6 gal./min.	QCD2	3.0 gal. Max	3	1/4" Flare	20 - 90 psi	1.0 GPM
TCC3S	0.6 gal./min.	SCHOLLE "L"	3 Bibs - 1/2 gal. each	3	1/4" Flare	20 - 90 psi	1.0 GPM

• Water filtration solutions for these dispensers can be found on page 98



TCC2

TCC3

TCC1N

TCC2N

TCC3N

TCC2S

TCC3S



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

 Dispenser Included

 Dispenser Not Included

 Quick Ship

 New Product

 Special Order

 Cord & Plug Included

 Dual Voltage

Chill-X Frozen Beverage Machine

Cool, Refreshing Frozen Beverages... Anytime.

NEW



CFBX2

Features at a Glance

- Optional Auto Refill System - Reduce labor with the optional Chill-X automatic product refill system. No need to prepare the mix and refill the machine, the auto-fill feature does it automatically.
- Product Options - In addition to traditional frozen beverages, the Chill-X can serve dairy-based and alcohol-based products.
- Digital Control Board - Features an innovative digital display that indicates temperature of the beverage and machine settings at the touch of a button.
- Preventive Maintenance Reminder - The control board can signal the need for periodic maintenance on key components. Reduces downtime and ensures top performance.
- Zero Side Clearance Space - The patented Ventilation Design allows for air to flow from front to rear, eliminating the need to any side clearance. Maximizes precious counter space.
- Patented Quick Defrost Mode - 75% faster than thawing at room temperature to avoid long defrosting times.

NEW

Frozen Beverage Machine

MODEL #	DESCRIPTION	CUP CLEARANCE	HEIGHT x WIDTH x DEPTH
CFBX2	Chill-X Twin Frozen Beverage Machine	11.75"	35.00" x 17.92" x 23.73"



Utility Requirements

MODEL #	PHASE	VOLTS	ELECTRICAL			
			AMPS	WIRE	WATTS	HERTZ
CFBX2	1 PH	115V	12.0A	2W+G	1380W	60 Hz

Note: Input water pressure cannot exceed 50 psi.

Auto-Fill Kit (WC-100254K) Components:

Sold Separately.



WC-100255

Auto-Fill Lid Equipped with Product Level Sensor and Syrup Out Indicator
(Kit includes 1 lid only)



WC-100254

Supply Lines, Transformer, John Guest Connectors, Pump, Power Supply



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

Dispenser Included

Dispenser Not Included

Quick Ship

NEW New Product

Special Order

Cord & Plug Included

Dual Voltage

G3 Primo Cappuccino™

Cappuccino & Multi-Flavored Systems



PCGT5

Features at a Glance

- G3 Digital Control Module - Provides precise control over all critical blending and dispensing functions.
- Pre-Dispense - Easy to use. Choose a size from small, medium or large by the touch of a button.
- Factory Pre-Set - For out-of-the-box operation.
- LCD Digital Display - Extra bright and easy to use.
- Scroll-Through Precision Programming - Adjust powder flow in 5% increments and water temperature from 80°F to 200°F to create the perfect hot or cold beverage.

• Water filtration solutions for these dispensers can be found on page 98

Primo Cappuccino™

MODEL #	DESCRIPTION	CUP CLEARANCE	HEIGHT x WIDTH x DEPTH	DISPENSER FILL WEIGHT	GAL/HR	
PCGT3	3 Station (1-5 lb & 2-10 lb Hoppers)	8.38"	34.78" x 14.25" x 24.54"	194.2 lbs.	5.4	
PCGT3DV	3 Station (1-5 lb & 2-10 lb Hoppers)	8.38"	34.78" x 14.25" x 24.54"	194.2 lbs.	5.4/10.7	
PCGT3300	3 Station with Lift Door (1-5 lb & 2-10 lb Hoppers)	8.38"	34.78" x 14.25" x 24.54"	194.2 lbs.	5.4	
PCGT3700	3 Station, Pre-Set Dispense (1-5 lb & 2-10 lb Hoppers)	8.38"	34.78" x 14.25" x 24.54"	194.2 lbs.	5.4	
PCGT3800	3 Station (1-5 lb & 2-10 lb Hoppers) with Hot Water Faucet	8.38"	34.78" x 14.25" x 24.54"	194.2 lbs.	5.4	
PCGT3900	3 Station, Iced Coffee (1-5 lb & 2-10 lb Hoppers)	8.38"	34.78" x 14.25" x 24.54"	194.2 lbs.	5.4	
PCGT4	4 Station (2-5 lb & 2-10 lb Hoppers)	8.38"	34.78" x 20.86" x 24.54"	221.2 lbs.	5.4	
PCGT4300	4 Station with Lift Door (2-5 lb & 2-10 lb Hoppers)	8.38"	34.78" x 20.86" x 24.54"	221.2 lbs.	5.4	
PCGT5	5 Station (3-5 lb & 2-10 lb Hoppers)	8.38"	34.78" x 20.86" x 24.54"	239.2 lbs.	5.4	
PCGT5DV	5 Station (3-5 lb & 2-10 lb Hoppers)	8.38"	34.78" x 20.86" x 24.54"	239.2 lbs.	5.4/10.7	
PCGT5300	5 Station with Lift Door (3-5 lb & 2-10 lb Hoppers)	8.38"	34.78" x 20.86" x 24.54"	239.2 lbs.	5.4	
PCGT5800	5 Station with Hot Water Faucet (3-5 lb & 2-10 lb Hoppers)	8.38"	34.78" x 20.86" x 24.54"	239.2 lbs.	5.4	
PCGT6	6 Station, Inside Door Display (2-3 lb, 3-5 lb & 1-10 lb Hoppers)	8.38"	34.78" x 20.86" x 24.54"	235.2 lbs.	5.4	
PCGT6300	6 Station with Lift Door (2-3 lb, 3-5 lb & 1-10 lb Hopper)	8.38"	34.78" x 20.86" x 24.54"	235.2 lbs.	5.4	

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					WATER			
				MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
PCGT3	1 PH	120V	15.0A	15A	1 x 1600 W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	5.3 Gal.
PCGT3DV	1 PH	120/220V	15.0A/14.5A	15/20A	2 x 1600 W	2W/3W+G	1800W/3000W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	5.3 Gal.
PCGT3300	1 PH	120V	15.0A	15A	1 x 1600 W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	5.3 Gal.
PCGT3700	1 PH	120V	15.0A	15A	1 x 1600 W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	5.3 Gal.
PCGT3800	1 PH	120V	15.0A	15A	1 x 1600 W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	5.3 Gal.
PCGT3900	1 PH	120V	15.0A	15A	1 x 1600 W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	5.3 Gal.
PCGT4	1 PH	120V	15.0A	15A	1 x 1600 W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	5.3 Gal.
PCGT4300	1 PH	120V	15.0A	15A	1 x 1600 W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	5.3 Gal.
PCGT5	1 PH	120V	15.0A	15A	1 x 1600 W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	5.3 Gal.
PCGT5DV	1 PH	120/220V	15.0A/14.5A	15/20A	2 x 1600 W	2W/3W+G	1800W/3000W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	5.3 Gal.
PCGT5300	1 PH	120V	15.0A	15A	1 x 1600 W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	5.3 Gal.
PCGT5800	1 PH	120V	15.0A	15A	1 x 1600 W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	5.3 Gal.
PCGT6	1 PH	120V	15.0A	15A	1 x 1600 W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	5.3 Gal.
PCGT6300	1 PH	120V	15.0A	15A	1 x 1600 W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	5.3 Gal.



PCGT3



PCGT3900



PCGT4



PCGT6



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

Dispenser Included

Dispenser Not Included

Quick Ship

New Product

Special Order

Cord & Plug Included

Dual Voltage

Café Primo Cappuccino™ Systems

Sometimes Simple is the Perfect Fit



CAFEP4CS1000

Features at a Glance

- Fits Anywhere – The Café PC's compact size lets you place it virtually anywhere. A close water connection and standard 120VAC power allows use of any available outlet.
- Low Maintenance Costs – The key components that ensure reliable operation in the Café PC are the same heavy-duty components used in our top-of-the-line PCGT models. Many components are shared across all four models within the Café Series.
- Consistent Drink Quality – Café models utilize Curtis' proven advanced digital control module that allows precision blending for consistently great beverages. Powder-to-water ratio is set right from the front panel, so there's never a need to manually adjust internal valves. Plus, Café series machines can be set for continuous or portion control dispensing.

• Water filtration solutions for these dispensers can be found on page 98

Café Primo Cappuccino™ Systems

MODEL #	DESCRIPTION	CUP CLEARANCE	HEIGHT x WIDTH x DEPTH	DISPENSER FILL WEIGHT	GAL/HR
CAFEP1CS10000	Café Primo Cappuccino Systems 1 Station, 7 lb Hopper	8.00"	31.13" x 10.00" x 22.25"	82.7 lbs.	5.3
CAFEP2CS10000	Café Primo Cappuccino Systems 2 Station, 4 lb Hopper	8.00"	31.13" x 10.00" x 22.25"	88.7 lbs.	5.3
CAFEP3CS10000	Café Primo Cappuccino Systems 3 Station, 4 lb Hopper	8.00"	31.13" x 11.75" x 22.25"	104.7 lbs.	5.3
CAFEP3CS10900	Café Primo Cappuccino Systems Iced Coffee, 3 Stn, 4 lb Hoppers	8.00"	31.13" x 11.75" x 22.25"	104.7 lbs.	5.3
CAFEP4CS10000	Café Primo Cappuccino Systems 4 Station, 4 lb Hoppers	8.00"	31.13" x 15.00" x 22.25"	118.7 lbs.	5.3

Utility Requirements


MODEL #	PHASE	VOLTS	ELECTRICAL						WATER			
			AMPS	MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
CAFEP1CS10000	1 PH	120V	15.0A	15A	1 x 1600 W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	2.0 Gal.
CAFEP2CS10000	1 PH	120V	15.0A	15A	1 x 1600 W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	2.0 Gal.
CAFEP3CS10000	1 PH	120V	15.0A	15A	1 x 1600 W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	2.0 Gal.
CAFEP3CS10900	1 PH	120V	15.0A	15A	1 x 1600 W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	2.0 Gal.
CAFEP4CS10000	1 PH	120V	15.0A	15A	1 x 1600 W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	2.0 Gal.




CAFEP1CS1000



CAFEP2CS10000

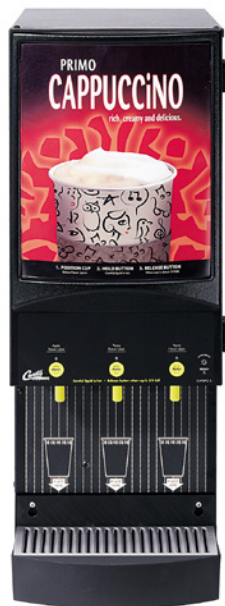

CAFEP3CS1000

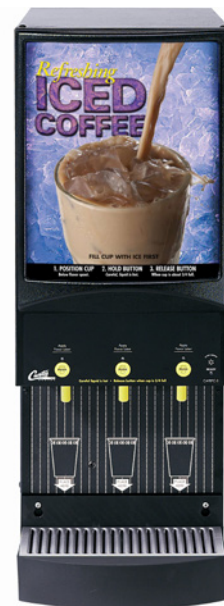

CAFEP3CS10900



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

Dispenser Included

Dispenser Not Included

Quick Ship

New Product

Special Order

Cord & Plug Included

Dual Voltage

Café Primo Cappuccino™ with Lightbox

Cappuccino Anytime, Anywhere











CAFEP4CL10000

Features at a Glance

- Fits Anywhere – The Café PC's compact size lets you place it virtually anywhere. A close water connection and standard 120VAC power allows use of any available outlet.
- Low Maintenance Costs – The key components that ensure reliable operation in the Café PC are same heavy-duty components used in our top-of-the-line PCGT models. Many components are shared across all four models within the Café Series.
- Consistent Drink Quality – Café models utilize Curtis' proven advanced digital control module that allows precision blending for consistently great beverages. Powder-to-water ratio is set right from the front panel, so there's never a need to manually adjust internal valves. Plus, Café series machines can be set for continuous or portion control dispensing.

• Water filtration solutions for these dispensers can be found on page 98

Café Primo Cappuccino™ with Lightbox

MODEL #	DESCRIPTION	CUP CLEARANCE	HEIGHT x WIDTH x DEPTH	DISPENSER FILL WEIGHT	GAL/HR	
CAFEP1CL10000	Café Primo Cappuccino with Light Box, 1 Station, 7 lb Hopper	8.00"	31.13" x 10.00" x 22.25"	82.7 lbs.	5.3	 
CAFEP2CL10000	Café Primo Cappuccino with Light Box, 2 Station, 4 lb Hoppers	8.00"	31.13" x 10.00" x 22.25"	88.7 lbs.	5.3	 
CAFEP3CL10000	Café Primo Cappuccino with Light Box, 3 Station, 4 lb Hoppers	8.00"	31.13" x 11.75" x 22.25"	104.7 lbs.	5.3	 
CAFEP4CL10000	Café Primo Cappuccino with Light Box, 4 Station, 4 lb Hoppers	8.00"	31.13" x 15.00" x 22.25"	118.7 lbs.	5.3	 

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					WATER			
				MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
CAFEP1CL10000	1 PH	120V	15.0A	15A	1 x 1600 W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	2.0 Gal.
CAFEP2CL10000	1 PH	120V	15.0A	15A	1 x 1600 W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	2.0 Gal.
CAFEP3CL10000	1 PH	120V	15.0A	15A	1 x 1600 W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	2.0 Gal.
CAFEP4CL10000	1 PH	120V	15.0A	15A	1 x 1600 W	2W+G	1800W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	2.0 Gal.



CAFEP1CL10000



CAFEP2CL10000



CAFEP3CL10000



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

 Dispenser Included

 Dispenser Not Included

 Quick Ship

 New Product

 Special Order

 Cord & Plug Included

 Dual Voltage

Gemini® Satellite Dispensers & Warmers

Take Coffee Service Anywhere



GEM3XIFT



GEM5XSIFT



GEM5XTIFT



GEM3IF



GEM5IF



GEM5IFT



GEM-3



GEM-3D



GEM-3-5



GEM-5

Features at a Glance

Gemini® Satellite Dispensers

- Coffee maintains its rich, full-bodied flavor in double wall insulated servers.
- Warmers can be set on high, medium or low to preserve peak flavor.
- Uniquely designed faucet and sight glass connections practically eliminate heat loss.

IntelliFresh® and IntelliFresh® with FreshTrac® Satellite Dispensers and Warmers

- Engineered for easy maintenance – Smart, water tolerant design. No foam or fiber insulation.
- Temperature can be set through the digital control board to high, medium or low to preserve peak coffee freshness – Factory set to 185°F. Quality timer is set to 2 hours.

Gemini® Satellite Dispensers & Warmers

SATELLITES & WARMERS

MODEL #	DESCRIPTION	CAPACITY	HEIGHT x WIDTH x DEPTH	
GEM-3	Gemini 1.5 gal. Satellite Server	1.5 gal.	10.84" x 8.94" x 13.35"	
GEM-3D	Gemini 1.5 gal. Satellite Server Decaf Faucet	1.5 gal.	10.84" x 8.94" x 13.35"	
GEM-3-5	Gemini 1.5 gal. Satellite Server & Warmer Stand	1.5 gal.	20.58" x 8.94" x 13.35"	
GEM-5	Gemini Warmer Stand	N/A	9.98" x 8.94" x 11.70"	

SATELLITES & WARMERS WITH INTELLIFRESH® TECHNOLOGY

GEM3IF	Gemini 1.5 Gal Satellite Server with IntelliFresh®	1.5 gal.	11.72" x 8.94" x 13.48"	
GEM5IF	Gemini IntelliFresh® Warmer Stand	N/A	11.65" x 9.24" x 13.88"	
GEM5IFT	Gemini Twin IntelliFresh® Warmer Stand	N/A	11.70" x 18.27" x 13.93"	

GEMX® SATELLITES & WARMERS WITH INTELLIFRESH® AND FRESHTRAC® TECHNOLOGY

GEM3XIFT	GemX 1.5 Gal Satellite Server with IntelliFresh® and FreshTrac®	1.5 gal.	11.42" x 9.04" x 13.85"	
GEM5XSIFT	GemX IntelliFresh® and FreshTrac® Warmer Stand	N/A	11.87" x 9.25" x 11.07"	
GEM5XTIFT	GemX Twin IntelliFresh® and FreshTrac® Warmer Stand	N/A	11.87" x 18.50" x 11.07"	

Utility Requirements

SATELLITES & WARMERS

MODEL #	VOLTS	AMPS	ELECTRICAL		
			MIN CIRCUIT	WIRE	WATTS
GEM-3	-	-	-	-	-
GEM-3D	-	-	-	-	-
GEM-3-5	120V	1A	15A	2W+G	100W
GEM-5	120V	1A	15A	2W+G	100W

SATELLITES & WARMERS WITH INTELLIFRESH® TECHNOLOGY

GEM3IF	120V	.60A	15A	2W+G	71W
GEM5IF	120V	.60A	15A	2W+G	71W
GEM5IFT	120V	1.20A	15A	2W+G	142W

GEM X SATELLITES & WARMERS WITH INTELLIFRESH® AND FRESHTRAC® TECHNOLOGY

GEM3XIFT	120V	.60A	15A	2W+G	71W
GEM5XSIFT	120V	.60A	15A	2W+G	71W
GEM5XTIFT	120V	1.20A	15A	2W+G	142W

Dispensers & Warmers Reference Guide

MODEL #	GEM-3	GEM-3D	GEM-3-5	GEM-5
G4GEMS63A1000	✓	✓	✓	✓
G4GEMT10A1000	✓	✓	✓	✓
GEMSS10A1000	✓	✓	✓	✓
GEMSS63A1000	✓	✓	✓	✓
GEMTS10A1000	✓	✓	✓	✓
GEMTS16A1000	✓	✓	✓	✓
GEMTS19A1000	✓	✓	✓	✓
GEM-120A-10	✓	✓	✓	✓
GEM-120A-63	✓	✓	✓	✓
GEM-12D-10	✓	✓	✓	✓
GEM-12D-16	✓	✓	✓	✓
GEM-12D-19	✓	✓	✓	✓

Dispensers & Warmers with IntelliFresh® / IntelliFresh® and FreshTrac® Reference Guide

MODEL #	GEM 3IF	GEM5IF	GEM5IFT	GEM3XIFT	GEM5XSIFT	GEM5XTIFT
G4GEMSIF63A1000	✓	✓	✓			
G4GEMTIF10A1000	✓	✓	✓			
GEMSIF10A1000	✓	✓	✓			
GEMTIF10A1000	✓	✓	✓			
GEMSIF63A1000	✓	✓	✓			
G4GEMXSIFT63A1000				✓	✓	✓
G4GEMXTIFT10A1000				✓	✓	✓
GEMXSIFT63A1000				✓	✓	✓
GEMXTIFT10A1000				✓	✓	✓



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

Thermal Dispensers

Keeps Coffee with "Just Brewed" Freshness

Features at a Glance

- TXSG Server's Integral base makes it easy to create remote coffee stations. Separate drip tray for easy cleaning. Sturdy handles and dual function faucet guard provide multiple carrying points for ease of transportation
- ThermoPro® dispensers are compatible with many different brewing systems. By brewing directly into the server, coffee flavor and temperature are kept at its optimum
- Smaller ThermoPro® models can be left on the table freeing up wait staff and ensuring customer satisfaction
- Brew-thru top keeps heat and flavor in, while stainless steel liner provides commercial durability



TLXA2201G000



TLXA2203G000



TLXA2204G000



TLXA2206G000



TLXP1901S000



TLXA0101S000



TLXA2501S000



TLXA3001S000



TXSG0101S600



TXSG1501S600



TXSG0301S200



TFT64/TFT642H



TFT64D/TFT642HD



CLXP6401S100



TFT1G



TFT15G



TFTR1G



TFTR15G

Thermal Dispensers

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	CASE COUNT	
CLXP6401S100	Seamless Pourpot, 64 oz, SS Exterior/Liner, Brew-Thru Lid	7.04"H x 9.26"D	6	
CLXP6401S100D	Seamless Pourpot, 64 oz, SS Exterior/Liner, Brew-Thru Decaf Lid	7.04"H x 9.26"D	6	
TLXA0101S000	Airpot, 1.0 Gallon, SS Exterior/Liner, Lever Handle	16.00"H x 6.00"D	6	
TLXA2201G000	Airpot, 2.2L SS Exterior, Glass Liner, Lever Handle	16.00"H x 6.00"D	6	
TLXA2201G000D	Airpot, 2.2L SS Exterior Glass Liner, Lever Handle, Decaf Lid	16.00"H x 6.00"D	6	
TLXA2201S000	Airpot, 2.2L SS Exterior/Liner, Lever Handle	16.00"H x 6.00"D	6	
TLXA2203G000	Airpot, 2.2L Black Plastic Exterior, Glass Liner, Lever Handle	16.00"H x 6.00"D	6	
TLXA2203G000D	Airpot, 2.2L Black Plastic Exterior, Glass Liner, Lever Handle, Decaf Lid	16.00"H x 6.00"D	6	
TLXA2203S000	Airpot, 2.2L Black Plastic Exterior, SS Liner, Lever Handle	16.00"H x 6.00"D	6	
TLXA2204G000	Airpot, 2.2L Blue Plastic Exterior, Glass Liner, Lever Handle	16.00"H x 6.00"D	6	
TLXA2206G000	Airpot, 2.2L Red Plastic Exterior, Glass Liner, Lever Handle	16.00"H x 6.00"D	6	
TLXA2501S000	Airpot, 2.5L, SS Exterior/Liner, Lever Handle	13.50"H x 6.00"D	6	
TLXA3001S000	Airpot, 3.0L, SS Exterior/Liner, Lever Handle	14.00"H x 6.00"D	6	
TLXP1901S000	Pourpot, 1.9L, SS Exterior/Liner, Brew-Thru Lid	11.50"H x 5.00"D	6	
TLXP1901S000D	Pourpot, 1.9L, SS Exterior/Liner, Brew-Thru Decaf Lid	11.50"H x 5.00"D	6	
TXSG0101S600	Insulated 1.0 Dispenser, Black Sight Glass, Wide Mouth Lid	20.37" x 9.02" x 14.37	N/A	
TXSG1501S600	Insulated 1.5 Dispenser, Sight Glass, Wide Mouth Lid	22.8" x 9.02" x 14.37	N/A	
TXSG0301S200	Vacuum Sealed 3.0 Dispenser, Stainless Steel Body	23.75" x 14.25" x 16.25"	N/A	
TFT64	64 Oz Thermal Freshtrac™ Carafe, 1 Hour Hold Time	7.04" x 6.56" x 9.26"	N/A	
TFT64D	64 Oz Thermal Freshtrac™ Carafe Decaf, 1 Hour Hold Time	7.04" x 6.56" x 9.26"	N/A	
TFT642H	64 Oz Thermal Freshtrac™ Carafe, 2 Hour Hold Time	7.04" x 6.56" x 9.26"	N/A	
TFT642HD	64 Oz Thermal Freshtrac™ Carafe Decaf, 2 Hour Hold Time	7.04" x 6.56" x 9.26"	N/A	
TFT1G	1.0 Gallon Thermal Freshtrac™ Dispenser, Lockable Base, Wide Mouth Lid	21.13" x 9.13" x 14.38"	N/A	
TFTR1G	1.0 Gallon Thermal Freshtrac™ Dispenser, Lockable Base, Wide Mouth Rear Facing Lid	21.13" x 9.13" x 14.38"	N/A	
TFT1G2	1.0 Gallon Thermal Freshtrac™ Dispenser, without Base, Wide Mouth Lid	12.60" x 9.13" x 13.67"	N/A	
TFT1G3	1.0 Gallon Thermal Freshtrac™ Dispenser, Non-Lockable Base, Wide Mouth Lid	21.13" x 9.13" x 14.38"	N/A	
TFT15G	1.5 Gallon Thermal Freshtrac™ Dispenser, Lockable Base, Wide Mouth Lid	23.13" x 9.13" x 14.38"	N/A	
TFTR15G	1.5 Gallon Thermal Freshtrac™ Dispenser, Lockable Base, Wide Mouth Rear Facing Lid	23.13" x 9.13" x 14.38"	N/A	
TFT15G2	1.5 Gallon Thermal Freshtrac™ Dispenser, without Base, Wide Mouth Lid	15.00" x 9.13" x 13.67"	N/A	
TFT15G3	1.5 Gallon Thermal Freshtrac™ Dispenser, Non-Lockable Base, Wide Mouth Lid	23.13" x 9.13" x 14.38"	N/A	

Pourpot Dispenser Reference Guide

MODEL #	CLXP6401S100	CLXP6401S100D	TFT64/TFT642H	TFT64D/TFT642HD	TLXP1901S000	TLXP1901S000D
CAFE0PP10A000	✓	✓				
D60GT12A000	✓	✓	✓	✓		
TLP					✓	✓

Airpot Dispenser Reference Guide


MODEL #	TLXA2201G000	TLXA2201G000D	TLXA2201S000	TLXA2203G000	TLXA2203S000	TLXA2204G000	TLXA2206G000	TLXA0101S000	TLXA2501S000	TLXA3001S000
CAFE0AP10A000	✓	✓	✓	✓	✓	✓	✓	✓		
D500GT12A000	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
D1000GT12A000	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
TLP									✓	

Airpot Dispenser Reference Guide

MODEL #	TXSG0101S600	TXSG1501S600	TFT1G/TFTR1G	TFT15G/TFTR15G	TFT15G2	TFT1G2	TFT1G3	TFT15G3
TP15S10A1100*	✓	✓	✓	✓	✓	✓	✓	✓
TP15S63A1100*	✓	✓	✓	✓	✓	✓	✓	✓
TP15S10A1500*	✓	✓	✓	✓	✓	✓	✓	✓
TP15S63A1500*	✓	✓	✓	✓	✓	✓	✓	✓
TP1S63A1000	✓	✓	✓	✓	✓	✓	✓	✓
TP1S63A3000	✓	✓	✓	✓	✓	✓	✓	✓
TP1S530A1100*	✓	✓	✓	✓	✓	✓	✓	✓
TP15T10A1100*/G4TP15T10A1500*	✓	✓	✓	✓	✓	✓	✓	✓
TP15T10A1159*	✓	✓	✓	✓	✓	✓	✓	✓
TP15T16A1100*	✓	✓	✓	✓	✓	✓	✓	✓
TP1519A1100*	✓	✓	✓	✓	✓	✓	✓	✓
TP15T10A1500*	✓	✓	✓	✓	✓	✓	✓	✓
TP1T10A1000*	✓	✓	✓	✓	✓	✓	✓	✓
TP1T19A1000*	✓	✓	✓	✓	✓	✓	✓	✓
TP1TT10A3000	✓	✓	✓	✓	✓	✓	✓	✓
G4TP2S63A3100/G4TP2T10A3500/G4TP15S10A1500*	✓	✓	✓	✓	✓	✓	✓	✓
G4TP2T10A3100/G4TP15S63A1500*	✓	✓	✓	✓	✓	✓	✓	✓
G4/G3CBHS/CBHT/CBHS67000-001/CBHT17000-0001		✓		✓				✓
G4TP15T63A3100	✓		✓			✓	✓	
G4TP1T10A3100	✓		✓			✓	✓	

* Comes with ThermoPro Dispensers

WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov



Decanter Dispensers

Crystal Clear Coffee Service

Features at a Glance

- Impact Resistant – Independent testing labs prove Curtis superior. On average proving to be 25% stronger.
- Dimensionally accurate, lab-quality Schott German glass.
- No "O" Rings or Glue Sealants – Patented multi-tooth, non-removable conical interlock mechanism with vinyl sealing gaskets. This provides for long-term performance without the need for sealants or glues to attach the bowl to the handle or degrade and leach into product.
- Robust Polypropylene Handles – Impact resistant, break proof, chemical resistant and dishwasher safe. The extended handle design and ergonomic standoff provide protection from hot glass during gripping, serving tilt and replacement.
- Baked-On Graphics – Logos will not chip, peel or flake.

*Freight prepaid in the continental USA on 360 or more glass decanter dispensers shipped to one location. FOB Broken Arrow, OK
360 Decanters = 15 Cases (24 Decanters per case)*



70280000306

Curtis Glass Decanters are produced from a highly-polished mold, superior materials and finished with a proprietary annealing process. This results in a superior tempered glass bowl with a solid, consistent wall thickness throughout the entire sphere. Curtis Glass Decanter is incredibly break-resistant and sparkling clear.

Our decanters features a sloped handle design and thumb "rest", allowing any size hand to obtain a firm, yet gentle grip. The handle's angle and position have been optimized for easy pouring, regardless of the bowl's volume. And, a little extra room has been added to keep knuckles away from heat.



70580000303



70280200403



CUSTOM BRANDING

Decanter Dispensers

MODEL #	DESCRIPTION	CAPACITY	CASE COUNT	HEIGHT x WIDTH x DEPTH	
70180100306	Black Handle/White Imprint, Logo: Use & Care Instructions Only	64 oz.	24	15.00" x 28.50" x 21.50"	
70280000206	Brown Handle/White Imprint, Logo: Curtis	64 oz.	24	15.00" x 28.50" x 21.50"	
70280000306	Black Handle/White Imprint, Logo: Curtis	64 oz.	24	15.00" x 28.50" x 21.50"	
70280100203	Brown Handle/White Imprint, Logo: Use & Care Instructions Only	64 oz.	3	7.75" x 21.25" x 6.75"	
70280100206	Brown Handle/White Imprint, Logo: Use & Care Instructions Only	64 oz.	24	15.00" x 28.50" x 21.50"	
70280100303	Black Handle/White Imprint, Logo: Use & Care Instructions Only	64 oz.	3	7.75" x 21.25" x 6.75"	
70280200403	Orange Handle/Orange Imprint, Logo: Decaf Only	64 oz.	3	7.75" x 21.25" x 6.75"	
70280200406	Orange Handle/Orange Imprint, Logo: Decaf Only	64 oz.	24	15.00" x 28.50" x 21.50"	

Custom Branding

DESCRIPTION	CAPACITY	CASE COUNT	HEIGHT x WIDTH x DEPTH	
Black Or Brown Handle, Logo: Custom	64 oz.	24	15.00" x 28.50" x 21.50"	
Black Or Brown Handle, Logo: Custom	64 oz.	6	7.75" x 23.00" x 15.25"	
Black Or Brown Handle, Logo: Custom	64 oz.	2 OR 3	7.75" x 21.25" x 6.75"	
Orange Handle, Logo: Custom	64 oz.	24	15.00" x 28.50" x 21.50"	
Orange Handle, Logo: Custom	64 oz.	6	7.75" x 23.00" x 15.25"	
Orange Handle, Logo: Custom	64 oz.	2 OR 3	7.75" x 21.25" x 6.75"	

Pourover Dispenser Reference Guide

MODEL #	70180100306	70280000206	70280000306	70280100203	70280100206	70280100303	70280200403	70280200406
CAFE1DB10A000	✓	✓	✓	✓	✓	✓	✓	✓
CAFE2DB10A000	✓	✓	✓	✓	✓	✓	✓	✓
CAFE3DB10A000	✓	✓	✓	✓	✓	✓	✓	✓

Alpha® Dispenser Reference Guide

MODEL #	70180100306	70280000206	70280000306	70280100203	70280100206	70280100303	70280200403	70280200406
ALP1GT12A000	✓	✓	✓	✓	✓	✓	✓	✓
ALP2GT12A000	✓	✓	✓	✓	✓	✓	✓	✓
ALP3GT12A000	✓	✓	✓	✓	✓	✓	✓	✓
ALP3GT63A000	✓	✓	✓	✓	✓	✓	✓	✓
ALP3GTR12A000	✓	✓	✓	✓	✓	✓	✓	✓
ALP3GTR63A000	✓	✓	✓	✓	✓	✓	✓	✓
ALP3GTL12A000	✓	✓	✓	✓	✓	✓	✓	✓
ALP3GTL63A000	✓	✓	✓	✓	✓	✓	✓	✓
ALP5GT12A000	✓	✓	✓	✓	✓	✓	✓	✓
ALP5GT63A000	✓	✓	✓	✓	✓	✓	✓	✓
ALP6GT63A000	✓	✓	✓	✓	✓	✓	✓	✓
ALP6GTN63A000	✓	✓	✓	✓	✓	✓	✓	✓
ALP1GT32A000	✓	✓	✓	✓	✓	✓	✓	✓
ALP2GT32A000	✓	✓	✓	✓	✓	✓	✓	✓
ALP3GT32A000	✓	✓	✓	✓	✓	✓	✓	✓

WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

Dispenser Included

Dispenser Not Included

Quick Ship

New Product

Special Order

Cord & Plug Included

Dual Voltage

Iced Tea & Iced Coffee Dispensers

Sized to Meet Any Requirement

Features at a Glance

- Heavy Gauge 18.8 Stainless Steel Construction – Completely welded seams for long-lasting durability.
- Standard Welded Handles – For easy lifting.
- Sloped Tank Bottom with Special Front Drain Design – Allows complete waste-proof dispensing with no residue.
- Stainless Steel Faucet Shaft – Integral to the tank virtually eliminates leaks and breakage.
- Great Custom Branding Options – Colorful merchandising label attracts customers or create custom full wraps.

Freight prepaid in the continental USA on 20 or more tea dispensers.



Iced Tea & Iced Coffee Dispensers

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	
TC-2H	2.0 Gallon Round Tea Dispenser	19.00"H x 9.40"D	
TC-3H	3.0 Gallon Round Tea Dispenser	23.00"H x 9.40"D	
TC-3HS	3.0 Gallon Round Tea Dispenser, Short	19.25"H x 9.40"D	
TC-5H*	5.0 Gallon Round Tea Dispenser	28.00"H x 9.40"D	
TC-5H-S	5.0 Gallon Round Tea Dispenser, Short	22.00"H x 9.40"D	
TC-10H*	10.0 Gallon Round Tea Dispenser	31.00"H x 12.75"D	
TC15S	1.5 Gallon Tea Dispenser, Stackable	8.40"H x 9.40"D	
TC15RS	Remote Tea Dispenser Stand, Stackable	9.13"H x 9.40"D	
TC3S	3.0 Gallon Tea Dispenser, Stackable	13.83" x 11.63" x 8.13"	
TCO308A000	3.0 Gallon Tea Dispenser, Oval	9.25" x 11.13" x 15.88"	
TCO417A000	4.0 Gallon Tea Dispenser, Oval	17.75" x 11.13" x 15.88"	
TCO419A000	4.0 Gallon Tea Dispenser, Oval	19.75" x 11.13" x 15.88"	
TCO421A000	4.0 Gallon Tea Dispenser, Oval	21.75" x 11.13" x 15.88"	
TCOC421G000	4.0 Gallon Iced Coffee Dispenser, Oval	21.75" x 11.13" x 15.88"	
TCORS000	Remote Stand For TCO308 Tea Dispenser	9.14" x 9.10" x 13.60"	
TCO308ARS000	3.0 Gallon Tea Dispenser with Remote Stand	18.39" x 11.13" x 15.88"	
TCN	3.5 Gallon Tea Dispenser, Narrow	22.13" x 6.25" x 16.88"	
TCNC	3.5 Gallon Iced Coffee Dispenser, Narrow	22.13" x 6.25" x 16.88"	
TCNV	3.5 Gallon Tea Dispenser, Narrow, EZ View	22.13" x 6.25" x 16.88"	
TCNL	3.5 Gallon Narrow, Lockable Lid	22.13" x 6.25" x 16.88"	
TCN1510	1.5 Gallon Tea Dispenser	9.75" x 6.25" x 16.88"	
TCN14	3.5 Gallon Tea Dispenser, Short	15.13" x 6.25" x 16.88"	
TCNV14	3.5 Gallon Tea Dispenser, Short, EZ View	15.13" x 6.25" x 16.88"	
TCNRS	Tea Dispenser Remote Stand (TCN14 and TCN1510)	7.88" x 7.00" x 14.13"	
TCNRS21A000	Tea Dispenser Remote Two-Tiered Stand (TCN14, TCN1510, TCN)	26.88" x 8.50" x 16.38"	

* Will not fit under brewers. Intended for remote dispensing.

Round Dispenser Reference Guide

MODEL #	TC-2H	TC-3H	TC-3HS	TC-5H
G4/G3 TB*	✓		✓	
G3 TBT*		✓	✓	✓
G4/G3 STB*	✓	✓	✓	✓
G3 CB	✓	✓	✓	✓
G3 CBHS	✓		✓	✓
G4/G3 CBHT		✓		

* Rails need to be purchased separately. Call for details.

Oval Dispenser Reference Guide

MODEL #	TCO308A000	TCO417A000	TCO419A000	TCO421A000	TCOC421G000	TCN	TCNV	TCNC	TCN1510	TCN14	TCNV14	TCNRS	TCNRS21A000
G4/G3 TBP	✓												
G4/G3 TB		✓	✓	✓	✓	✓	✓	✓					
G4/G3 RSTB						✓	✓	✓					
G3 TBT			✓	✓	✓	✓	✓	✓					
G4/G3 STB		✓	✓	✓	✓	✓	✓	✓					
G4/G3 RTB		✓	✓	✓	✓	✓	✓	✓					
G3 CBP	✓												
G3 CB		✓	✓	✓	✓	✓	✓	✓					
G4/G3 CBHS						✓	✓	✓					
G4/G3 CBHT						✓	✓	✓					
G4/G3 TBS									✓	✓	✓	✓	✓



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

Dispenser Included

Dispenser Not Included

Quick Ship

New Product

Special Order

Cord & Plug Included

Dual Voltage

Coffee Grinders

Consistent, Accurate Grind



ILGD-10

■ The Digital InterLock™ Series From Curtis

The ILGD Digital InterLock Coffee Grinder enables users to link the grinder to their brewer for the perfect brew, every time. Specially designed for fresh grind/fresh brew programs, the Curtis Digital InterLock™ System connects compatible Digital Control Coffee Brewers (Gemini® and ThermoPro® Series brewers with 3-Batch option) to ILGD Interlock Coffee Grinder via an interlock cable for simple, error-proof grinding and brewing. With the push of a button, the Grinder automatically conveys the selected grind volume to the brewing system. The brew selection is then “locked-in” to the corresponding grind cycle... incorrect cycles are “locked out.” If both brewer sides are in use, the Grinder’s memory stores the information and waits until a side is available.

Features at a Glance


- Easy to Use - Fully automatic operation.
- Large Grinding Burrs - Provide faster; more efficient operation.
- Highly Accurate and Consistent Throw - For even distribution, dust reduction.
- Constant, uniform grind.
- Powerful 1/2 hp Motor - Equipped with safety circuit breaker.

Coffee Grinders

MODEL #	DESCRIPTION	HOPPER CAPACITY	MOTOR POWER	HEIGHT x WIDTH x DEPTH	
GSG-3BLK	Coffee Grinder Single, Gourmet Black Finish	3.0 lbs.	0.5 HP	26.63" x 7.22" x 15.07"	
SHG-10	Coffee Grinder Single	6.0 lbs.	0.5 HP	21.71" x 10.16" x 14.70"	
SLG-10	Coffee Grinder Single, Low Profile	5.0 lbs.	0.5 HP	20.66" x 8.00" x 14.52"	
ILGD-10	Coffee Grinder Twin, Digital Interlock	7.5 lbs./side	0.5 HP	29.50" x 10.00" x 14.50"	

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL			
				MIN. CIRCUIT	WIRE	WATTS	HERTZ
GSG-3BLK	1 PH	120V	8.0A	15A	2 W+G	960W	50/60 Hz
SHG-10	1 PH	120V	8.0A	15A	2 W+G	960W	50/60 Hz
SLG-10	1 PH	120V	8.0A	15A	2 W+G	960W	50/60 Hz
ILGD-10	1 PH	120V	8.0A	15A	2 W+G	960W	50/60 Hz

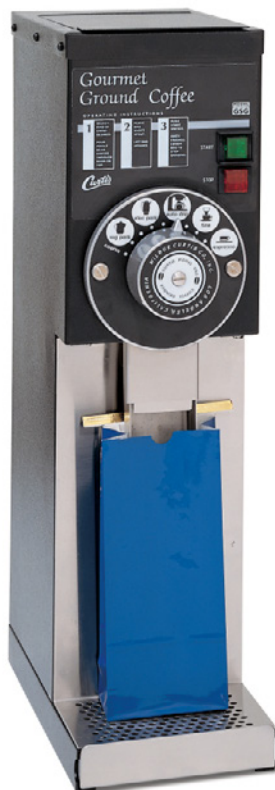

GSG-3BLK



SHG-10



SLG-10



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

Dispenser Included

Dispenser Not Included

Quick Ship

New Product

Special Order

Cord & Plug Included

Dual Voltage

Hot Water Dispensers

Fresh Hot Water



WB2A10



WB5N

■ Curtis Water Dispensers

Perfect for tea, soup, freeze-dried products, cleaning jobs and more!

With the latest in digital technology, these hot water dispensers offer precise control over all critical functions. Curtis' digital water dispensers deliver large volumes of piping hot water right at the preparation site. They are constructed of heavy gauge stainless steel and feature thermostatic controls and solid-state automatic refill systems.

Features at a Glance

- G3 Digital Control Module – Provides precise control of temperature (excludes WB-10 and WB-14).
- Agitation Pump – On-demand aeration improves tea extraction and food flavor (excludes WB-10 and WB-14).
- Easy-To-Operate – Simple graphics for all operating functions and ready lights.
- Energy Savings Mode – 4 hours after last dispense, tank will maintain temperature of 140°F. (excludes WB-10 and WB-14).
- Automatic Refill System – For hot water anytime.

Hot Water Dispensers

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	FILL WEIGHT	GAL/HR	
WB2A10	2.0 Gallon Hot Water Dispenser	23.85" x 8.00" x 14.86"	36.2 lbs.	5.0	
WB5N	Electric with Aerator, 5.0 gal.	25.75" x 7.50" x 24.38"	83.7 lbs.	4.5/15.0	
WB5NL	Electric with Aerator, Lower Faucet, 5.0 gal.	25.75" x 7.50" x 24.38"	83.7 lbs.	4.5/15.0	
WB5NB	Electric with Aerator, Black, Lower Faucet, 5.0 gal.	25.75" x 7.50" x 24.38"	83.7 lbs.	4.5/15.0	
WB5NLB	Electric with Aerator, Black, Lower Faucet, 5.0 gal.	25.75" x 7.50" x 24.38"	83.7 lbs.	4.5/15.0	
WB5GT63000	Electric with Aerator, 5.0 gal.	24.50" x 9.25" x 22.00"	81.0 lbs.	4.5/15.0	
WB5GT19000	Electric with Aerator, 5.0 gal.	24.50" x 9.25" x 22.00"	81.0 lbs.	21.5	

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL					WATER			
				MIN. CIRCUIT	HEATER CONFIG.	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
WB2A10	1PH	120V	13.3A	15A	1 x 1600W	2W+G	1600W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	5.0 Gal.
WB5N	1PH	120/220V	12.5/22.7A	15/30A	2 x 2500W	2W/3W+G	1500/5000W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	5.0 Gal.
WB5NL	1PH	120/220V	12.5/22.7A	15/30A	2 x 2500W	2W/3W+G	1500/5000W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	5.0 Gal.
WB5NB	1PH	120/220V	12.5/22.7A	15/30A	2 x 2500W	2W/3W+G	1500/5000W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	5.0 Gal.
WB5NLB	1PH	120/220V	12.5/22.7A	15/30A	2 x 2500W	2W/3W+G	1500/5000W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	5.0 Gal.
WB5GT63000	1PH	120/220V	12.5/22.7A	15/30A	2 x 2500W	2W/3W+G	1500/5000W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	5.0 Gal.
WB5GT19000	3PH	220V	19.7A	30A	3 x 2500W	4W+G	7500W	50/60 Hz	1/4" Flare	20 - 90 psi	1.0 GPM	5.0 Gal.

• Water filtration solutions for these hot water dispensers can be found on page 98



WB2A10



WB5NL



WB5NB



WB5NLB



WB5GT63000



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

Dispenser Included

Dispenser Not Included

Quick Ship

NEW New Product

Special Order

Cord & Plug Included

DV Dual Voltage

Syrup Warmers

Holds Syrup at the Ideal Serving Temperature







SW-2

Features at a Glance

- Consistent Temperature - Low temperature keeps syrup flavorful.
- No Waste - Gentle sloping bottom for complete dispensing.
- Stainless Steel - Finest quality heavy gauge stainless steel is durable and easy to clean.
- "Syrup Ready" Light – Just fill and turn on. When it's ready, the light glows red.
- Construction – Features smooth welded seams for years of reliable service.

Syrup Warmers

MODEL #	DESCRIPTION	HEIGHT x DEPTH	FILL WEIGHT	FAUCET CLEARANCE
SW-1	1.0 gal. Syrup Warmer	14.00" x 7.00"	14.3 lbs.	4.50"  
SW-2	2.0 gal. Syrup Warmer	16.20" x 9.40"	26.7 lbs.	5.50"  

Utility Requirements

MODEL #	PHASE	VOLTS	ELECTRICAL				
			AMPS	MIN. CIRCUIT	WIRE	WATTS	HERTZ
SW-1	1 PH	120V	0.25A	15A	2 W+G	30W	50/60 Hz
SW-2	1 PH	120V	0.83A	15A	2 W+G	100W	50/60 Hz



SW-1

Curtis Syrup Warmers

Featuring No-Drip, Finger-Tip Servicing

Distinctive Curtis Syrup Warmers make hot syrup service a breeze. Ideal for warming hot cider and mulled wine, too.



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

Decanter Warmers

Designed to Keep Coffee Fresh



■ ALPHA® Decanter Warming Plates






Curtis' ALPHA® Warming Plates are the perfect complement to any ALPHA® or Decanter Brewing System. ALPHA® Warming Plates operate on standard 120VAC power and are available in three space-saving configurations.

AW-2SR-10

Features at a Glance

- Designed to keep coffee hot, fresh and delicious, the warmers are easily located in key traffic areas to create additional coffee service stations.
- AW-1 features a single warmer in a low-profile design.
- AW-2 double warmer in a low-profile, side-by-side design. Each warming plate is individually operated.
- AW-2S two-tiered double warming plate system, designed for narrow counter space requirements. Each warming plate is individually operated.
- AW-3SR three-tiered step-up warming plate system is designed for narrow counter space requirements. Each warming plate is individually operated.

Decanter Warmers

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	
AW-1-10	1 Station Decanter Warmer	2.38" x 6.75" x 8.50"	
AW-2-10	2 Station Decanter Warmer, Low Profile	2.38" x 13.75" x 6.75"	
AW-2S-10	2 Station Decanter Warmer, Step Up	8.25" x 6.75" x 16.75"	
AW-2SR-10	2 Station Decanter Warmer, Step-Up with receptacle	8.25" x 6.75" x 16.75"	
AW-3SR-10	3 Station Decanter Warmer, Step-Up with receptacle	14.04" x 8.00" x 20.93"	

Utility Requirements

MODEL #	PHASE	VOLTS	AMPS	ELECTRICAL			
				MIN. CIRCUIT	WIRE	WATTS	HERTZ
AW-1-10	1 PH	120V	.78A	15A	2W+G	100W	50/60 Hz
AW-2-10	1 PH	120V	1.47A	15A	2W+G	180W	50/60 Hz
AW-2S-10	1 PH	120V	1.47A	15A	2W+G	180W	50/60 Hz
AW-2SR-10	1 PH	120V	1.47A	15A	2W+G	180W	50/60 Hz
AW-3SR-10	1 PH	120V	2.21A	15A	2W+G	270W	50/60 Hz



AW-1-10



AW-2-10



AW-2S-10








AW-3SR-10

WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov






Brew Baskets & Paper Filters

Brew Baskets






Gemini, ThermoPro, Combo High Volume

MODEL #	DESCRIPTION	SHIP WEIGHT	
WC-3417	Brew Basket Assembly with Splash Pocket, Stylized Gemini "Hot Coffee"	1.0 lbs.	
WC-3357	Standard Stainless Steel with Wire Basket	2.0 lbs.	
WC-3422	Brew Basket Assembly with Splash Pocket, Stylized High Volume "Hot Coffee"	2.0 lbs.	
WC-3354	Brew Basket Gourmet Large Capacity	2.0 lbs.	
WC-3366	Brew Basket, Filter Pack 8.77"W	2.0 lbs.	





Decanter Brewer, Airpot, GEM120A

MODEL #	DESCRIPTION	SHIP WEIGHT	
WC-3338	Deluxe Stainless Steel Brew Basket Assembly with Wire Basket	1.0 lbs.	
WC-3338-101	Non-Metal Brew Basket Assembly, Deluxe with Splash Pocket "Hot Coffee"	1.0 lbs.	
WC-3316	Brew Basket Assembly, Standard, Stainless Steel with Wire Basket	2.0 lbs.	
WC-3621-101	Brew Basket Assembly with Splash Pocket Stylized Alpha "Hot Coffee"	1.0 lbs.	
WC-3365	Brew Basket, Filter Pack	1.0 lbs.	



Tea, Combo, Iced Coffee

MODEL #	DESCRIPTION	SHIP WEIGHT	
WC-3398	Brew Basket Assembly, Standard Tea with Blue Splash Guard Pocket	2.0 lbs.	
WC-3422C	Brew Basket Assembly with Tan Splash Pocket Stylized High Volume "Iced Coffee"	2.0 lbs.	
WC-3399	Brew Basket Assembly Tropical Tea with Yellow Splash Pocket Strainer	2.0 lbs.	
WC-3396-101	Brew Basket Assembly Black Rotate STD with Blue Splash Pocket	2.0 lbs.	
WC-3358	Brew Basket Assembly, Stainless Steel with Wire Basket	2.0 lbs.	












Urns, High Volume, Omega

MODEL #	DESCRIPTION	SHIP WEIGHT	
WC-3302	Wire Basket Only RU-150/300	4.0 lbs.	
WC-3303	Wire Basket Only RU-225/600	5.0 lbs.	
WC-3304	Wire Basket Only RU-1000	5.0 lbs.	
WC-33004	Brew Basket Assembly, Omega	4.0 lbs.	

Single Cup

MODEL #	DESCRIPTION	SHIP WEIGHT	
WC-3411	Brew Basket Assembly Seraphim, CGC	1.0 lbs.	
WC-3411-101	Brew Basket Assembly, CGC1	1.0 lbs.	

PAPER FILTERS

MODEL #	DIMENSIONS	CASE COUNT	BREW BASKET COMPATIBILITY	SHIP WEIGHT	
GEM-6	12.50" x 4.00"	500	WC-3417, WC-3357, WC-3358	4.0 lbs.	
GEM-6-101	15.00" x 5.50"	500	WC-3398, WC-3422, WC-3422C, WC-3399, WC-3396-101	5.0 lbs.	
GEM-6-102	12.75" x 5.25"	500	WC-3354	5.0 lbs.	
GEM-6-103	20.00" x 8.00"	500	WC-33004	5.0 lbs.	
CR-10	9.75" x 4.50"	1000	WC-3621-101, WC-3316	4.0 lbs.	
CR-11	10.63" x 4.50"	1000	WC-3316	4.0 lbs.	
CR-12	12.31" x 4.38"	500	WC-3338, WC-3338-101	4.0 lbs.	
UP-3	18.00" x 7.00"	500	WC-3302	11.0 lbs.	
UP-6	21.00" x 9.00"	500	WC-3303	13.0 lbs.	
UP-10	23.00" x 9.00"	500	WC-3304	15.0 lbs.	
CGC4FILTER	#4 4.20" x 4.20"	480	WC-3411, WC-3411-101	2.0 lbs.	



WARNING - This product can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov.

Brew Baskets, Paper Filters & Sprayheads

Gemini® Brewers






G4 1.5 Gallon GEMX™ Brewer G4GEMXSIFT63A1000, G4GEMXTIFT10A1000 G4 1.5 Gallon IntelliFresh® Brewer G4GEMSIF63A1000, G4GEMTIF10A1000 G4 1.5 Gallon Brewer G4GEMS63A1000, G4GEMT10A1000 G4 1.5 Gallon GEMX™ Brewer GEMXSIFT63A1000, GEMXTIFT10A1000 G3 1.5 Gallon IntelliFresh® Brewer GEMSIF10A1000, GEMTIF10A1000 GEMSIF63A1000, GEMSIF10B1000 GEMTIF10B1000	SHIPS WITH			ALSO FITS	
	BREW BASKET	PAPER FILTER	SPRAYHEAD	BREW BASKET	PAPER FILTER
	 WC-3417	 GEM-6 12.50" x 4.00"	 WC-29050 AMBER	 WC-3422	 GEM-6-101 15.00" x 5.50"

G3 1.5 Gallon Brewer GEMSS10A1000 GEMSS63A1000 GEMTS10A1000 GEMTS16A1000 GEMTS19A1000	SHIPS WITH			ALSO FITS	
	BREW BASKET	PAPER FILTER	SPRAYHEAD	BREW BASKET	PAPER FILTER
	 WC-3417	 GEM-6 12.50" x 4.00"	 WC-29050 AMBER	 WC-3422	 GEM-6-101 15.00" x 5.50"
	ALSO FITS				
BREW BASKET	PAPER FILTER	BREW BASKET	PAPER FILTER	BREW BASKET	
 WC-3357	 GEM-6 12.50" x 4.00"	 WC-3354	 GEM-6-102 12.75" x 5.25"	 WC-3366 FILTER PACK	

Gemini® 1.0 - 1.5 Gallon Brewers GEM-120A-10	SHIPS WITH		
	BREW BASKET	PAPER FILTER	SPRAYHEAD
	 WC-3621-101	 CR-10 9.75" x 4.50"	 WC-2936 RED

Brew Baskets, Paper Filters & Sprayheads

Thermal Brewers

G4 ThermoProX® 1.0 Gallon Brewers G4TPX1S63A3100, G4TPX1T10A3100 G4 ThermoPro® 1.0 Gallon Brewers G4TP1S63A3100, G4TP1T10A3100 G4 ThermoProX® 1.5 Gallon Brewers G4TPX2S63A3100, G4TPX2T10A3100 G4 ThermoPro® 1.5 Gallon Brewers G4TP1S63A1500, G4TP1S510A1500 G4TP1T10A1500, G4TP2S63A3100 G4TP2T10A3100, G4TP2T10A3500	SHIPS WITH			ALSO FITS	
	BREW BASKET	PAPER FILTER	SPRAYHEAD	BREW BASKET	PAPER FILTER
	 WC-3417	 GEM-6 12.50" x 4.00"	 WC-29050 AMBER	 WC-3422	 GEM-6-101 15.00" x 5.50"

G3 ThermoProX® 1.5 Gallon Brewers TPX2S63A3100, TPX2T10A3100 G3 ThermoPro® 1.5 Gallon Brewers TP1S510A1100, TP1S563A1100 TP1S510A1500, TP1S563A1500 TP1S1T10A1100, TP1S1T16A1100 TP1S1T19A1100, TP1S1T10A1500	SHIPS WITH			ALSO FITS	
	BREW BASKET	PAPER FILTER	SPRAYHEAD	BREW BASKET	PAPER FILTER
	 WC-3417	 GEM-6 12.50" x 4.00"	 WC-29050 AMBER	 WC-3422	 GEM-6-101 15.00" x 5.50"
	ALSO FITS				
	BREW BASKET	PAPER FILTER	BREW BASKET	PAPER FILTER	BREW BASKET
 WC-3357	 GEM-6 12.50" x 4.00"	 WC-3354	 GEM-6-102 12.75" x 5.25"	 WC-3366 FILTER PACK	

G3 ThermoPro® 1.5 Gallon Brewers TP1S1T10A1159	SHIPS WITH			ALSO FITS	
	BREW BASKET	PAPER FILTER	SPRAYHEAD	BREW BASKET	PAPER FILTER
	 WC-3422	 GEM-6-101 15.00" x 5.50"	 WC-29050 AMBER	 WC-3417	 GEM-6 12.50" x 4.00"
	ALSO FITS				
	BREW BASKET	PAPER FILTER	BREW BASKET	PAPER FILTER	BREW BASKET
 WC-3357	 GEM-6 12.50" x 4.00"	 WC-3354	 GEM-6-102 12.75" x 5.25"	 WC-3366 FILTER PACK	

Brew Baskets, Paper Filters & Sprayheads

Thermal Brewers



G3 ThermoPro® 1.0 Gallon Brewers TP1S63A1000 TP1ST63A3000 TP1T10A1000 TP1T19A1000 TP1TT10A3000	SHIPS WITH			ALSO FITS	
	BREW BASKET	PAPER FILTER	SPRAYHEAD	BREW BASKET	PAPER FILTER
					
WC-3417	GEM-6 12.50" x 4.00"	WC-29050 AMBER	WC-3422	GEM-6-101 15.00" x 5.50"	
ALSO FITS					
BREW BASKET	PAPER FILTER	BREW BASKET	PAPER FILTER	BREW BASKET	
					
WC-3357	GEM-6 12.50" x 4.00"	WC-3354	GEM-6-102 12.75" x 5.25"	WC-3366 FILTER PACK	

Airpot Brewers

G3 Airpot Brewers D500GT12A000 D500GT63A000 D500GTH12A000 D500GTH63A000 D1000GT12A000 D1000GT63A000	SHIPS WITH			ALSO FITS	
	BREW BASKET	PAPER FILTER	SPRAYHEAD	BREW BASKET	PAPER FILTER
					
WC-3316	CR-11 10.63" x 4.50"	WC-29025 PURPLE	WC-3338	CR-12 12.31" x 4.38"	
ALSO FITS					
BREW BASKET	PAPER FILTER	BREW BASKET	PAPER FILTER		
					
WC-3338-101	CR-12 12.31" x 4.38"	WC-3621-101	CR-10 9.75" x 4.50"		


Brew Baskets, Paper Filters & Sprayheads

Airpot Brewers






G3 Airpot Brewers D1000GH13A000 D1000GH62A000	SHIPS WITH			ALSO FITS	
	BREW BASKET	PAPER FILTER	SPRAYHEAD	BREW BASKET	PAPER FILTER
	 WC-3338	 CR-12 12.31" x 4.38"	 WC-29025 PURPLE	 WC-3316	 CR-10 9.75" x 4.50"
	ALSO FITS				
BREW BASKET	PAPER FILTER	BREW BASKETS	PAPER FILTERS		
 WC-3338-101	 CR-12 12.31" x 4.38"	 WC-3621-101	 CR-10 9.75" x 4.50"		
G3 Thermal Decanter Brewers D60GT12A000 D60GT63A000	SHIPS WITH			ALSO FITS	
	BREW BASKET	PAPER FILTER	SPRAY HEAD	BREW BASKET	
	 WC-3316	 CR-10 9.75" x 4.50"	 WC-29025 PURPLE	 WC-3365 FILTER PACK	
G3 Low Profile Airpot Brewers TLP	SHIPS WITH				
	BREW BASKET	PAPER FILTER	SPRAYHEAD		
	 WC-3621-101	 CR-10 9.75" x 4.50"	 WC-29030 ORANGE		
G3 Low Profile Airpot Brewers TLP12A TLP12A19	SHIPS WITH				
	BREW BASKET	PAPER FILTER	SPRAYHEAD		
	 WC-3316	 CR-10 9.75" x 4.50"	 WC-29030 ORANGE		

Brew Baskets, Paper Filters & Sprayheads

Single Cup Brewers





G4 Single Cup Coffee Brewer SERA2B SERA2W CGC	SHIPS WITH										
	BREW BASKET		PAPER FILTER		SPRAYHEAD						
	 WC-3411		 CGC4FILTER 7.50" x 2.50"		 WC-29025 PURPLE		 WC-29065 GRAY				
CGC1	SHIPS WITH										
	BREW BASKET		PAPER FILTER		SPRAYHEAD						
	 WC-3411-101		 WC-3621-101		 CGC4FILTER 7.50" x 2.50"		 CR-10 9.75" x 4.50"		 WC-29025 PURPLE		 WC-29065 GRAY

Decanter Brewers

G3 Alpha® Decanter Brewers ALP1GT12A000, ALP2GT12A000 ALP3GT12A000, ALP3GT63A000 ALP3GTR12A000, ALP3GTR63A000 ALP3GTL12A000, ALP3GTL63A000 ALP5GT12A000, ALP5GT63A000 ALP6GT63A000, ALP6GTN63A000	SHIPS WITH			ALSO FITS	
	BREW BASKET	PAPER FILTER	SPRAYHEAD	BREW BASKET	PAPER FILTER
	 WC-3316	 CR-10 9.75" x 4.50"	 WC-29025 PURPLE	 WC-3621-101	 CR-10 9.75" x 4.50"




Pourover Brewers




Pourover Brewers CAFE0AP10A000 CAFE0PP10A000	SHIPS WITH		
	BREW BASKET	PAPER FILTER	SPRAYHEAD
	 WC-3621-101	 CR-10 9.75" x 4.50"	 WC-29025 PURPLE




Pourover Brewers CAFE1DB10A000 CAFE2DB10A000 CAFE3DB10A000	SHIPS WITH			ALSO FITS
	BREW BASKET	PAPER FILTER	SPRAYHEAD	BREW BASKET
	 WC-3621-101	 CR-10 9.75" x 4.50"	 WC-29025 PURPLE	 WC-3365 FILTER PACK

Brew Baskets, Paper Filters & Sprayheads

High Volume Brewers






Automatic Coffee Urns RU-150-12 RU-150-20 RU-150-35 RU-300-12 RU-300-20 RU-300-35	SHIPS WITH		
	BREW BASKET  WC-3302	PAPER FILTER  UP-3 18.00" x 7.00"	SPRAYHEAD  WC-2907 STAINLESS STEEL

Automatic Coffee Urns RU-225-12 RU-225-20 RU-225-35 RU-600-12 RU-600-20 RU-600-35	SHIPS WITH		
	BREW BASKET  WC-3303	PAPER FILTER  UP-6 21.00" x 9.00"	SPRAYHEAD  WC-2907 STAINLESS STEEL

Automatic Coffee Urns RU-1000-12 RU-1000-20 RU-1000-35	SHIPS WITH		
	BREW BASKET  WC-3304	PAPER FILTER  UP-10 23.00" x 9.00"	SPRAYHEAD  WC-2907 STAINLESS STEEL

G4 Omega 3.0/6.0 Gallon Brewers OMGS OMGT OMGT10 OMGS16 OMGT16	SHIPS WITH		
	BREW BASKET  WC-33004	PAPER FILTER  GEM-6-103 20.00" x 8.00"	SPRAYHEAD  WC-29086 8"

Tea Brewers






G4 & G3 Tea Brewers TBP TB TBT STB	SHIPS WITH			ALSO FITS	
	BREW BASKET  WC-3398	PAPER FILTER  GEM-6-101 15.00" x 5.50"	SPRAYHEAD  WC-29025 PURPLE	BREW BASKET  WC-3399	PAPER FILTER  GEM-6-101 15.00" x 5.50"

G4 & G3 Tea Brewers RTB RSTB	SHIPS WITH		
	BREW BASKET  WC-3396-101	PAPER FILTER  GEM-6-101 15.00" x 5.50"	SPRAYHEAD  WC-29025 PURPLE

Brew Baskets, Paper Filters & Sprayheads

Tea Brewers

G4 & G3 Tea Brewers TBS	SHIPS WITH			
	BREW BASKET	PAPER FILTER	SPRAYHEAD	
	 WC-3398	 GEM-6-101 • 15.00" x 5.50"	 WC-29025 • PURPLE	
ALSO FITS				
BREW BASKET	PAPER FILTER	BREW BASKET	PAPER FILTER	
 WC-3399	 GEM-6-101 • 15.00" x 5.50"	 WC-3358	 GEM-6 • 12.50" x 4.00"	

G3 Tea/Coffee Combo Brewers CBP CB	SHIPS WITH				
	BREW BASKET	PAPER FILTER	SPRAYHEAD	BREW BASKET	PAPER FILTER
	 WC-3417	 GEM-6 • 12.50" x 4.00"	 WC-29025 • PURPLE	 WC-3398	 GEM-6-101 • 15.00" x 5.50"

G4 & G3 High Volume Tea/Coffee Combo Brewers G4CBHS CBHS CBHS67000-001	SHIPS WITH				
	BREW BASKET	PAPER FILTER	SPRAYHEAD	BREW BASKET	PAPER FILTER
	 WC-3417	 GEM-6 • 12.50" x 4.00"	 WC-29050 • AMBER	 WC-3398	 GEM-6-101 • 15.00" x 5.50"
ALSO FITS					
BREW BASKET	PAPER FILTER	BREW BASKET	PAPER FILTER		
 WC-3399	 GEM-6-101 • 15.00" x 5.50"	 WC-3422IC	 GEM-6-101 • 15.00" x 5.50"		

G4 & G3 High Volume Tea/Coffee Combo Brewers G4CBHT CBHT CBHT17000-001	SHIPS WITH				
	BREW BASKET	PAPER FILTER	SPRAYHEAD	BREW BASKET	PAPER FILTER
	 WC-3417	 GEM-6 • 12.50" x 4.00"	 WC-29050 • AMBER	 WC-3398	 GEM-6-101 • 15.00" x 5.50"
ALSO FITS					
BREW BASKET					
 WC-3399			 GEM-6-101 • 15.00" x 5.50"		

CSC Water Filtration Systems

It All Starts with Great Water



CSC5AC00

CURTIS Water Filtration Systems

Curtis Water Filtration Systems are specifically designed for coffee brewing equipment. Advanced HydroBlend™ technology delivers effective scale and corrosion control, and enhanced filtration components provide superior chlorine taste and odor removal for a better tasting gourmet beverage. Plus, Curtis Filters feature an extra large filtration medium which provides proper water flow well past the recommended replacement cycle – eliminating clogged filters and unnecessary service calls.

Specifications

MODEL #	DESCRIPTION	RATED LIFE*	FLOW	SHIP WEIGHT**	SHIP CUBE**	
CSC5AC00 with Head, 5" Filter	Chlorine & Sediment Removal, Scale Prevention	4,000 Gal.	0.8 GPM	11.0 lbs.	1.36 cu. ft.	
CSC5CC00 5" Replacement Cartridge Only	Chlorine & Sediment Removal, Scale Prevention	4,000 Gal.	0.8 GPM	9.0 lbs.	1.36 cu. ft.	
CSC10AC00 with Head, 10" Filter	Chlorine & Sediment Removal, Scale Prevention	10,000 Gal.	1.7 GPM	17.0 lbs.	1.23 cu. ft.	
CSC10CC00 with 10" Replacement Cartridge Only	Chlorine & Sediment Removal, Scale Prevention	10,000 Gal.	1.7 GPM	15.0 lbs.	1.23 cu. ft.	
CSC10AV00 with Head, 10" Vend Filter	Chlorine & Sediment Removal, Scale Prevention/OCS/VEND	10,000 Gal.	1.7 GPM	17.0 lbs.	1.23 cu. ft.	
CSC10CV00 with 10" Vend Replacement Cartridge Only	Chlorine & Sediment Removal, Scale Prevention/OCS/VEND	10,000 Gal.	1.7 GPM	15.0 lbs.	1.23 cu. ft.	
CSC10CF00 with 10" Fibredyne Cartridge Only	Chlorine Removal, Scale Prevention, Extra Sediment Loading	5,000 Gal.	1.0 GPM	15.0 lbs.	1.23 cu. ft.	
CSC15AC00 with Head, 15" Filter	Chlorine & Sediment Removal, Scale Prevention	15,000 Gal.	2.0 GPM	23.0 lbs.	1.69 cu. ft.	
CSC15CC00 with 15" Replacement Cartridge Only	Chlorine & Sediment Removal, Scale Prevention	15,000 Gal.	2.0 GPM	21.0 lbs.	1.69 cu. ft.	

* Rated Life is for chlorine removal. To ensure proper control of scale, filters should be replaced every 6 months.

** Shipping Weight and Cube are per cases of 6.

Water Supply Requirements

WATER CONNECTOR	WATER PRESSURE	TEMP RANGE
3/8" FNPT	35-125 psi	35-100 °F

Features at a Glance

- Simple, small profile filter head installation
- Selection of cartridges to handle any equipment type
- Quick disconnect style cartridge for easy replacement
- Proven HydroBlend™ scale and corrosion control plus chlorine taste and odor removal – Provides better tasting, high quality beverages and reduced equipment maintenance costs



CSC15AC00



CSC10AC00

Airpot Racks & Drip Trays

Remote Serving Made Easy

Airpot Racks

MODEL #	DESCRIPTION	SHIP WEIGHT	SHIP CUBE	
CAR-2T-BLK	2 Position Step Up, Black Finish, Heavy-Duty Solid Airpot Rack	17.0 lbs.	3.11 cu.ft.	
CAR-2-BLK	2 Position, Black Finish, Heavy-Duty Solid Airpot Rack	9.0 lbs.	1.94 cu.ft.	
CAR-3-BLK	3 Position, Black Finish, Heavy-Duty Solid Airpot Rack	12.0 lbs.	2.79 cu.ft.	
CAR-4-BLK	4 Position, Black Finish, Heavy-Duty Solid Airpot Rack	21.0 lbs.	5.32 cu.ft.	
CAR-6-BLK	6 Position, Black Finish, Heavy-Duty Solid Airpot Rack	30.0 lbs.	7.61 cu.ft.	
WR2B0000	2 Position, Wire Airpot Rack with Drip Tray	10.0 lbs.	2.62 cu.ft.	
WR3B0000	3 Position, Wire Airpot Rack with Drip Tray	13.0 lbs.	4.08 cu.ft.	
WR4B0000	4 Position, Wire Airpot Rack with Drip Tray	20.0 lbs.	5.32 cu.ft.	
WR5B0000	5 Position, Wire Airpot Rack with Drip Tray	23.0 lbs.	5.32 cu.ft.	
WR6B0000	6 Position, Wire Airpot Rack with Drip Tray	26.0 lbs.	7.61 cu.ft.	




Drip Trays

MODEL #	DESCRIPTION	SHIP WEIGHT	SHIP CUBE		MODEL #	DESCRIPTION	SHIP WEIGHT	SHIP CUBE	
DT-06	Metal Drip Tray, 6"	NA	NA		DT-18	Metal Drip Tray, 18"	NA	NA	
DT-08	Metal Drip Tray, 8"	NA	NA		DT-20	Metal Drip Tray, 20"	NA	NA	
DTP-08	Plastic Drip Tray, 8"	1.0 lbs.	0.11 cu. ft.		DTP-20	Plastic Drip Tray, 20"	2.0 lbs.	0.74 cu.ft.	
DT-09	Metal Drip Tray, 9"	NA	NA		DT-24	Metal Drip Tray, 24"	4.0 lbs.	0.58 cu.ft.	
DT-13	Metal Drip Tray, 13"	NA	NA		DT-28	Metal Drip Tray, 28"	4.0 lbs.	0.58 cu.ft.	
DTP-13	Plastic Drip Tray, 13"	2.0 lbs.	0.74 cu. ft.		WC-5686	Cup Holder, Octagonal	1.0 lbs.	Envelope	
DT-15	Metal Drip Tray, 15"	NA	NA						



Cleaning Brushes

MODEL #	DESCRIPTION	CASE COUNT	SHIP WEIGHT	SHIP CUBE	
CAB-1	Clean-A-Bowl (Sold by case or individually)	144/Case	8.0 lbs.	1.70 cu. ft.	
JB-1	Java Jug Airpot (Sold by case or individually)	144/Case	10.0 lbs.	2.37 cu. ft.	
WC-3640	Sight Gauge Glass Brush (Sold individually)	NA	Envelope	NA	
WC-36076	Brush, Gauge Glass Milano Server (Sold individually)	NA	Envelope	NA	
WC-36077	Brush, Spiral Nylon CGC (Sold individually)	NA	Envelope	NA	



Flojet

MODEL #	DESCRIPTION	DIMENSIONS (H x W x D)	VOLTS	AMPS	SHIP WEIGHT
WC-1044	Flojet Pump For Bottled Water	2.70" x 5.40" x 8.50"	120V	0.5A	4.5 lbs.

WC-1044

Service Carts for 3.0 Gallon Dispensers

Safe and Secure



OMSCR
Shown With Two TXSG0301S200 3.0 Gallon Dispensers (Dispensers Not Included)

Features at a Glance

- Durable, black textured finish withstands the demands of a foodservice environment
- Right and left hooks hold one or two TXSG0301S200 3.0 gallon dispensers securely in place
- Grooved, non-slip mats for the bottom, middle and top shelves keep items in place while the cart is moving
- Service Carts are available by Special Order only.







OMSCP Pneumatic Wheels



OMSCR Rubber Wheels

Service Carts for 3.0 Gallon Dispensers

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH	
OMSCP	Cart, Service with Pneumatic Tires	35.25" x 36.00" x 20.00"	 
OMSCR	Cart, Service with Rubber Tires	35.25" x 36.00" x 20.00"	 

Specifically Designed to Transport Curtis 3.0 Gallon Servers Safely and Securely

OMSCP Service Carts with industrial 6" pneumatic swivel casters and wheels with brakes are designed for heavy use, low speed, and manually-moved applications. The pneumatic casters provide a cushioned ride with shock absorption and quiet operation over almost any type of terrain. Load Capacity: 300 lbs.

OMSCR Service Carts with heavy-duty 5" swivel polyurethane/rubber wheels with brakes.

Load Capacity: 200 lbs.



OMSCP



OMSCR



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

About Curtis

Brewing Up Quality Since 1941



A SEB Professional brand, Wilbur Curtis is an internationally recognized leader in the design and manufacture of premium commercial coffee and tea brewing systems, and specialty drink dispensers. Our wide variety of innovative equipment is designed to deliver consistently superior coffee and tea while offering ease of operation with minimal maintenance and training.

AN ENVIRONMENTALLY CONSCIOUS COMPANY –

At Curtis, environmental responsibility is not a task but rather a passion. We believe that “Going Green” reaches much deeper than political correctness and marketing spin. Being environmentally responsible has long been entrenched in the culture of Curtis including taking steps to reduce our carbon footprint and protect the environment.

SUSTAINABLE EFFORTS –Because environmental responsibility is a passion of ours it permeates our entire business operation from manufacturing and warehouse improvements to everyday office practices. We truly live the principal of the 3R’s: Reduce, Reuse & Recycle. Below is a sampling of the many ways we live out our commitment to sustainability.

Reduce:

- Energy consumption has been reduced by replacement of fluorescent lighting with light diffusing skylights, as well as motion sensors with auto-off settings for office and factory lighting.
- Paper waste has been reduced by electronic filing and paperless departments.



- Water consumption has been reduced with the installation of waterless urinals, which conserve an average of 150,000 liters of water per year, per urinal.

Reuse:

- All product boxes are made with 100% Post-Consumer corrugated material and printed with soy-based inks.
- Reuse of numerous inbound packaging materials for outbound shipments including air filled bags, Styrofoam packaging and cardboard corner guards.

Recycle:

- Recycling of all scrap metal that cannot be used in our manufacturing.
- Instead of disposing water used to wet-test each brewer, over 1800 liters a day are recycled and reused for testing purposes.

Curtis has also made valiant efforts outside of the three R's to propel the green initiative within our products.

- Using an environmentally-friendly vegetable based oil for machine maintenance.
- Insulated tanks retain heat better and also provide for a quicker recovery.

- Digital heat sensors are used that are more accurate and do not overshoot the desired temperature.
- Energy save mode puts the brewer in a low state of energy consumption.
- Components are AC powered as opposed to DC powered, which requires an energy consuming power supply.

SOLAR PANEL PROJECT

- Installed 3,300 solar panels on roof.
- Panels provide 750,000 watts of power each hour.
- The panels shade the roof, reducing the surface temperature significantly. As a result, we experience a 10°F. drop in the factory's air temperature, which provides a cooler work environment on hot days.

Product Warranty

Wilbur Curtis Co., Inc. certifies that its products are free from defects in material and workmanship under normal use. The following limited warranties and conditions apply:

- 3 years, parts and labor, from original date of purchase on digital control boards
- 2 years, parts, from original date of purchase on all other electrical components, fittings and tubing
- 1 year, labor, from original date of purchase on all other electrical components, fittings and tubing

Additionally, Wilbur Curtis Co., Inc. warrants its grinding burrs for four (4) years from the date of purchase. Stainless steel components are warranted for two (2) years from the date of purchase against leaking or pitting. Replacement parts are warranted for ninety (90) days from the date of purchase or for the remainder of the limited warranty period of the equipment in which the component is installed.

All in-warranty service calls must have prior authorization. For authorization, call the Technical Support Department at 800-995-0417. Additional conditions may apply. Go to www.wilburcurtis.com to view the full product warranty information.

CONDITIONS & EXCEPTIONS

The warranty covers original equipment at time of purchase only. Wilbur Curtis Co., Inc., assumes no responsibility for substitute replacement parts installed on Curtis equipment that have not been purchased from Wilbur Curtis Co., Inc. Wilbur Curtis Co., Inc. will not accept any responsibility if the following conditions are not met. The warranty does not cover:

Adjustments and cleaning: The resetting of safety thermostats and circuit breakers, programming and temperature adjustments are the responsibility of the equipment owner. The owner is responsible for proper cleaning and regular maintenance of this equipment.

Replacement of items subject to normal use and wear: This shall include, but is not limited to, spray heads, faucets, light bulbs, shear disks, "O" rings, gaskets, silicone tubing, silicone elbows, canister assemblies, whipper chambers and plates, mixing bowls, agitation assemblies and whipper propellers.

The warranty is void under the following circumstances:

- **Improper operation of equipment:** The equipment must be used for its designed and intended purpose and function.
- **Improper installation of equipment:** This equipment must be installed by a professional technician and must comply with all local electrical, mechanical and plumbing codes.
- **Improper voltage:** Equipment must be installed at the voltage stated on the serial plate supplied with this equipment.
- **Improper water supply:** This includes, but is not limited to, excessive or low water pressure and inadequate or fluctuating water flow rate.
- **Damaged in transit:** Equipment damaged in transit is the responsibility of the freight company and a claim should be made with the carrier.
- **Abuse or neglect (including failure to periodically clean or remove lime accumulations):** The manufacturer is not responsible for variation in equipment operation due to excessive lime or local water conditions. The equipment must be maintained according to the manufacturer's recommendations.
- **Unauthorized repair or modification:** This equipment must be serviced only by qualified service technicians, using factory specified parts to factory specifications.
- **Modified/Missing Serial Tag:** The serial number label (tag) must not be defaced or removed.

Repairs and/or Replacements are subject to Curtis' decision that the workmanship or parts were faulty and the defects showed up under normal use. All labor shall be performed during regular working hours. Overtime charges are the responsibility of the owner. Charges incurred by delays, waiting time, or operating restrictions that hinder the service technician's ability to perform service is the responsibility of the owner of the equipment. This includes institutional and correctional facilities. Wilbur Curtis Co., Inc. will allow up to 100 miles, round trip, per in-warranty service call.

Return Merchandise Authorization (RMA): All claims under this warranty must be submitted to the Wilbur Curtis Technical Support Department prior to performing any repair work or return of this equipment to the factory. All returned equipment must be properly re-packaged in the original carton and received by Curtis within 45 days following the issuance of a RMA. No units will be accepted if they are damaged in transit due to improper packaging. **NO UNITS OR PARTS WILL BE ACCEPTED WITHOUT A RETURN MERCHANDISE AUTHORIZATION (RMA). THE RMA NUMBER MUST BE MARKED ON THE CARTON OR SHIPPING LABEL.** All warranty claims must be submitted within 60 days of service. Invoices will not be processed or accepted without a RMA number. Any defective parts must be returned in order for warranty invoices to be processed and approved. All in-warranty service calls must be performed by an authorized service agent. Call the Wilbur Curtis Technical Support Department to find an agent near you.

Terms of Sale

APPROVAL – Orders subject to approval from Montebello, CA office with prices, terms and specifications prevailing at time of shipment.

LOSS OR DAMAGE – If merchandise is lost or damaged in transit, purchaser must make claim directly with carrier. Concealed damage or shortage: Merchandise must be unpacked and inspected within 10 days of receipt. Any shortage or damage should be reported to transportation company immediately.

RETURNS – Any merchandise returned for credit or exchange must have an Return Merchandise Authorization (RMA) number from our factory (800) 995-0417. All returns must be returned prepaid. Returned merchandise is subject to a handling charge. All cartons to be marked with RMA number. Equipment should be properly packed in their original cartons. Equipment damaged in transit will not be accepted. All returns are subject to a 20% restocking fee.

TERMS – 1%-15 days, net 30 days.

MINIMUM BILLING – \$25.00, on approved credit

FREIGHT POLICY – Freight F.O.B. Montebello, California

FOR CUSTOMER SERVICE – (6:00am - 4:00pm PST)

Toll Free: 800-421-6150 - Option 1

Local: 323-837-2300 - Option 1

Fax: 323-837-2406

CSRAssistance@WilburCurtis.com

WILL CALL – 9:00am - 4:00pm PST

PRICES SUBJECT TO CHANGE WITHOUT NOTICE



Product specifications subject to change without notice. Call your sales representative for latest specifications.

Shipping Dimensions & Weights

Shipping charges are based on box dimensions. Shipments weighing over 100 lbs. will be shipped via an LTL Freight Carrier. Shipments weighing less than 100 lbs. will be shipped via FedEx or UPS. Class 125 – Large Equipment • Class 100 – Small Equipment • Class 77 – Glass Decanters

Curtis Nitro Infuser

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
NIB 1	6.00" x 8.00" x 12.00"	5.00 lbs.	0.33 cu. ft.
NIB 2	6.00" x 8.00" x 12.00"	5.00 lbs.	0.33 cu. ft.
NIB 3	6.00" x 8.00" x 12.00"	5.00 lbs.	0.33 cu. ft.

G4 Seraphim® Single Cup Coffee Brewers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
SERA2B	Ships in Multiple Boxes	82.00 lbs.	12.0 cu. ft.
SERA2W	Ships in Multiple Boxes	82.00 lbs.	12.0 cu. ft.

G4 CGC Single Cup Coffee Brewers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
CGC	23.00" x 16.00" x 25.00"	34.00 lbs.	5.32 cu. ft.
CGC1	23.00" x 16.00" x 25.00"	34.00 lbs.	5.32 cu. ft.

G4 GEM X Gemini® IntelliFresh® 1.5 Gallon Brewers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
G4GEMXSIFT63A1000	31.87" x 10.50" x 22.68"	51.00 lbs.	7.00 cu. ft.
G4GEMXTIFT10A1000	31.87" x 18.17" x 22.69"	85.00 lbs.	10.85 cu. ft.

G4 Gemini® 1.5 Gallon Brewers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
G4GEMS63A1000	31.00" x 15.00" x 25.00"	51.00 lbs.	7.00 cu. ft.
G4GEMT10A1000	30.00" x 25.00" x 25.00"	85.00 lbs.	10.85 cu. ft.

G3 GEM X Gemini® IntelliFresh® 1.5 Gallon Brewers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
GEMXSIFT63A1000	31.87" x 10.50" x 22.68"	51.00 lbs.	7.00 cu. ft.
GEMXTIFT10A1000	31.87" x 18.17" x 22.69"	85.00 lbs.	10.85 cu. ft.

G3 Gemini® 1.5 Gallon Brewers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
GEMSS10A1000	31.00" x 15.00" x 25.00"	51.00 lbs.	7.00 cu. ft.
GEMSS63A1000	31.00" x 15.00" x 25.00"	51.00 lbs.	7.00 cu. ft.
GEMTS10A1000	30.00" x 25.00" x 25.00"	85.00 lbs.	10.85 cu. ft.
GEMTS16A1000	30.00" x 25.00" x 25.00"	93.00 lbs.	10.85 cu. ft.
GEMTS19A1000	30.00" x 25.00" x 25.00"	85.00 lbs.	10.85 cu. ft.

Gemini® 1.0 & 1.5 Gallon Brewers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
GEM-120A-10	31.00" x 15.00" x 25.00"	43.00 lbs.	7.00 cu. ft.
GEM-120A-63	31.00" x 15.00" x 25.00"	43.00 lbs.	7.00 cu. ft.
GEM-12D-10	30.00" x 25.00" x 25.00"	85.00 lbs.	10.85 cu. ft.

G4 ThermoProX® 1.5 Gallon Brewers*

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
G4TPX2S63A3100	36.00" x 17.00" x 26.00"	53.00 lbs.	9.70 cu. ft.
G4TPX2T10A3100	36.00" x 25.00" x 25.00"	75.00 lbs.	14.08 cu. ft.

G4 ThermoPro® 1.5 Gallon Brewers*

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
G4TP15S10A1500	Ships in Multiple Boxes	75.00 lbs.	14.08 cu. ft.
G4TP15S63A1500	Ships in Multiple Boxes	75.00 lbs.	14.00 cu. ft.
G4TP2S63A3100	37.00" x 18.00" x 25.00"	53.00 lbs.	9.70 cu. ft.
G4TP15T10A1500	Ships in Multiple Boxes	105.00 lbs.	22.00 cu. ft.
G4TP2T10A3100	37.00" x 26.00" x 26.00"	75.00 lbs.	14.08 cu. ft.
G4TP2T10A3500	37.00" x 26.00" x 26.00"	75.00 lbs.	14.08 cu. ft.
TXSG1501S600	28.00" x 13.00" x 18.00"	16.00 lbs.	3.80 cu. ft.

* Dispenser(s) ship in separate box(es)

G4 ThermoProX® 1.0 Gallon Brewers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
G4TPX1S63A3100	30.00" x 16.00" x 25.00"	44.00 lbs.	7.67 cu. ft.
G4TPX1T10A3100	30.00" x 25.00" x 26.00"	75.00 lbs.	10.85 cu. ft.

G4 ThermoPro® 1.0 Gallon Brewers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
G4TP1S63A3100	30.00" x 17.00" x 26.00"	44.00 lbs.	7.67 cu. ft.
G4TP1T10A3100	36.00" x 26.00" x 26.00"	75.00 lbs.	14.08 cu. ft.
G4TP1S63W3100	30.00" x 17.00" x 26.00"	44.00 lbs.	7.67 cu. ft.
G4TP1S63B3100	30.00" x 17.00" x 26.00"	44.00 lbs.	7.67 cu. ft.
G4TP1T10W3100	36.00" x 26.00" x 26.00"	75.00 lbs.	14.08 cu. ft.
G4TP1T10B3100	36.00" x 26.00" x 26.00"	75.00 lbs.	14.08 cu. ft.
TXSG0101S600	28.00" x 13.00" x 18.00"	15.00 lbs.	3.80 cu. ft.

G3 ThermoProX® 1.5 Gallon Brewers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
TPX2S63A3100	36.00" x 17.00" x 25.00"	44.00 lbs.	7.67 cu. ft.
TPX2T10A3100	36.00" x 26.00" x 26.00"	75.00 lbs.	10.85 cu. ft.

G3 ThermoPro® 1.5 Gallon Brewers*

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
TP15S10A1100	Ships in Multiple Boxes	53.00 lbs.	13.13 cu. ft.
TP15S63A1100	Ships in Multiple Boxes	53.00 lbs.	13.13 cu. ft.
TP15S10A1500	Ships in Multiple Boxes	53.00 lbs.	13.13 cu. ft.
TP15S63A1500	Ships in Multiple Boxes	53.00 lbs.	13.13 cu. ft.
TP15T10A1100	Ships in Multiple Boxes	105.00 lbs.	22.00 cu. ft.
TP15T10A1159	Ships in Multiple Boxes	105.00 lbs.	22.00 cu. ft.
TP15T16A1100	Ships in Multiple Boxes	110.00 lbs.	22.00 cu. ft.
TP15T19A1100	Ships in Multiple Boxes	110.00 lbs.	22.00 cu. ft.
TP15T10A1500	Ships in Multiple Boxes	105.00 lbs.	22.00 cu. ft.
TP15S10A5100	Ships in Multiple Boxes	53.00 lbs.	13.13 cu. ft.
TP15T10A5100	Ships in Multiple Boxes	105.00 lbs.	22.00 cu. ft.
TXSG1501S600	28.00" x 13.00" x 18.00"	16.00 lbs.	3.80 cu. ft.

* Dispenser(s) ship in separate box(es)

G3 ThermoPro® 1.0 Gallon Brewers*

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
TP1S63A1000	Ships in Multiple Boxes	55.00 lbs.	9.70 cu. ft.
TP1ST63A3000	15.00" x 26.00" x 43.00"	44.00 lbs.	9.70 cu. ft.
TP1T10A1000	Ships in Multiple Boxes	60.00 lbs.	14.08 cu. ft.
TP1T19A1000	Ships in Multiple Boxes	68.00 lbs.	14.08 cu. ft.
TP1TT10A3000	42.00" x 26.00" x 26.00"	66.00 lbs.	16.43 cu. ft.
TXSG0101S600	28.00" x 13.00" x 18.00"	15.00 lbs.	3.80 cu. ft.

* Dispenser(s) ship in separate box(es)

G3 Airpot Brewers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
D500GT12A000	30.00" x 14.00" x 23.00"	34.00 lbs.	2.21 cu. ft.
D500GT63A000	30.00" x 14.00" x 23.00"	34.00 lbs.	2.21 cu. ft.
D500GTH12A000	34.00" x 14.00" x 23.00"	35.00 lbs.	2.21 cu. ft.
D500GTH63A000	34.00" x 14.00" x 23.00"	35.00 lbs.	2.21 cu. ft.
D1000GT12A000	30.00" x 22.00" x 23.00"	53.00 lbs.	8.78 cu. ft.
D1000GT63A000	30.00" x 22.00" x 23.00"	53.00 lbs.	8.78 cu. ft.
D1000GH13A000	34.00" x 22.00" x 23.00"	59.00 lbs.	8.78 cu. ft.
D1000GH62A000	34.00" x 22.00" x 23.00"	60.00 lbs.	8.78 cu. ft.

G3 Thermal Decanter Brewers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
D60GT12A000	22.00" x 14.00" x 22.00"	29.00 lbs.	3.92 cu. ft.
D60GT63A000	22.00" x 14.00" x 22.00"	30.00 lbs.	3.92 cu. ft.

G3 Low Profile Airpot Brewers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
TLP12A	22.00" x 14.00" x 22.00"	29.00 lbs.	3.92 cu. ft.
TLP	22.00" x 14.00" x 22.00"	29.00 lbs.	3.92 cu. ft.
TLP12A19	22.00" x 14.00" x 22.00"	29.00 lbs.	3.92 cu. ft.

G3 Alpha® Decanter Brewers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
ALP1GT12A000	22.00" x 14.00" x 22.00"	29.00 lbs.	3.92 cu. ft.
ALP2GT12A000	22.00" x 14.00" x 22.00"	30.00 lbs.	3.92 cu. ft.
ALP3GT12A000	22.00" x 14.00" x 22.00"	31.00 lbs.	3.92 cu. ft.
ALP3GT63A000	22.00" x 14.00" x 22.00"	31.00 lbs.	3.92 cu. ft.
ALP3GTR12A000	23.00" x 21.00" x 24.00"	38.00 lbs.	6.70 cu. ft.
ALP3GTR63A000	23.00" x 21.00" x 24.00"	38.00 lbs.	6.70 cu. ft.
ALP3GTL12A000	23.00" x 21.00" x 24.00"	38.00 lbs.	6.70 cu. ft.
ALP3GTL63A000	23.00" x 21.00" x 24.00"	38.00 lbs.	6.70 cu. ft.
ALP5GT12A000	22.00" x 28.00" x 23.00"	44.00 lbs.	8.20 cu. ft.
ALP5GT63A000	22.00" x 28.00" x 23.00"	45.00 lbs.	8.20 cu. ft.
ALP6GT63A000	22.00" x 38.00" x 24.00"	72.00 lbs.	11.61 cu. ft.
ALP6GTN63A000	24.00" x 26.00" x 24.00"	60.00 lbs.	8.67 cu. ft.

Pourover Brewers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
CAFE0AP10A000	30.00" x 14.00" x 23.00"	31.00 lbs.	5.59 cu. ft.
CAFE0PP10A000	22.00" x 14.00" x 22.00"	23.00 lbs.	3.92 cu. ft.
CAFE1DB10A000	22.00" x 14.00" x 22.00"	24.00 lbs.	3.92 cu. ft.
CAFE2DB10A000	22.00" x 14.00" x 22.00"	25.00 lbs.	3.92 cu. ft.
CAFE3DB10A000	22.00" x 21.00" x 23.00"	32.00 lbs.	6.14 cu. ft.

Automatic Coffee Urns

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
RU-150-12	27.00" x 24.00" x 31.00"	78.00 lbs.	11.62 cu. ft.
RU-150-20	27.00" x 24.00" x 31.00"	78.00 lbs.	11.62 cu. ft.
RU-225-12	30.00" x 32.00" x 24.00"	85.00 lbs.	13.33 cu. ft.
RU-225-20	30.00" x 32.00" x 24.00"	85.00 lbs.	13.33 cu. ft.
RU-300-12	30.00" x 21.00" x 38.00"	95.00 lbs.	13.85 cu. ft.
RU-300-20	30.00" x 21.00" x 38.00"	95.00 lbs.	13.85 cu. ft.
RU-600-12	31.00" x 24.00" x 45.00"	120.00 lbs.	19.37 cu. ft.
RU-600-20	31.00" x 24.00" x 45.00"	120.00 lbs.	19.37 cu. ft.
RU-1000-12	38.00" x 24.00" x 45.00"	146.00 lbs.	23.74 cu. ft.
RU-1000-20	38.00" x 24.00" x 45.00"	146.00 lbs.	23.74 cu. ft.

G4 Omega 3.0/6.0 Gallon Brewers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
OMGS	43.00" x 28.08" x 27.00"	90.00 lbs.	16.00 cu. ft.
OMGS16	43.00" x 28.08" x 27.00"	90.00 lbs.	16.00 cu. ft.
OMGT	44.00" x 43.00" x 28.00"	160.00 lbs.	30.66 cu. ft.
OMGT10	44.00" x 43.00" x 28.00"	160.00 lbs.	30.66 cu. ft.
OMGT16	44.00" x 43.00" x 28.00"	160.00 lbs.	30.66 cu. ft.

Cold Brew Coffee Systems

MODEL #	HEIGHT x WIDTH x DEPTH	SHIP WEIGHT	SHIP CUBE
TC-6H	21.00" x 14.00" x 14.00"	14.0 lbs.	2.38 cu. ft.
TC-7H	21.00" x 14.00" x 14.00"	15.0 lbs.	2.38 cu. ft.
TC-6HK KIT	Ships in Multiple Boxes	13.0 lbs.	2.50 cu. ft.
TC-7HK KIT	Ships in Multiple Boxes	13.0 lbs.	2.50 cu. ft.

Shipping Dimensions & Weights

G4 Tea Brewers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
G4TBS	39.00" x 15.00" x 22.00"	33.00 lbs.	6.28 cu. ft.
G4TBP	30.00" x 16.00" x 27.00"	47.00 lbs.	7.50 cu. ft.
G4TB	39.00" x 15.00" x 27.00"	41.00 lbs.	9.14 cu. ft.
G4STB	39.00" x 15.00" x 27.00"	48.00 lbs.	9.14 cu. ft.
G4RTB	38.00" x 15.00" x 27.00"	41.00 lbs.	9.14 cu. ft.
G4RSTB	38.00" x 15.00" x 27.00"	48.00 lbs.	9.14 cu. ft.
G4CB	34.25" x 10.13" x 22.88"	44.00 lbs.	9.14 cu. ft.
G4CBHS	44.00" x 14.00" x 26.00"	47.00 lbs.	9.14 cu. ft.
G4CBHT	41.00" x 26.00" x 26.00"	44.00 lbs.	9.14 cu. ft.

G3 Tea Brewers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
TBS	39.00" x 15.00" x 22.00"	41.00 lbs.	9.14 cu. ft.
TBP	30.00" x 16.00" x 27.00"	47.00 lbs.	7.50 cu. ft.
TB	39.00" x 15.00" x 27.00"	41.00 lbs.	9.14 cu. ft.
TBT	43.00" x 15.00" x 26.00"	43.00 lbs.	9.70 cu. ft.
STB	39.00" x 15.00" x 27.00"	48.00 lbs.	9.14 cu. ft.
RTB	38.00" x 15.00" x 27.00"	41.00 lbs.	8.91 cu. ft.
RSTB	38.00" x 15.00" x 27.00"	41.00 lbs.	8.91 cu. ft.

G3 Tea/Coffee Combo Brewers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
CBP	31.00" x 15.00" x 26.00"	46.00 lbs.	7.00 cu. ft.
CB	39.00" x 15.00" x 27.00"	44.00 lbs.	9.14 cu. ft.
CBHS/CBHS67000-001	44.00" x 14.00" x 26.00"	47.00 lbs.	9.27 cu. ft.
CBHT/CBHT17000-001	41.00" x 26.00" x 26.00"	76.00 lbs.	16.04 cu. ft.

Liquid Iced Tea/Coffee Dispensers

MODEL #	HEIGHT x WIDTH x DEPTH	SHIP WEIGHT	SHIP CUBE
TCC1	29.00" x 16.00" x 23.00"	20.00 lbs.	6.18 cu. ft.
TCC1N	26.00" x 11.00" x 24.00"	21.00 lbs.	3.97 cu. ft.
TCC2	29.00" x 16.00" x 23.00"	21.00 lbs.	6.18 cu. ft.
TCC2N	26.00" x 11.00" x 24.00"	22.00 lbs.	3.97 cu. ft.
TCC2S	16.00" x 21.00" x 23.00"	14.00 lbs.	4.47 cu. ft.
TCC3	29.00" x 16.00" x 23.00"	22.00 lbs.	6.18 cu. ft.
TCC3N	29.00" x 16.00" x 23.00"	23.00 lbs.	6.18 cu. ft.
TCC3S	16.00" x 21.00" x 22.00"	15.00 lbs.	4.28 cu. ft.
TCC1C	29.00" x 16.00" x 23.00"	20.00 lbs.	6.18 cu. ft.

Chill-X Frozen Beverage Machine

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
CFBX2	18.00" x 21.00" x 39.00"	132.00 lbs.	10.69 cu. ft.

Primo Cappuccino

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
PCGT3	44.00" x 25.00" x 34.00"	125.00 lbs.	21.64 cu. ft.
PCGT3DV	44.00" x 25.00" x 34.00"	125.00 lbs.	21.64 cu. ft.
PCGT3300	44.00" x 25.00" x 34.00"	125.00 lbs.	21.64 cu. ft.
PCGT3700	44.00" x 25.00" x 34.00"	125.00 lbs.	21.64 cu. ft.
PCGT3800	44.00" x 25.00" x 34.00"	125.00 lbs.	21.64 cu. ft.
PCGT3900	44.00" x 25.00" x 34.00"	125.00 lbs.	21.64 cu. ft.

Primo Cappuccino (continued)

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
PCGT4	44.00" x 25.00" x 36.00"	147.00 lbs.	22.92 cu. ft.
PCGT4300	44.00" x 25.00" x 36.00"	147.00 lbs.	22.92 cu. ft.
PCGT5	44.00" x 25.00" x 36.00"	160.00 lbs.	22.92 cu. ft.
PCGT5DV	44.00" x 25.00" x 36.00"	160.00 lbs.	22.92 cu. ft.
PCGT5300	44.00" x 25.00" x 36.00"	160.00 lbs.	22.92 cu. ft.
PCGT5800	44.00" x 25.00" x 36.00"	160.00 lbs.	22.92 cu. ft.
PCGT6	44.00" x 25.00" x 36.00"	160.00 lbs.	22.92 cu. ft.
PCGT6300	44.00" x 25.00" x 36.00"	160.00 lbs.	22.92 cu. ft.

Cafe Primo Cappuccino Systems

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
CAFEP1CS10000	34.00" x 16.00" x 30.00"	58.00 lbs.	9.44 cu. ft.
CAFEP2CS10000	34.00" x 16.00" x 30.00"	63.00 lbs.	9.44 cu. ft.
CAFEP3CS10000	33.38" x 17.75" x 26.13"	73.00 lbs.	8.96 cu. ft.
CAFEP3CS10900	33.38" x 17.75" x 26.13"	73.00 lbs.	8.96 cu. ft.
CAFEP4CS10000	34.00" x 27.00" x 21.00"	84.00 lbs.	11.16 cu. ft.

Cafe Primo Cappuccino with Lightbox

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
CAFEP1CL10000	34.00" x 16.00" x 30.00"	59.00 lbs.	9.44 cu. ft.
CAFEP2CL10000	34.00" x 16.00" x 30.00"	64.00 lbs.	9.44 cu. ft.
CAFEP3CL10000	33.38" x 17.75" x 26.13"	76.00 lbs.	8.96 cu. ft.
CAFEP4CL10000	34.00" x 27.00" x 21.00"	86.00 lbs.	11.16 cu. ft.

Gemini® Satellite Dispensers & Warmers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
GEM-3	14.00" x 12.00" x 14.00"	11.00 lbs.	1.36 cu. ft.
GEM-3D	14.00" x 12.00" x 14.00"	11.00 lbs.	1.36 cu. ft.
GEM-3-5	25.00" x 10.00" x 15.00"	19.00 lbs.	2.17 cu. ft.
GEM-5	14.00" x 12.00" x 14.00"	8.00 lbs.	1.36 cu. ft.
GEM3IF	14.00" x 12.00" x 14.00"	11.00 lbs.	1.36 cu. ft.
GEM5IF	14.00" x 12.00" x 14.00"	8.00 lbs.	1.36 cu. ft.
GEM5IFT	13.00" x 15.00" x 19.00"	15.00 lbs.	2.25 cu. ft.
GEM3XIFT	11.42" x 9.04" x 13.85"	11.00 lbs.	1.36 cu. ft.
GEM5XSIFT	14.00" x 12.00" x 14.00"	8.00 lbs.	0.77 cu. ft.
GEM5XTIFT	13.00" x 15.00" x 19.00"	13.00 lbs.	1.55 cu. ft.

Thermal Dispensers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
CLXP6401S100	10.00" x 17.00" x 22.00"	16.00 lbs.	1.95 cu. ft.
CLXP6401S100D	10.00" x 17.00" x 22.00"	16.00 lbs.	1.95 cu. ft.
TLXA0101S000 (6 pcs)	18.00" x 23.00" x 20.00"	37.00 lbs.	4.79 cu. ft.
TLXA2201G000 (6 pcs)	18.00" x 14.00" x 20.00"	29.00 lbs.	2.92 cu. ft.
TLXA2201G000D (6 pcs)	18.00" x 14.00" x 20.00"	29.00 lbs.	2.92 cu. ft.
TLXA2201S000 (6 pcs)	18.00" x 14.00" x 20.00"	30.00 lbs.	2.92 cu. ft.
TLXA2203G000 (6 pcs)	18.00" x 14.00" x 20.00"	29.00 lbs.	2.92 cu. ft.
TLXA2203G000D (6 pcs)	18.00" x 14.00" x 20.00"	29.00 lbs.	2.92 cu. ft.
TLXA2203S000 (6 pcs)	18.00" x 14.00" x 20.00"	30.00 lbs.	2.92 cu. ft.
TLXA2204G000 (6 pcs)	18.00" x 14.00" x 20.00"	29.00 lbs.	2.92 cu. ft.
TLXA2206G000 (6 pcs)	18.00" x 14.00" x 20.00"	29.00 lbs.	2.92 cu. ft.
TLXA2501S000 (6 pcs)	15.00" x 19.00" x 23.00"	32.00 lbs.	3.79 cu. ft.

Thermal Dispensers (continued)

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
TLXA3001S000 (6 pcs)	16.00" x 20.00" x 11.00"	35.00 lbs.	2.03 cu. ft.
TLXP1901S000 (6 pcs)	13.00" x 13.00" x 18.00"	17.00 lbs.	1.76 cu. ft.
TLXP1901S000D (6 pcs)	13.00" x 13.00" x 18.00"	17.00 lbs.	1.76 cu. ft.
TXSG0101S600	28.00" x 13.00" x 18.00"	15.00 lbs.	3.80 cu. ft.
TXSG1501S600	28.00" x 13.00" x 18.00"	16.00 lbs.	3.80 cu. ft.
TXSG0301S200	19.00" x 18.00" x 27.00"	29.00 lbs.	5.34 cu. ft.
TFT64 /TFT642H	9.00" x 11.00"	4.00 lbs.	1.25 cu. ft.
TFT64D/TFT642HD	9.00" x 11.00"	4.00 lbs.	1.25 cu. ft.
TFT1G/TFT1G3	28.00" x 13.00" x 18.00"	15.00 lbs.	3.80 cu. ft.
TFT15G/TFT15G3	28.00" x 13.00" x 18.00"	16.00 lbs.	3.80 cu. ft.

Decanter Dispensers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
70180100306	15.00" x 22.00" x 28.00"	1.34 lbs.	5.34 cu. ft.
70280000206	15.00" x 22.00" x 28.00"	1.34 lbs.	5.34 cu. ft.
70280000306	15.00" x 22.00" x 28.00"	1.34 lbs.	5.34 cu. ft.
70280100203	15.00" x 22.00" x 28.00"	1.34 lbs.	5.34 cu. ft.
70280100206	15.00" x 22.00" x 28.00"	1.34 lbs.	5.34 cu. ft.
70280100303	15.00" x 22.00" x 28.00"	1.34 lbs.	5.34 cu. ft.
70280200403	15.00" x 22.00" x 28.00"	1.34 lbs.	5.34 cu. ft.
70280200406	15.00" x 22.00" x 28.00"	1.34 lbs.	5.34 cu. ft.
70580000303	15.00" x 22.00" x 28.00"	1.34 lbs.	5.34 cu. ft.
70580000203	15.00" x 22.00" x 28.00"	1.34 lbs.	5.34 cu. ft.

Iced Tea & Iced Coffee Dispensers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
TC-2H	19.00" x 11.00" x 11.00"	8.00 lbs.	1.33 cu. ft.
TC-3H	23.00" x 11.00" x 11.00"	9.00 lbs.	1.61 cu. ft.
TC-3HS	20.00" x 11.00" x 11.00"	8.00 lbs.	1.40 cu. ft.
TC-5H	28.00" x 10.00" x 10.00"	10.00 lbs.	1.62 cu. ft.
TC-5H-S	28.00" x 10.00" x 10.00"	9.00 lbs.	1.62 cu. ft.
TC-10H	31.00" x 15.00" x 15.00"	17.00 lbs.	4.03 cu. ft.
TC15S	13.00" x 10.00" x 10.00"	5.00 lbs.	1.10 cu. ft.
TC15RS	13.00" x 10.00" x 10.00"	4.00 lbs.	1.10 cu. ft.
TC3S	13.00" x 10.00" x 10.00"	6.00 lbs.	1.10 cu. ft.
TCO308A000	13.00" x 15.00" x 16.00"	8.00 lbs.	1.80 cu. ft.
TCO417A000	25.00" x 15.00" x 17.00"	12.00 lbs.	3.68 cu. ft.
TCO419A000	25.00" x 17.00" x 15.00"	13.00 lbs.	3.69 cu. ft.
TCO421A000	25.00" x 15.00" x 17.00"	14.00 lbs.	3.68 cu. ft.
TCOC421G000	25.00" x 15.00" x 17.00"	14.00 lbs.	3.68 cu. ft.
TCORS000	10.00" x 14.00" x 14.00"	8.00 lbs.	1.13 cu. ft.
TCO308ARS000	18.00" x 11.00" x 16.00"	16.00 lbs.	3.00 cu. ft.
TCN	23.00" x 7.00" x 18.00"	10.00 lbs.	1.68 cu. ft.
TCNV	23.00" x 7.00" x 18.00"	10.00 lbs.	1.68 cu. ft.
TCNC	23.00" x 7.00" x 18.00"	10.00 lbs.	1.68 cu. ft.
TCNL	23.00" x 7.00" x 18.00"	10.00 lbs.	1.68 cu. ft.
TCN1510	23.00" x 7.00" x 18.00"	10.00 lbs.	1.68 cu. ft.
TCN14	23.00" x 7.00" x 18.00"	8.00 lbs.	1.68 cu. ft.
TCNV14	23.00" x 7.00" x 18.00"	8.00 lbs.	1.68 cu. ft.
TCNRS	13.00" x 15.00" x 10.00"	5.00 lbs.	1.13 cu. ft.

Iced Tea & Iced Coffee Dispensers (continued)

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
TCNRS21A000	32.00" x 12.00" x 18.00"	26.00 lbs.	4.00 cu. ft.

Coffee Grinders

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
GSG-3BLK	29.00" x 13.00" x 20.00"	52.00 lbs.	4.36 cu. ft.
SHG-10	26.00" x 15.00" x 20.00"	50.00 lbs.	4.51 cu. ft.
SLG-10	24.00" x 15.00" x 20.00"	42.00 lbs.	4.16 cu. ft.
ILGD-10	34.00" x 15.00" x 20.00"	62.00 lbs.	5.90 cu. ft.

Hot Water Dispensers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
WB2A10	39.00" x 27.00" x 15.00"	26.00 lbs.	5.25 cu. ft.
WB5N	34.00" x 15.00" x 20.00"	42.00 lbs.	5.90 cu. ft.
WB5NL	34.00" x 15.00" x 20.00"	42.00 lbs.	5.90 cu. ft.
WB5NB	34.00" x 15.00" x 20.00"	42.00 lbs.	5.90 cu. ft.
WB5NLB	34.00" x 15.00" x 20.00"	42.00 lbs.	5.90 cu. ft.
WB5GT63000	15.00" x 26.00" x 31.00"	39.00 lbs.	7.00 cu. ft.
WB5GT19000	15.00" x 26.00" x 31.00"	39.00 lbs.	7.00 cu. ft.
COR1B - HEADS	8.00" x 8.00" x 20.00"	4.00 lbs.	0.74 cu. ft.
COR1B - TOWER	24.52" x 11.07" x 20.52"	50.00 lbs.	6.53 cu. ft.
COR1W - HEADS	8.00" x 8.00" x 20.00"	4.00 lbs.	0.74 cu. ft.
COR1W - TOWER	24.52" x 11.07" x 20.52"	50.00 lbs.	6.53 cu. ft.

Syrup Warmers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
SW-1	17.00" x 11.00" x 11.00"	6.00 lbs.	1.19 cu. ft.
SW-2	18.00" x 14.00" x 14.00"	10.00 lbs.	2.04 cu. ft.

Decanter Warmers

MODEL #	HEIGHT x WIDTH x LENGTH	SHIP WEIGHT	SHIP CUBE
AW-1-10	3.00" x 8.00" x 11.00"	2.00 lbs.	0.15 cu. ft.
AW-2-10	3.00" x 9.00" x 15.00"	4.00 lbs.	0.23 cu. ft.
AW-2S-10	9.00" x 8.00" x 19.00"	8.00 lbs.	0.79 cu. ft.
AW-2SR-10	9.00" x 8.00" x 19.00"	8.00 lbs.	0.79 cu. ft.
AW-3SR-10	15.00" x 9.00" x 23.00"	8.00 lbs.	1.80 cu. ft.

Cups Per Hour



MODEL #	GALLONS/HOUR	OUNCES/HOUR	8 OZ CUP	12 OZ CUP	16 OZ CUP	20 OZ CUP
SERAPHIM BREWERS	10	1280	160	107	80	64
CGC/CGC1 BREWERS	5	640	80	53	40	32
GEMINI SINGLE BREWERS	10	1280	160	107	80	64
GEMINI TWIN BREWERS	21	2688	336	224	168	134
THERMOPRO SINGLE BREWERS	10	1280	160	107	80	64
THERMOPRO TWIN BREWERS	21	2688	336	224	168	134
D500 AIRPOT BREWERS	7	896	112	75	56	45
D1000 AIRPOT BREWERS	8	1024	128	85	64	51
D60 THERMAL CARAFE BREWERS	9	1152	144	96	72	58
TLP LOW PROFILE BREWERS	5	576	72	48	36	29
ALPHA 1 DECANTER BREWERS	4	512	64	43	32	26
ALPHA 2 DECANTER BREWERS	4	512	64	43	32	26
ALPHA 3 DECANTER BREWERS	9	1152	144	96	72	58
ALPHA 5 DECANTER BREWERS	9	1152	144	96	72	58
ALPHA 6 DECANTER BREWERS	9	1152	144	96	72	58
CAFEOP AIRPOT BREWERS	4	512	64	43	32	26
CAFEOPP THERMAL CARAFE BREWERS	4	538	67	45	34	27
CAFE POUROVER DECANTER BREWERS	4	538	67	45	34	27
RU-150 URN	13	1664	208	139	104	83
RU-225 URN	15	1920	240	160	120	96
RU-300 URN	13	1664	208	139	104	83
RU-600 URN	30	3840	480	320	240	192
RU-1000 Urn	30	3840	480	320	8	192
OMEGA SINGLE BREWERS	25	3200	400	267	200	160
OMEGA TWIN BREWERS	24	3072	384	256	192	154
G4 & G3 TEA BREWERS	12	1536	192	128	96	77
TEA/COFFEE COMBO BREWERS	12	1536	192	128	96	77
PCGT	10	1280	160	107	80	64
CAFEP	5	640	80	53	40	32
WB5N	15	1920	240	160	120	96
WB5GT	22	2752	344	229	172	138

*Approximate cups per hour information based on default factory settings with the highest power configuration.

Advanced Brew Basket Design



- ❶ Reduces over extraction in the bed center
- ❷ Integral splash pocket
- ❸ Non-metal body is thermally stable, cooler to the touch and provides superior heat retention
- ❹ Plastic body insulates the hot water during the brew process
- ❺ Plastic body is lighter, and thus safer when removing from brewer when filled with heavy, wet coffee grounds
- ❻ Interlaced radial rib design virtually eliminates filter collapse
- ❼ No clips needed
- ❽ The plastic brew basket also features a brown “hot coffee” flavor clip that creates a splash pocket to minimize splash and to protect from steam
- ❾ Non-slip, soft grip handle insert



Wilbur Curtis Co., Inc.

6913 Acco Street Montebello, CA 90640
(800) 421-6150 | (323) 837-2300
Tech Support: (800) 995-0417
www.wilburcurtis.com

