

G3 Tea Brewers



TBP
Polaris Low
Profile Brewer
(Dispenser included)



TB
Tea Brewer
(Dispenser sold separately)



STB
Sweet Tea Brewer
(Dispenser sold separately)



RTB
Rotating Tea
Brewer
(Dispensers sold separately)



TBT
Tall Tea
Brewer
(Dispenser sold separately)

Features

G3 Digital Control Module – Provides precise control for gourmet fine tuning with pulse-brewing, delay, and all critical brewing functions.

G3 Enhanced Tea Flavor and Clarity – With digital accuracy, two separate precision valves provide unsurpassed control over concentrate brewing and dilution cycles.

“Fast Brew” Option – Program selectable. Shortens brew time by allowing concentrate and dilution cycles to run at the same time.

Scroll-Through Precision Programming – Large, brightly lighted display communicates functions at a glance. Easily adjust time, volume, temperature, brew functions and more.

Cold Water Brew Lock-Out – Prevents brewing when water temperature is below set level.

STB Features

Complete with electric pump. Program selectable for regular or sweet tea.

RTB Features




Easily brew multiple teas from one brewer. Dual dilution spouts and rotating brew cone allows for brewing two teas without moving serving vessels.




G3 Tea Brewers


TBP

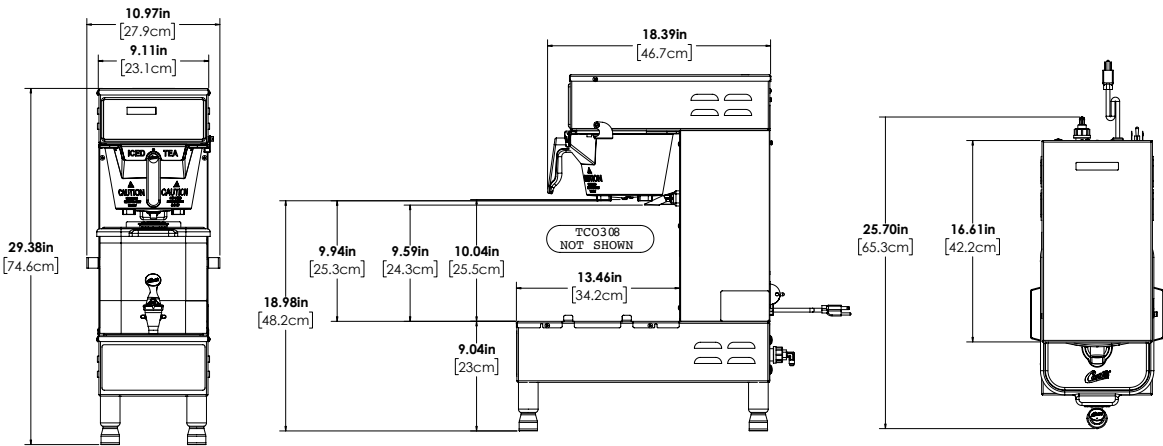

TB

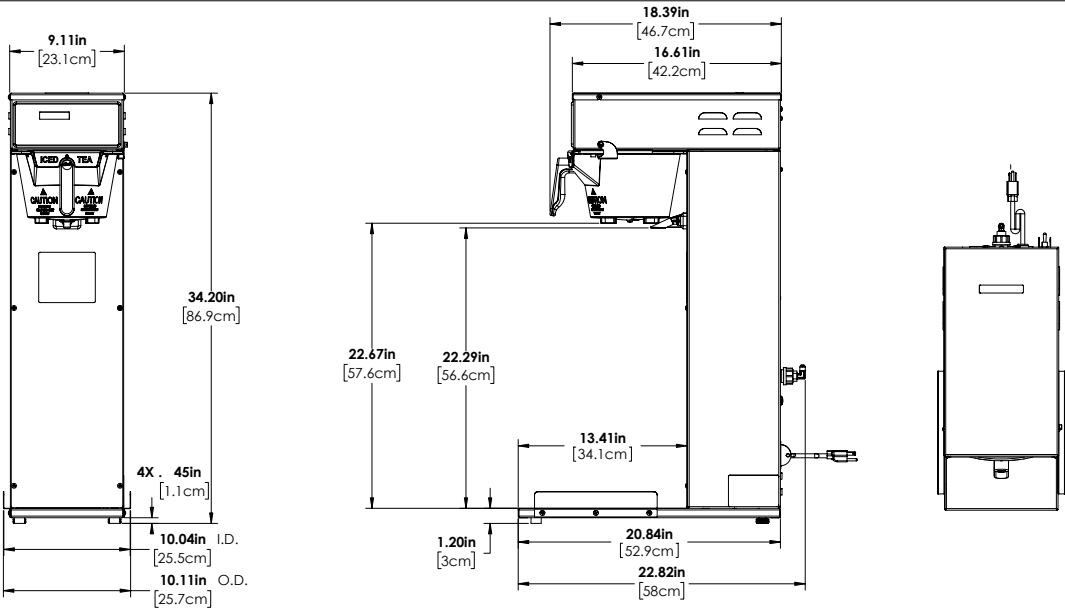


STB

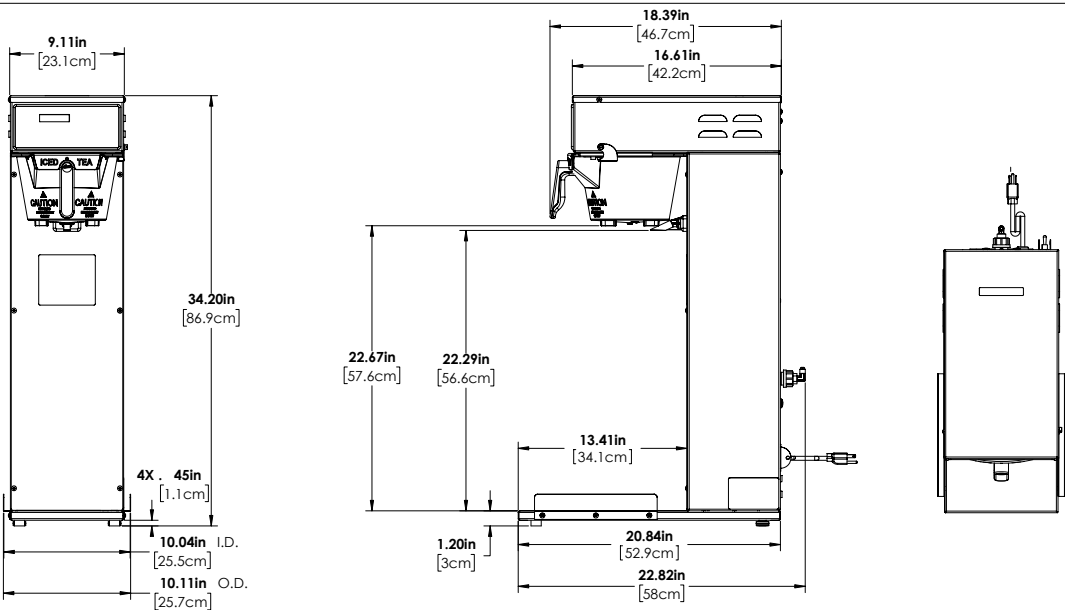


G3 Tea Brewers

RTB

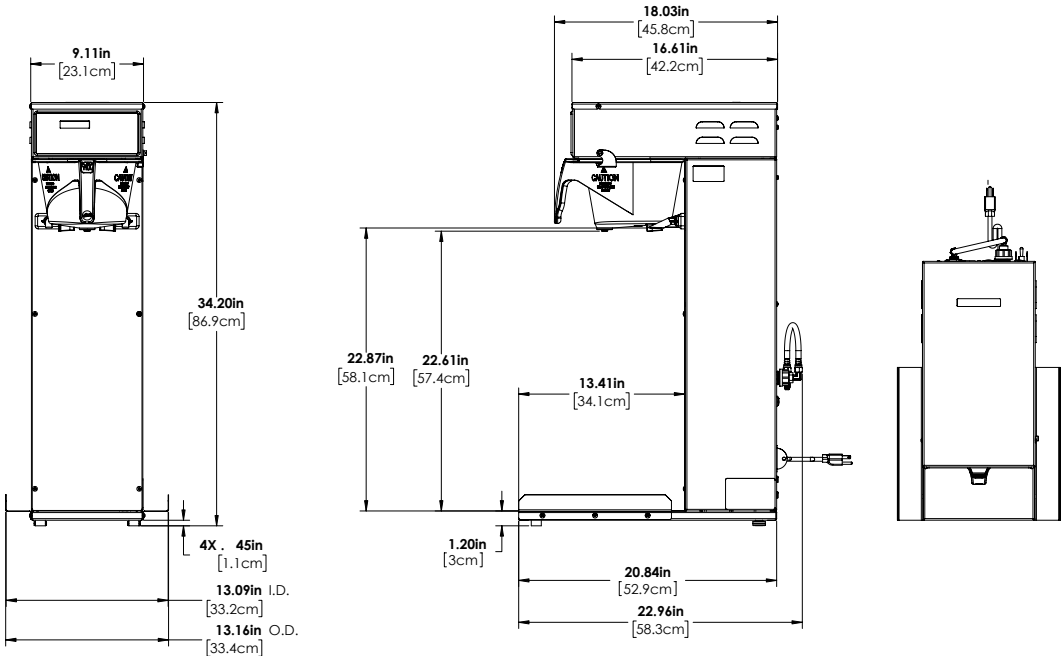

TBT

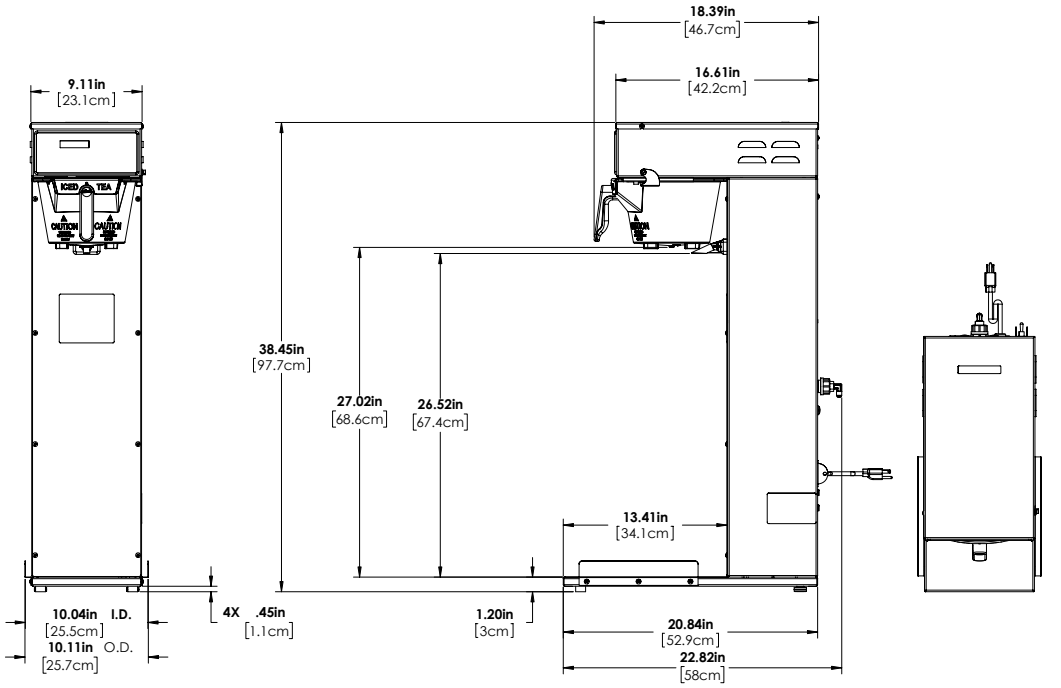

G3 Tea Brewers

Dimensions

MODEL#	DESCRIPTION	HEIGHT x WIDTH x DEPTH	BREWED FILL WEIGHT	BREWED GAL/HR
TBP	G3 Tea Brewer, Polaris Low Profile	29.38" x 10.97" x 25.70"	144.2 lbs	12.0
TB	G3 Tea Brewer, Short Tea Brewer	34.20" x 10.11" x 22.82"	144.2 lbs.	12.0
STB	G3 Tea Brewer, Short Sweet Tea Brewer	34.20" x 10.11" x 22.82"	280.9 lbs.	12.0
RTB	G3 Tea Brewer, Rotating Basket Tea Brewer	34.20" x 13.16" x 22.96"	280.9 lbs.	12.0
TBT	G3 Tea Brewer, Tall Tea Brewer	38.45" x 10.11" x 22.82"	144.2 lbs.	12.0

Utility Requirements

ELECTRICAL								WATER			
MODEL#	PHASE	VOLTS	AMPS	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MINIMUM FLOW RATE	TANK VOL.
TBP	1 PH	120V	13.8A	1 x 1600W	2W+G	1650W	50/60Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
TB	1 PH	120V	13.8A	1 x 1600W	2W+G	1650W	50/60Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
STB	1 PH	120V	13.8A	1 x 1600W	2W+G	1650W	50/60Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
RTB	1 PH	120V	13.8A	1 x 1600W	2W+G	1650W	50/60Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.
TBT	1 PH	120V	13.8A	1 x 1600W	2W+G	1650W	50/60Hz	1/4" Flare	20 - 90 psi	1.0 GPM	1.6 gal.



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

