Corinth® Under Counter Hot Water Dispenser



COR1W

Under Counter Hot Water Dispenser - Sky White (shown with brew kettle - not included)

Corinth® Features

Contemporary Design – Unique shape and size adds visual interest to any countertop.


Choice of Colors – Avalable in Sky White or Lustrous Black.

Three Programmable Buttons – Factory pre-set to two portion control, one manual dispense. User programmable from manual flow to 32 oz. dispensing.

Remote, Under Counter Heating System – Featuring Curtis G3 digital controls to accurately maintain set temperature from 170° to 208°F. (Factory pre-set at 208°F).

Innovative Internal Pre-Heat Exchanger Coil – Ensures accurate temperature hot water the moment it's dispensed... eliminates lag time.

Dual Voltage – Simplifies installation.

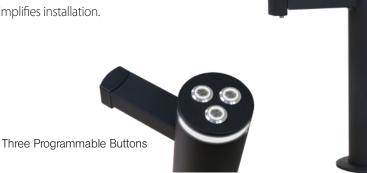







Corinth® Under Counter Hot Water Dispenser

COR1B/COR1W **Under Counter** Heating System

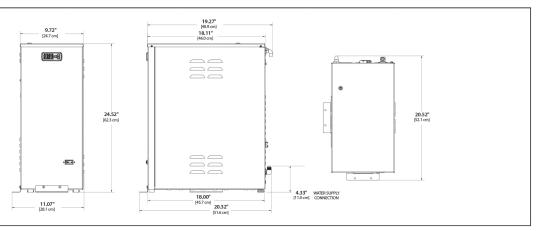

COR1B/COR1W

Hot Water Dispensing Faucet

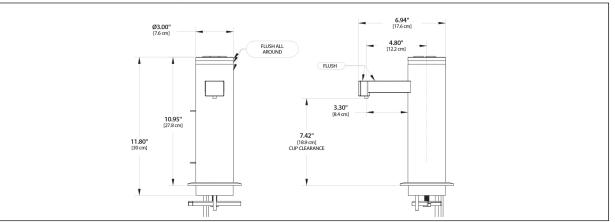

Specifications

MODEL #	DESCRIPTION	HEIGHT x WIDTH x DEPTH CUP CLEARANCE		BREWER FILL WEIGHT	BREWED GAL/HR	
COR1B	Under Counter Hot Water Dispenser - Black	24.52" x 11.07" x 20.52"	7.43"	81 lbs.	4.3/10.0	
COR1W	Under Counter Hot Water Dispenser - White	24.52" x 11.07" x 20.52"	7.43"	81 lbs.	4.3/10.0	

Utility Requirement	5
----------------------------	---

Utility Keq	ELECTRICAL				WATER							
MODEL#	PHASE	VOLTS	AMPS	MIN. CIRCUIT	HEAT CONFIG	WIRE	WATTS	HERTZ	CONNECTOR	PRESSURE	MIN. FLOW RATE	TANK VOL.
COR1B	1 PH	120/220 V	12.5/22.7 A	15/30A	2 X 2500 W	2W/3W + G	1500/5000 W	50/60 Hz	3/8″ flare	20 - 90 psi	2.0 gpm	5.0 gal.
COR1W	1 PH	120/220 V	12.5/22.7 A	15/30A	2 X 2500 W	2W/3W + G	1500/5000 W	50/60 Hz	3/8″ flare	20 - 90 psi	2.0 gpm	5.0 gal.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE









WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov



