




# **Curtis Primo Cappuccino**

Introducing Curtis' Next Generation of Primo Cappuccino Machines

### **Curtis Primo Cappuccino**

Rich in design, features and profits, Curtis Cappuccino Machines blend technology with simplicity to deliver delicious drinks cup after cup. Innovative features add convenient and trouble-free operation to these cappuccino dispensers. Designed with smooth, Euro-styled lines and an oversized backlit display each powered drink dispenser inspire impulse sales throughout the day.

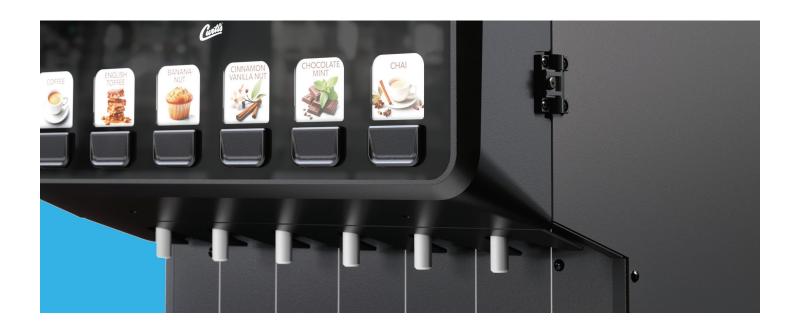

#### **Benefits and Features**



#### **Precision Programming**

Adjust powder flow in 5% increments and water temperature from 80°F to 200°F to create the perfect hot or cold beverage for your operation.

#### **Digital Control & LCD Digital Display**

Provides precise control over all critical blending and dispensing functions. Extra bright and easy to see.



#### **Up to 6 Dispensing Points**


Up to 6 dispensing stations with predispense or portion control.

#### **Direct Drive Mixing Augers**

Ensure smooth high-speed blending of powdered drinks.

#### **High Velocity Whipping Motors**

Sloped whipping motors ensure smooth, high-speed blending of powdered drinks.



#### **Fixed-Flow Water System**

Ensures precise drink blending regardless of irregularities in water pressure/volume.

#### **Digital Temperature Control**

Precisely Senses Water Temperature And Level To Maximize Energy Efficiency And Prevent Heating Element Burnout.

# **Model Configurations**









Model #	PCNG 3	PCNG 4	PCNG 5	PCNG 6
Dispensing Stations	3	4	5	6
Hoppers	3	4	5	6
Hopper Capacity	One 5 lb and Two 10 lb Hoppers	Two 5 lb and Two 10 lb Hoppers	Three 5 lb and Two 10 lb Hoppers	Two 3 lb, Three 5 lb and One 10 lb Hopper
Water Tank Volume	5.3 Gal	5.3 Gal	5.3 Gal	5.3 Gal
Dimensions (HxWxD)	36.24 x 14.64 x 23.08	36.24 x 21.23 x 23.08	36.24 x 21.23 x 23.08	36.24 x 21.23 x 23.08
Electrical Requirements	120V, 15Amps	120V, 15Amps	120V, 15Amps	120V, 15Amps
Wattage	1800W	1800W	1800W	1800W
Wire	2W+G	2W+G	2W+G	2W+G
Hertz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Water Connection	1/4" Flare	1/4" Flare	1/4" Flare	1/4" Flare
Water Pressure	20 - 90 PSI	20 - 90 PSI	20 - 90 PSI	20 - 90 PSI
Flow Rate	0.8 oz/sec	0.8 oz/sec	0.8 oz/sec	0.8 oz/sec
Gal/Hr	5.4	5.4	5.4	5.4
Certifications				

 ${\tt SPECIFICATIONS\,SUBJECT\,TO\,CHANGE\,WITHOUT\,NOTICE}$ 



WARNING - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

#### **Wilbur Curtis Company**

6913 Acco Street Montebello, CA 90640 Toll Free Phone: 800-421-6150 Phone: 323-837-2300

Fax: 323-837-2406



## **PERFECTING THE ART OF BREWING SINCE 1941**