


# Curtis Genesis Utility Specifications

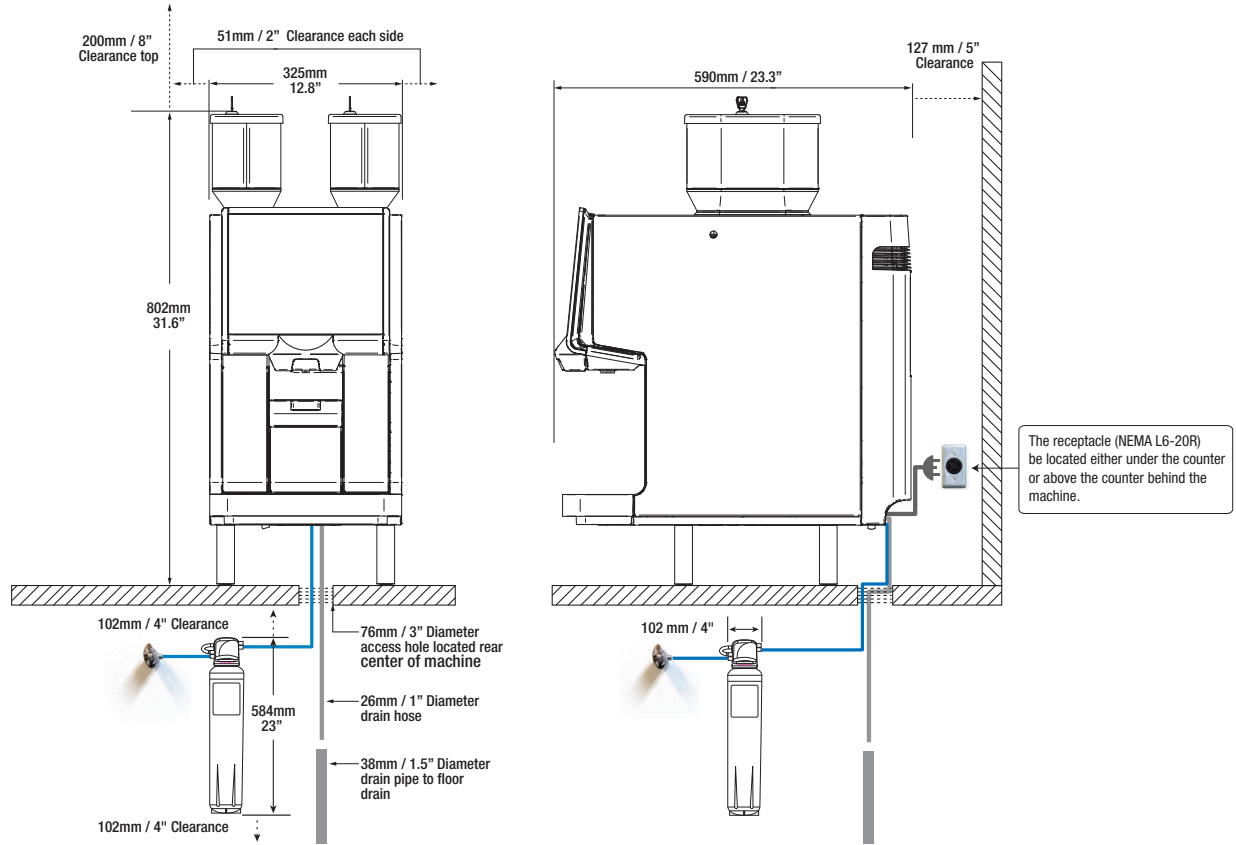

**Notes:** Access hole is only required if any of the utility hook-ups are located under the counter.

## POWER, WATER SUPPLY, AND ACCESS REQUIREMENTS

	<ul style="list-style-type: none"> <li>• Receptacle type: NEMA L6-20R</li> <li>• 3 Prong twist-lock</li> <li>• Breaker panel: 20 Amp dedicated 220V single phase circuit</li> <li>• Nominal power rating: 2.9–3.8kW</li> <li>• Power supply: 208–240V, 60Hz</li> </ul>		<p>The receptacle, water shut-off valve and drain pipe must be within 3 feet (36") of the center of the location (footprint) of the machine.</p>
	<ul style="list-style-type: none"> <li>• Access hole with collar (no sharp edges)</li> <li>• Located centrally under machine for water and drain hose</li> <li>• Diameter: Minimum 3"</li> </ul>		<p>Ideal under counter space for softener: 30" (minimum requirement: 26").</p>
	<ul style="list-style-type: none"> <li>• Water shut-off valve with 3/8" compression fitting</li> <li>• Back flow preventer in accordance with local requirements</li> </ul>		
	<ul style="list-style-type: none"> <li>• Drain pipe to floor drain</li> <li>• Copper or PVC in accordance with local health codes and regulations</li> <li>• Diameter: 1.5" or larger</li> </ul>		

