




## Specialty Dispenser Long-Term Power-Off Instructions


### Power-Off Procedure

- 1 To prepare the unit for an extended period of non-operation, simply turn the toggle switch, on the back of the chassis, to the "OFF" position.
- 2 Remove all of the canisters and empty them. Wash them in a mild solution of dish-washing soap and warm water. Insert them back into the unit when dry.

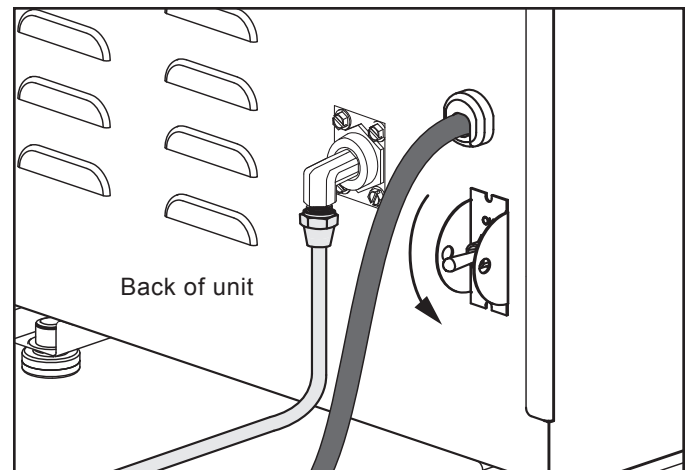

### Power-On Procedure

- 3 If the unit has not been used for over one (1) month, replace the water filter cartridge.
- 4 Turn the toggle switch on the back of the chassis to the "ON" position.

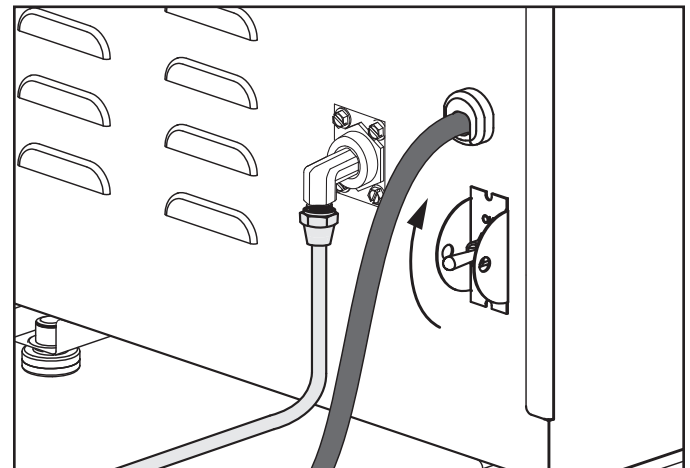

- 5 Place a container under one of the spouts.
- 6 With all of the canisters inside the unit empty, press and hold the PUSH dispensing button directly above the spout. Dispense several ounces of water.
- 7 If the water is not clear, dispense five (5) gallons of water from the unit into a container.
- 8 Fill the canisters with product to prepare for use. If you have questions about restoring this unit to operation after extended periods of non-use, please contact your service provider, agent or Curtis Technical Support.

